

LATEST CHANGES IN BURST AND SURGE STANDARDS

José Antonio Fernández
Sales Manager Western Europe and Middle East
AMETEK CTS



de Nederlandse EMC-ESD Vereniging
EMC-ESD Event 2021

Hotel Van der Valk Vianen
Dinsdag 23 november

LATEST EDITIONS

Burst: IEC 61000-4-4 Edition 3.0 (2012-04)

Surge: IEC 61000-4-5 Edition 3.1 (2017-08)

BURST - HISTORY

Date	Publication	Edition	Status
2012-04-30	IEC 61000-4-4:2012	3.0	Valid
2012-04-30	IEC 61000-4-4:2012 RLV	3.0	Valid
2011-03-30	IEC 61000-4-4:2004+AMD1:2010 CSV	2.1	Revised
2010-01-27	IEC 61000-4-4:2004/AMD1:2010	2.0	Revised
2007-06-06	IEC 61000-4-4:2004/COR2:2007	2.0	Revised
2006-08-15	IEC 61000-4-4:2004/COR1:2006	2.0	Revised
2004-07-08	IEC 61000-4-4:2004	2.0	Revised
2001-07-11	IEC 61000-4-4:1995/AMD2:2001	1.0	Revised
2000-11-09	IEC 61000-4-4:1995/AMD1:2000	1.0	Revised

IMPORTANT CHANGES IN IEC 61000-4-4 1/2

/ **Version IEC 61000-4-4:2004 (Edition 2.0)**

- The burst switch must be an electronic switch. It is not permitted to use a spark gap any longer
- Burst frequency 5 kHz at $T_d = 15$ ms or 100 kHz at $T_d = 0.75$ ms
- Calibration at coaxial output of the simulator with 50 Ω and 1000 Ω
- Calibration at output of the coupling network in Common Mode (all lines simultaneously) with 50 Ω
- Coupling on supply lines in Common Mode (all lines simultaneously)
- Tabletop units are to be placed 0.1m above the ground reference plane
- For coupling on supply lines the length of the supply line was reduced to 0.5 m

/ **Version IEC 61000-4-4:2004+A1:2010 (Edition 2.0)**

- The characteristics of the coupling-/ decoupling network were rectified and described precisely. Also the verification described in the Corrigendum 2 of 6/2007, which was internationally released, was not acceptable.

IMPORTANT CHANGES IN IEC 61000-4-4 2/2

/ **Version IEC 61000-4-4:2012 (Edition 3.0)**

- New version introduces calibration of capacitive coupling clamp. Procedure as well as impulse parameters are specified.
- Changes regarding calibration values at output of the coupling network:
 - Rise time (tr): $5,5\text{ns} \pm 1,5\text{ns}$
 - Pulse duration (td): $45\text{ns} \pm 15\text{ns}$
- Distance between DUT and coupling device, both coupling network and/or coupling clamp are:
 - Devices mounted on table: $0,5\text{m} (-0/+0,1\text{m})$
 - Floor Standing devices: $1,0\text{m} (+/-0,1\text{m})$
- Test setup for rack mounted equipment.

TEST LEVEL SINCE IEC 61000-4-4:2004


New repetition frequency of burst pulses is introduced!

Open circuit test voltage			
Level	Power line	I/O line	
	Peak voltage in kV		Repetition rate in kHz
1	0,5	0,25	5 or 100
2	1	0,5	5 or 100
3	2	1	5 or 100
4	4	2	5 or 100
X ⁽¹⁾	special	special	

Table 1 - test level

The **100 kHz** are merely a guideline, that could be adjusted by product committees to a more relevant variable for their product lines or products. In Annex A1 you will find representative values from real installations for your assistance.

SIMPLIFIED CIRCUIT DIAGRAM

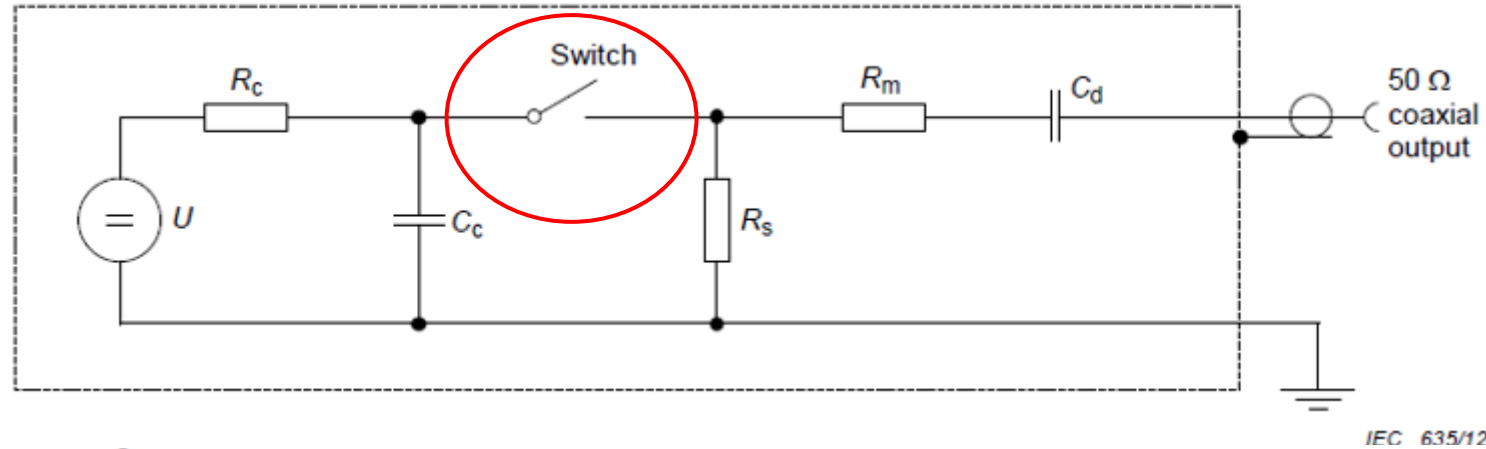

Components

U	high-voltage source
R_c	charging resistor
C_c	energy storage capacitor
R_s	impulse duration shaping resistor
R_m	impedance matching resistor
C_d	d.c. blocking capacitor
Switch	high-voltage switch

NOTE The characteristics of the switch together with stray elements (inductance and capacitance) of the layout shape the required rise time.


Figure 1 – Simplified circuit diagram showing major elements of a fast transient/burst generator

CHARACTERISTICS

Single pulse

Rise time $t_r = 5 \text{ ns}$

Pulse duration $t_d = 50 \text{ ns}$

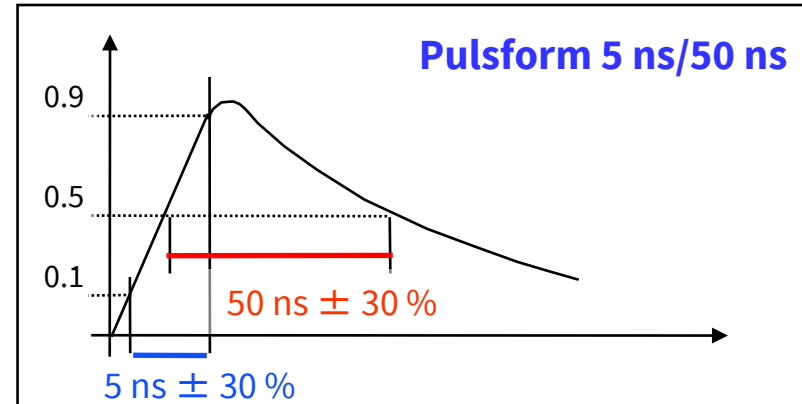


Pulse packet (Burst)

Repetition time $T_r = 300 \text{ ms}$

As formerly:

Duration burst packet $T_d = 15 \text{ ms}$

at spike frequency $f = 5 \text{ kHz}$

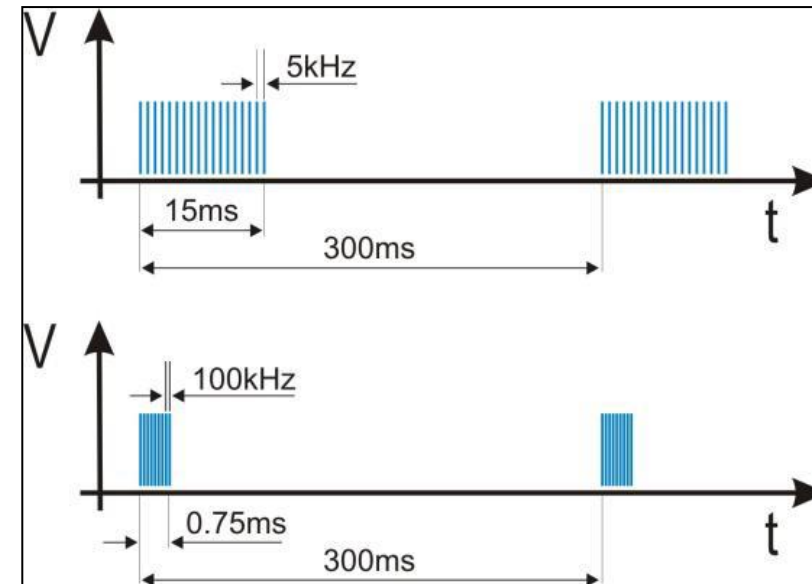

Newly added:

Duration burst packet $T_d = 0,75 \text{ ms}$

At spike frequency $f = 100 \text{ kHz}$

CHARACTERISTICS - WAVEFORM -

Output voltage range terminating with a load of 1000 Ω : min. 0.25 kV up to 4 kV;

Output voltage range terminating with a load of 50 Ω : min. 0.125 kV up to 2 kV;

Pulse repetition frequency: 5 kHz and 100 kHz \pm 20 %

Burst duration (see 6.1.2 and fig. 2):
15 ms \pm 20 % at 5 kHz
0.75 ms \pm 20 % at 100 kHz

Pulse shape

50 Ω Termination at coaxial output:
Rise time t_r = 5 ns \pm 30 %
Pulse duration (50 %-value) t_d = 50 ns \pm 30 %
Peak voltage = according table 2 \pm 10 %

1000 Ω Termination at coaxial out:
Rise time t_r = 5 ns \pm 30 %
Pulse duration (50 %-value) t_d = 50 ns with a limiting deviation
of - 15 ns bis + 100 ns
Peak voltage = according table 2 \pm 20 %

CHARACTERISTICS - OUTPUT VOLTAGE PEAK -

Set voltage	V_p (open circuit)	V_p (1 000 Ω)	V_p (50 Ω)	Repetition frequency
kV	kV	kV	kV	kHz
0,25	0,25	0,24	0,125	5 or 100
0,5	0,5	0,48	0,25	5 or 100
1	1	0,95	0,5	5 or 100
2	2	1,9	1	5 or 100
4	4	3,8	2	5 or 100


Measures should be taken to ensure that stray capacitance is kept to a minimum.

NOTE 1 Use of a 1 000 Ω load resistor will automatically result in a voltage reading that is 5 % lower than the set voltage, as shown in column V_p (1 000 Ω). The reading V_p at 1 000 Ω = V_p (open circuit) multiplied times 1 000/1 050 (the ratio of the test load to the total circuit impedance of 1 000 Ω plus 50 Ω).

NOTE 2 With the 50 Ω load, the measured output voltage is 0,5 times the value of the unloaded voltage as reflected in the table above.


Table 2 - Output voltage peak values and repetition frequencies

CALIBRATION AT THE COAXIAL OUTPUT, 50 OHM

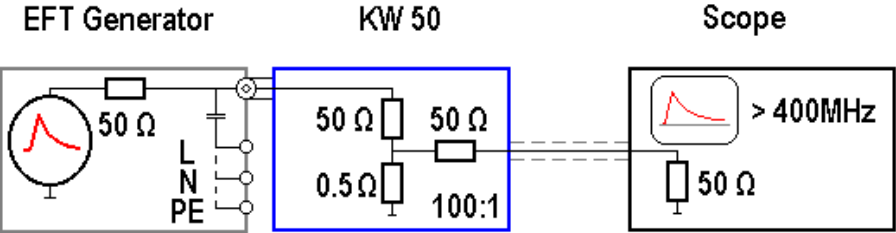

Ratio with KW50 -> 400:1
 Example: 2000V Burst = 5V on scope

CALIBRATION AT THE COAXIAL OUTPUT, 1000 OHM

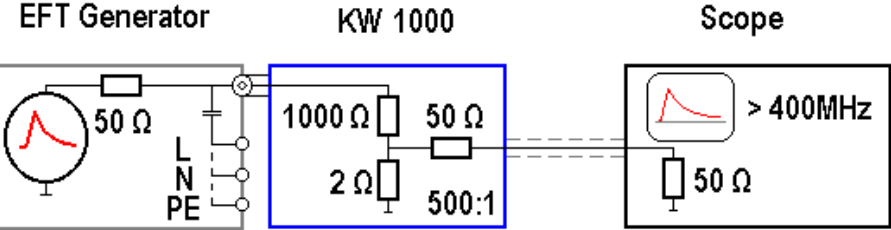

Ratio with KW1000 -> 1000:1
 Example: 2000V Burst = 2V on scope

CALIBRATION AT COUPLING/DECOUPLING NETWORK 1/3

Coupling/decoupling network for mains supply connectors

Proof of characteristics of coupling/decoupling network:

The pulse shape has to be proved at each output/path of coupling-/decoupling network

- Therefore all coupling paths are set simultaneously (Common Mode)
- The output of the coupling network is terminated with a coaxial load of 50 Ω

The calibration has to be provided with a voltage setting of 4kV as follows:

	since EN 61000-4-4:2004	New: EN 61000-4-4:2012
Rise time tr	5 ns \pm 30%	5,5ns \pm 1,5ns
Pulse duration td	50 ns \pm 30%	45ns \pm 15ns
peak value of voltage	\pm 10% of the voltage according to table	

Remark:

The procedure is as shown in the above norm, until publication of the Amendment A1 to IEC 61000-4-4 ed.2 from 01-2010 hotly contested. In its current version, the verification is made abundantly clear.

CALIBRATION AT COUPLING/DECOUPLING NETWORK 2/3

Procedure since Amendment A1 to IEC61000-4-4 ed.2 of 01/2010

The calibration is performed with the generator output at 4 kV. The generator is connected to the input of the coupling/decoupling network. Each individual output of the CDN (normally connected to the EUT) is terminated in a sequence with a 50 Ω load while the other outputs are open. The peak voltage and waveform are recorded for each polarity.


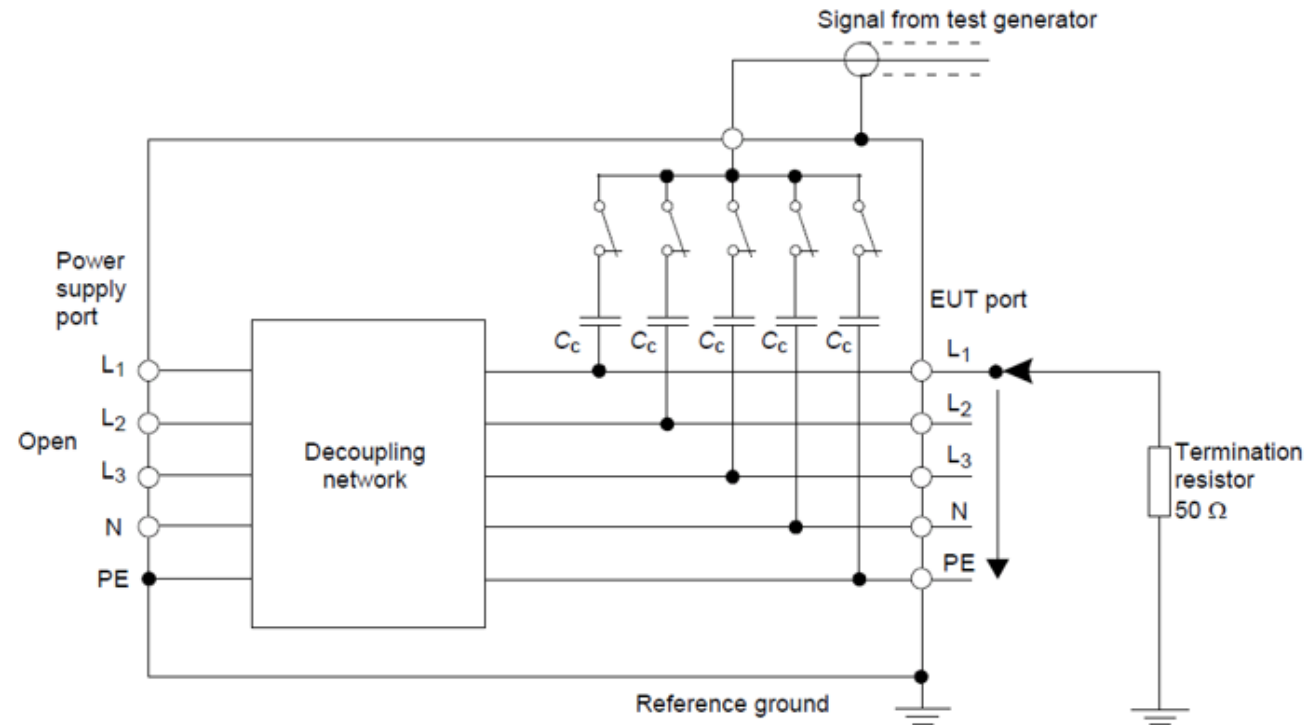


Figure 5 - Calibration of the waveform at the output of the coupling/decoupling network

CALIBRATION AT COUPLING/DECOUPLING NETWORK 3/3

- The EFT transients are coupled to all lines of the CDN simultaneously (CM).
- The output of the CDN shall not be short circuited.
- The EFT transients shall be measured at each individual output of the CDN with 50Ω load, while the other outputs are open.
- Each individual output must show the transients within the tolerances as specified.

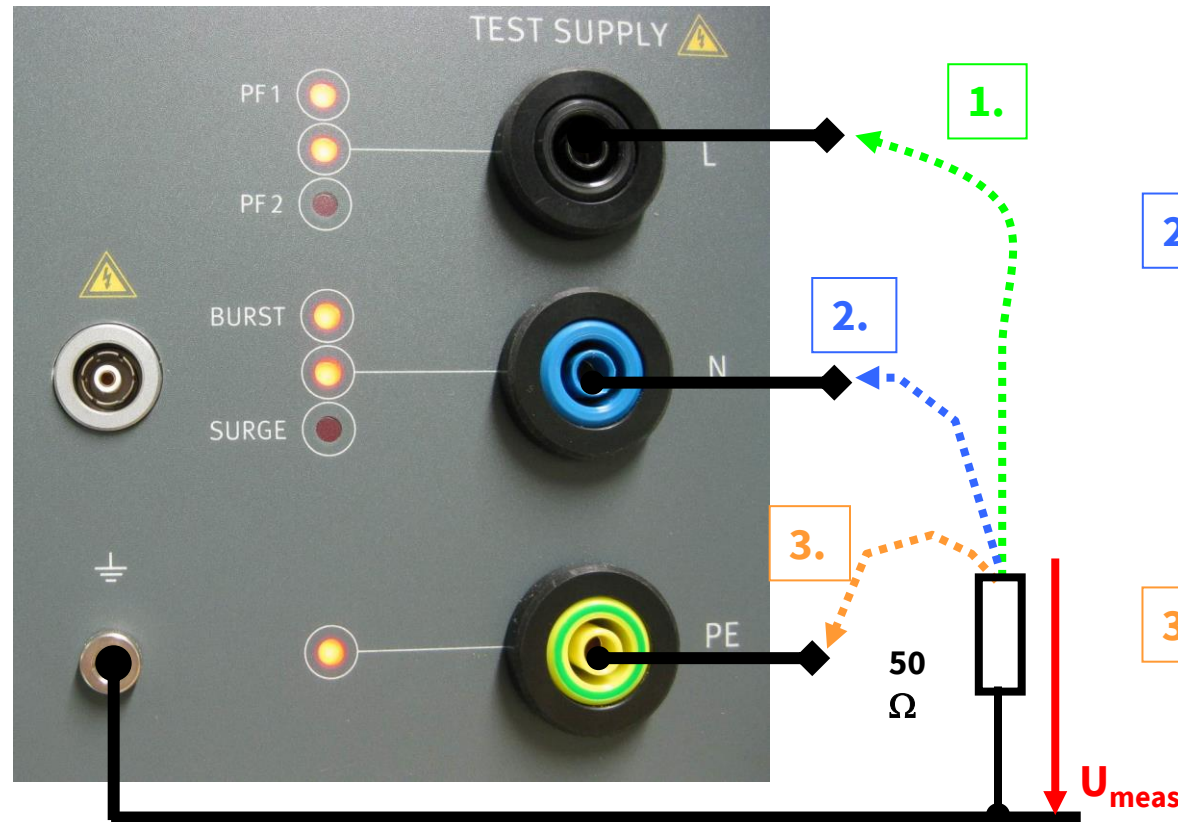

CALIBRATION OF CAPACITIVE COUPLING CLAMP 1/2

- The transducer plate consists of a metallic sheet of 120 mm x 1050 mm of max 0.5 mm thickness, isolated on top and bottom by a dielectric foil of 0.5 mm. Isolation for 2.5 kV on all sides must be guaranteed in order to avoid the clamp to contact the transducer plate.
- The transducer plate is to be inserted into the coupling clamp and must be terminated at the opposite end of the generator connection with a coaxial load of 50 Ω .
- The calibration is performed with the generator output voltage set to 2 kV. The calibration have to meet the following requirements:

Rise time tr	5 ns \pm 1,5 ns
Pulse duration td	50 ns \pm 15 ns
peak value of voltage	1 kV \pm 200 V


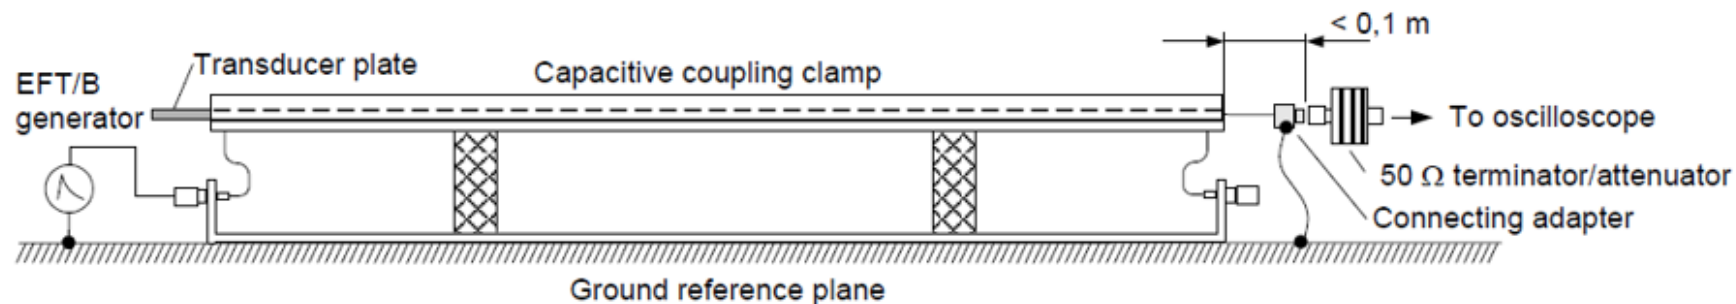


Figure 8 - Calibration of capacitive coupling clamp using the transducer plate

CALIBRATION OF CAPACITIVE COUPLING CLAMP 2/2

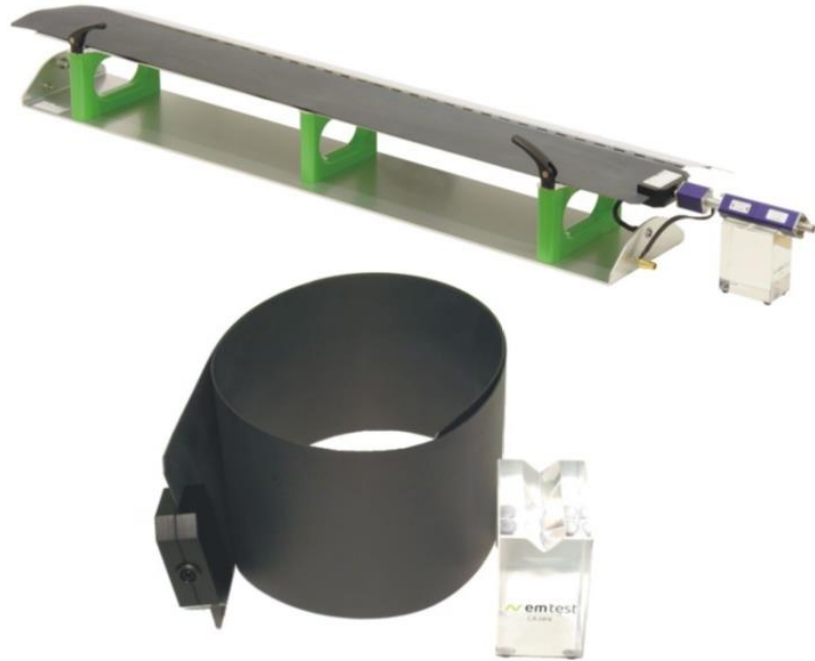

Calibration setup


of a capacitive coupling clamp using the transducer plate
acc. to figure 8 of IEC 61000-4-4:2012



COMMON MODE COUPLING

Coupling mode: „all lines against ground reference “


So, the coupling mode is a pure „Common Mode testing“. This means that the testing of single lines, line after line, is not demanded any more, but only all lines simultaneously must be supplied with burst pulses.

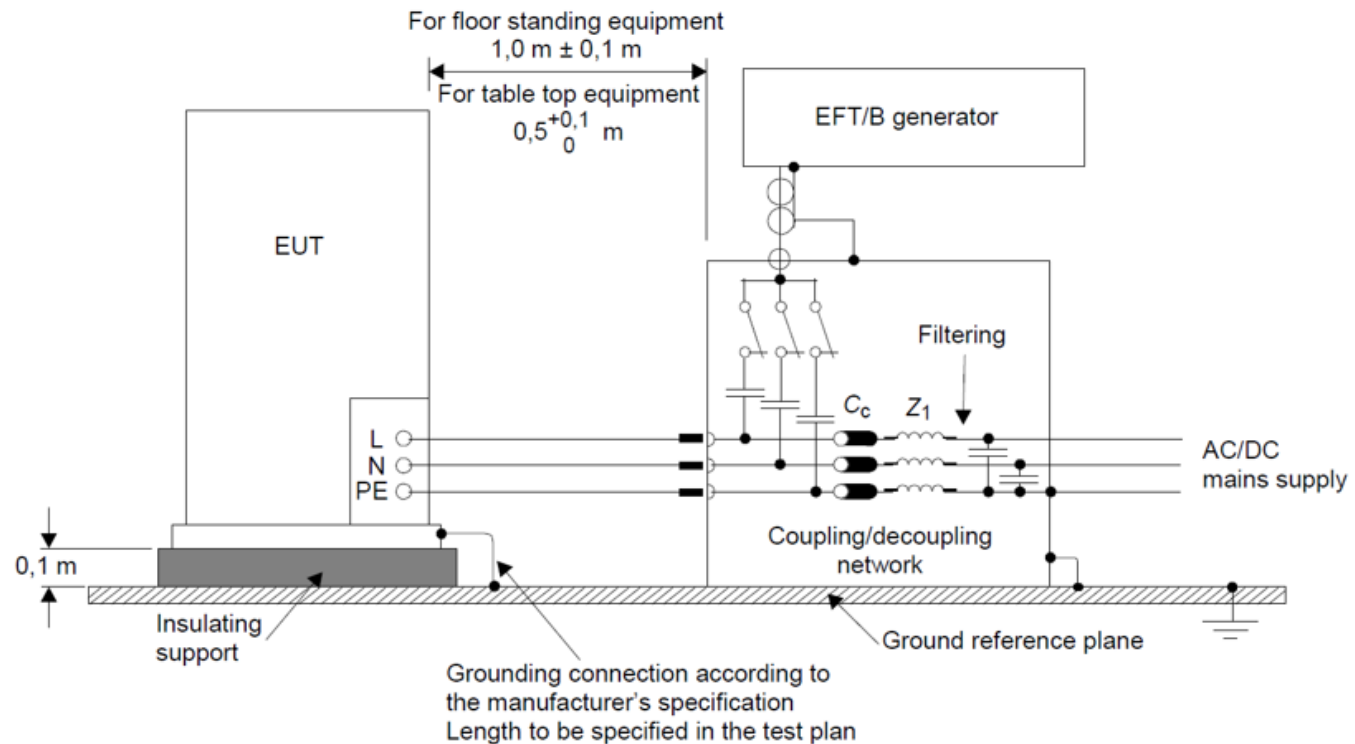

CABLE LENGTH EUT-CDN: ACC. IEC 61000-4-4:2012

Test set-up for type tests in laboratory on main supply lines

- The new standard defines the distance and not the cable length.
- There is a distinction between floor standing equipment and table top equipment.

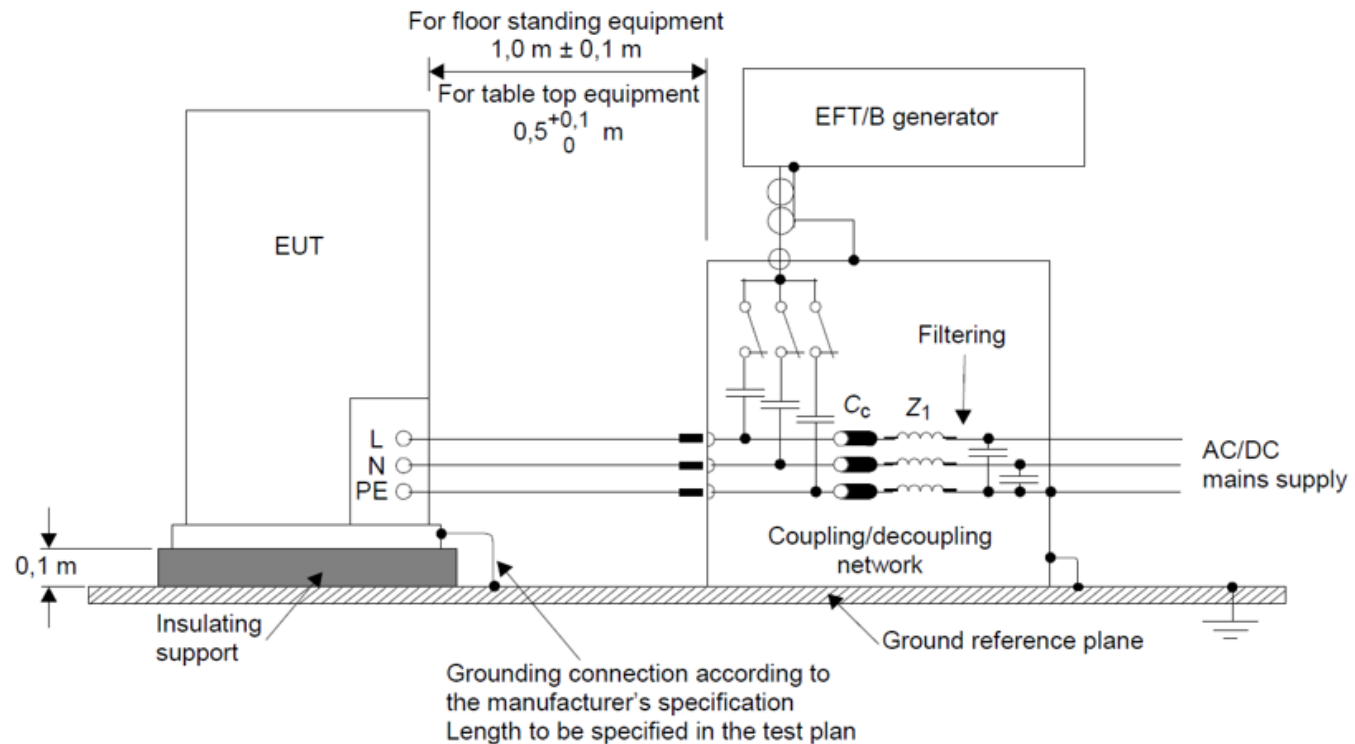

LATEST EDITIONS

Burst: IEC 61000-4-4 Edition 3.0 (2012-04)

Surge: IEC 61000-4-5 Edition 3.1 (2017-08)

SURGE - HISTORY

Date	Publication	Edition	Status
2017-08-04	IEC 61000-4-5:2014/AMD1:2017	3.0	Valid
2017-08-04	IEC 61000-4-5:2014+AMD1:2017 CSV	3.1	Valid
2009-10-20	IEC 61000-4-5:2005/COR1:2009	2.0	Revised
2005-11-29	IEC 61000-4-5:2005	2.0	Revised
2001-04-26	IEC 61000-4-5:1995+AMD1:2000 CSV	1.1	Revised
2000-11-09	IEC 61000-4-5:1995/AMD1:2000	1.0	Revised
1995-03-01	IEC 61000-4-5:1995/COR1:1995	1.0	Revised
1995-02-01	IEC 61000-4-5:1995	1.0	Revised

IMPORTANT CHANGES IN IEC 61000-4-5 ED. 3

- Pulse parameters changed , now it is only one-time definition of pulse shapes (front time T_f and pulse duration T_d)
- Verification of the Waveforms have to be made at the generator output (with $18\mu\text{F}$ in serial), and at the output of the coupling/decoupling networks.
- Harmonization of CDN up to 200 A
- New verification procedure for data line CDN ´s, new calibration table. For verification the open-circuit voltage and the short-circuit current will be measured. Additionally the AE-port should be open and not connected.
- The impedance for tests on shielded lines are $2\ \Omega + 18\ \mu\text{F}$.
- New test setup for shielded control lines which are grounded only at one end. In this case the lines will be tested like unshielded lines.
- No line-to-ground surges are applied for double-insulated products (i.e. products without any dedicated earth terminal). This applies to the power supply lines as well as for signal and data lines.
- The coupling network for symmetrical operated telecommunication lines which will be used for tests with the T-Surge waveform ($10/700\ \mu\text{s}$) is changed. The effective impedance of the coupling path has been changed.
- Measurement Uncertainty MU in annex D.

TEST LEVELS

Table 1 – Test levels

Level	Open-circuit test voltage $\pm 10\%$
	kV
1	0,5
2	1,0
3	2,0
4	4,0
X	Special

NOTE X can be any level, above, below or in between the other levels. This level can be specified in the product standard.

IEC 61000-4-5:2005 (Ed. 2)

Table 1 – Test levels

Level	Open-circuit test voltage	
	kV	
	Line-to-line	Line-to-ground ^b
1	---	0,5
2	0,5	1
3	1	2
4	2	4
X ^a	Special	Special

^a "X" can be any level, above, below or in between the others. The level shall be specified in the dedicated equipment specification.

^b For symmetrical interconnection lines the test can be applied to multiple lines simultaneously with respect to ground, i.e. "lines to ground".

IEC 61000-4-5:2017 (Ed. 3)

SURGE PULSE DEFINITION IEC 61000-4-5:2005 ED. 2 1/2

Table 2 – Definitions of the waveform parameters 1,2/50 μs – 8/20 μs

Definitions	In accordance with IEC 60060-1		In accordance with IEC 60469-1	
	Front time μs	Time to half value μs	Rise time (10 % – 90 %) μs	Duration time (50 % – 50 %) μs
Open-circuit voltage	1,2 \pm 30 %	50 \pm 20 %	1 \pm 30 %	50 \pm 20 %
Short-circuit current	8 \pm 20 %	20 \pm 20 %	6,4 \pm 20 %	16 \pm 20 %

NOTE In existing IEC publications, the waveforms 1,2/50 μs and 8/20 μs are generally defined according to IEC 60060-1 as shown in Figures 2 and 3. Other IEC recommendations are based on waveform definitions according to IEC 60469-1 as shown in Table 2.


Both definitions are valid for this part of IEC 61000 and describe just one single generator.

SURGE PULSE DEFINITION IEC 61000-4-5:2005 ED. 2 2/2

Definition according IEC 60060-1:

Front time: $T_1 = 1.67 \times T = 1.2 \mu\text{s} \pm 30 \%$

Time to half value: $T_2 = 50 \mu\text{s} \pm 20 \%$

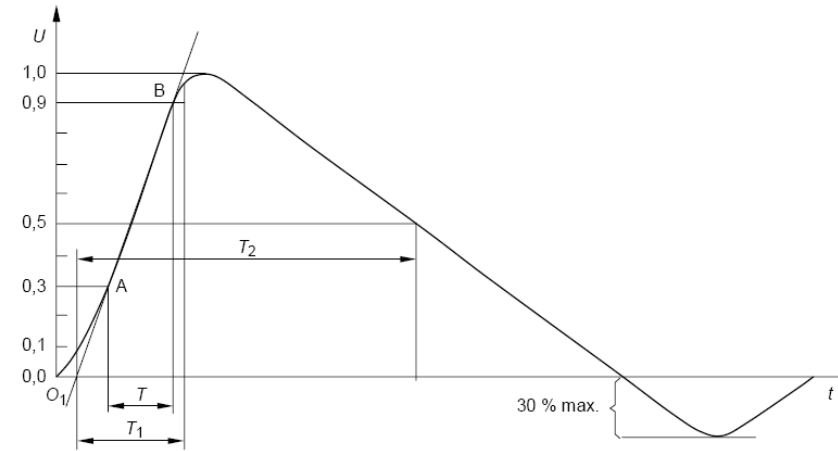


Front time: $T_1 = 1.67 \times T = 1.2 \mu\text{s} \pm 30 \%$
 Time to half-value: $T_2 = 50 \mu\text{s} \pm 20 \%$

Definition according IEC 60469-1:

Rise time (10% - 90%): $t_r = 1 \mu\text{s} \pm 30 \%$

Duration time (50% - 50%): $t_d = 50 \mu\text{s} \pm 30 \%$

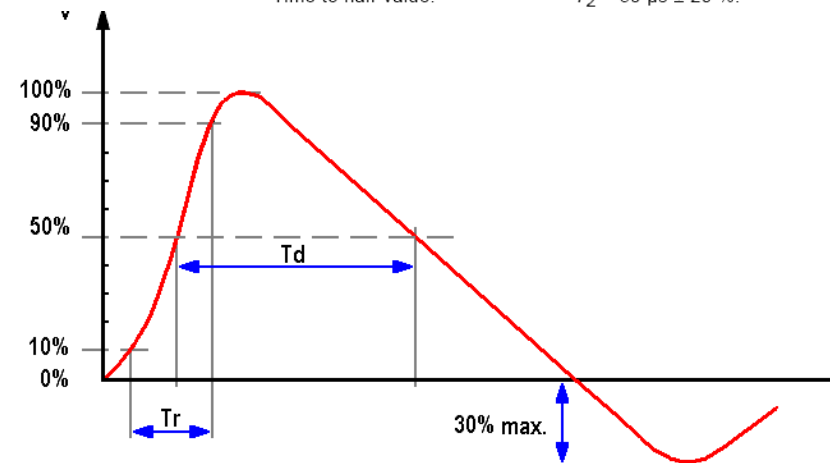


SURGE PULSE DEFINITION IEC 61000-4-5:2017 ED. 3

- **Open circuit voltage :** 1.2/50 μs

Front Time: $T_f = 1.67 \times T = 1.2 \mu\text{s} \pm 30 \%$

Duration: $T_d = T_w = 50 \mu\text{s} \pm 20 \%$

NOTE: The open circuit voltage waveform at the output of the coupling/decoupling network may have a considerable undershoot, in principle as the curve shown in Figure

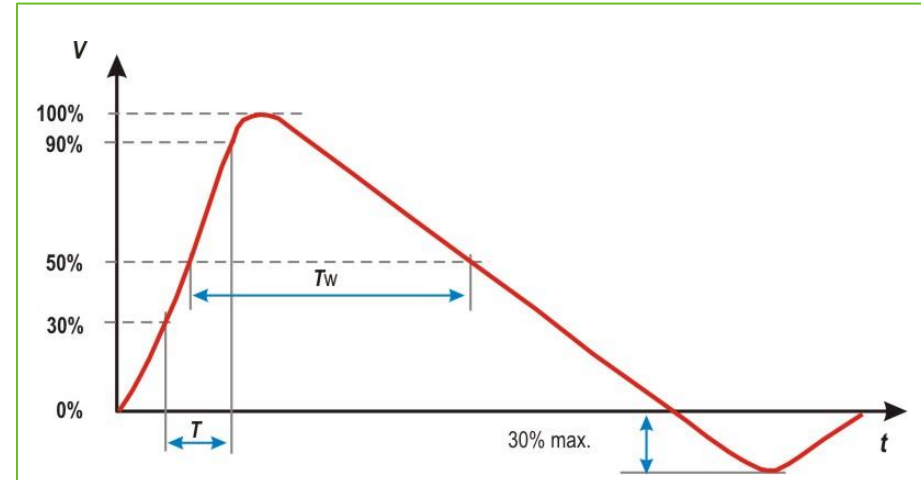


- **Short circuit current:** 8/20 μs

Front Time : $T_f = 1.25 \times T_r = 8 \mu\text{s} \pm 20 \%$

Duration: $T_d = 1.18 \times T_w = 20 \mu\text{s} \pm 20 \%$

NOTE : The 30 % undershoot specification applies only at the generator output. At the output of the coupling/decoupling network there is no limitation on undershoot or overshoot.

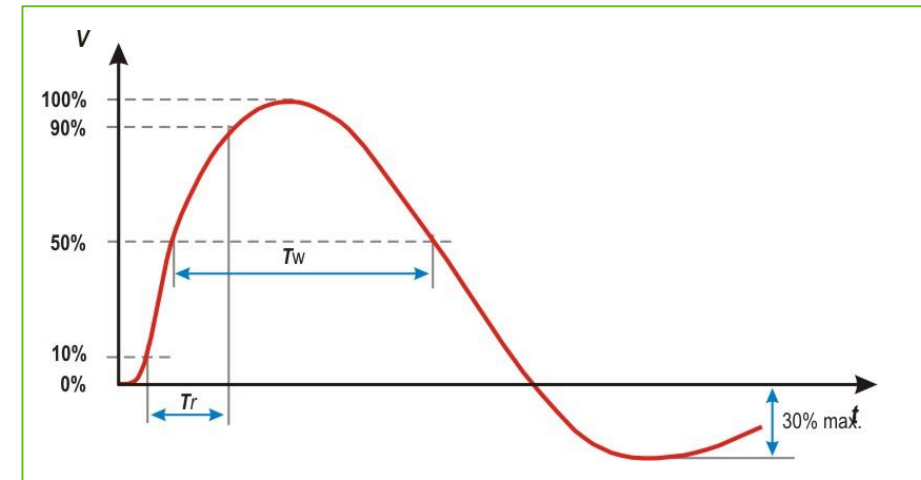

CALIBRATION COUPLING NETWORK IEC 61000-4-5:2017 ED. 3 1/2

6.4.2 Calibration of CDNs for a.c./d.c. mains supply rated up to 200A per line

The characteristics of the CDN shall be measured under *open-circuit* conditions (load greater than or equal to 10 kOhm) and under *short-circuit* conditions at the same set voltage.

All performance characteristics stated in 6.3.2 Tables 4 and 5 shall be met at the CDN output.

Table 4 – Voltage waveform at EUT port of CDN

Surge voltage parameters under open-circuit conditions ^a	Coupling impedance	
	18 µF	9 µF + 10 Ω
Peak voltage		
Current rating ≤ 16 A	Set voltage +10 %/-10 %	Set voltage +10 %/-10 %
16 A < Current rating ≤ 32 A	Set voltage +10 %/-10 %	Set voltage +10 %/-10 %
32 A < Current rating ≤ 63 A	Set voltage +10 %/-10 %	Set voltage +10 %/-15 %
63 A < Current rating ≤ 125 A	Set voltage +10 %/-10 %	Set voltage +10 %/-20 %
125 A < Current rating ≤ 200 A	Set voltage +10 %/-10 %	Set voltage +10 %/-25 %
Front time	1,2 µs ± 30 %	1,2 µs ± 30 %
Duration		
Current rating ≤ 16 A	50 µs +10 µs/-10 µs	50 µs +10 µs/-25 µs
16 A < Current rating ≤ 32 A	50 µs +10 µs/-15 µs	50 µs +10 µs/-30 µs
32 A < Current rating ≤ 63 A	50 µs +10 µs/-20 µs	50 µs +10 µs/-35 µs
63 A < Current rating ≤ 125 A	50 µs +10 µs/-25 µs	50 µs +10 µs/-40 µs
125 A < Current rating ≤ 200 A	50 µs +10 µs/-30 µs	50 µs +10 µs/-45 µs

^a The measurement of the surge voltage parameters shall be done with the a.c./d.c. mains supply port of the CDN open-circuit.

New in Ed. 3


- Waveshape defined for common mode coupling to PE
- Tolerances are **increased** at higher current in the coupling network.

Decoupling inductivity:

- Maximum 1.5 mH
- Voltage Drop CDN < 10%

CALIBRATION COUPLING NETWORK IEC 61000-4-5:2017 ED. 3 2/2

It is the intention of this standard that the output waveforms meet specifications at the point where they are to be applied to the EUT. The characteristics of the generator shall be measured under:

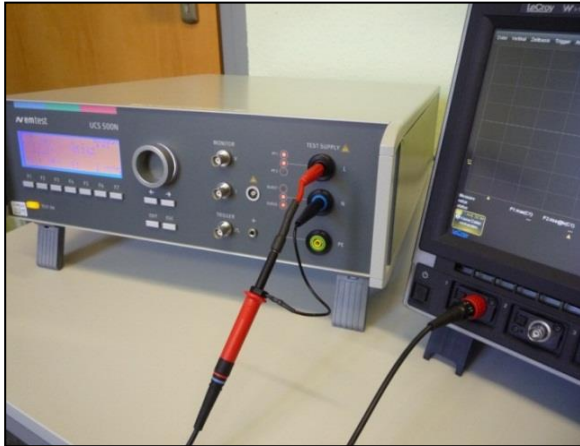

Open circuit voltage with HV-Probe

each:
DM: L-N
CM: L-PE
CM: N-PE



Short circuit current with current probe

each:
DM: L-N
CM: L-PE
CM: N-PE



CALIBRATION OF CDNS FOR UNSYMMETRICAL INTERCONNECTION LINES

New in Ed. 3: Waveform specification for unsymmetrical interconnection lines – was NOT specified in Ed. 2

Table 8 – Surge waveform specs. at the EUT port of the CDN

Coupling method	CWG Output voltage ^{1,2,3)}	Voc at CDN EUT output ± 10 %	Voltage Front time T_f $T_f = 1,67 \times T_r$ ± 30 %	Voltage Duration T_d $T_d = T_w$ ± 30 %	I_{sc} at CDN EUT output ± 20 %	Current Front Time T_f $T_f = 1,25 \times T_r$ ± 30 %	Current Duration T_d $T_d = 1,18 \times T_w$ ± 30 %
Line to PE R = 40 Ω CD = 0,5 μF	4 kV	4 kV	1,2 μs	38 μs	87 A	1,3 μs	13 μs
Line to PE R = 40 Ω CD = GDT	4 kV	4 kV	1,2 μs	42 μs	95 A	1,5 μs	48 μs
Line to Line R = 40 Ω CD = 0,5 μF	4 kV	4 kV	1,2 μs	42 μs	87 A	1,3 μs	13 μs
Line to Line R = 40 Ω CD = GDT	4 kV	4 kV	1,2 μs	47 μs	95 A	1,5 μs	48 μs

¹⁾ It is recommended to calibrate the CDN at the highest rated pulse voltage, as this will minimise the effects of the switching noise generated by CLDs and GDTs. The value shown in the table is for a generator setting of 4kV. In case the CDN is rated for another maximum pulse voltage, the calibration shall be done at this maximum rated pulse voltage. The short circuit peak current specification shall be adapted accordingly. e.g. If the Maximum voltage is 1kV the short circuit current value shown in this table shall be multiplied by 1/4

²⁾ Coupling via gas arrestors, clamping or avalanche devices will show some switching noise on the pulse waveform. Working with the highest possible pulse voltage will minimise their impact on measurements; it is recommended to neglect the switching noise for the front times and duration values measurements.

³⁾ The values shown in this table are for a CWG with ideal values. In case the CWG generates parameter values close to the tolerances, the additional tolerances of the CDN may generate values out of tolerances for the CWG-CDN combination.

CALIBRATION PROCESS FOR SYMMETRICAL INTERCONNECTION LINES

New in Ed. 3: Measurements shall be performed with the impulse applied to one coupling path at a time.

The peak amplitude, the front time and impulse duration shall be measured for the CDN rated impulse voltage under open-circuit conditions.

The inputs of the CDN at the auxiliary equipment (AE) side shall be short circuited to PE for the impulse voltage and impulse current measurement at the EUT output port.

	Coupling		Measuring		AE side	EUT side	
Surge voltage at EUT side	Common mode – all lines to PE *) 40 Ω path		All lines shorted together Peak voltage, front time, duration		All lines shorted to PE	Open circuit – all lines connect together	
Surge current at EUT side	Common mode – all lines to PE *) 40 Ω path		All lines shorted together Peak current, front time, duration		All lines shorted to PE	All lines shorted to PE	
Residual voltage on AE side	Common mode – all lines to PE *) 40 Ω path		Line to PE at a time Peak voltage		Open circuit	Open circuit	
*) 40 Ω path means that the transfer impedance is always 40 Ω, this means that for coupling to 1 pair 80 Ω per line or 40 Ω per pair are used, for coupling to 2 pairs 160 Ω per line or 80 Ω per pair are used, for coupling to 4 pairs 320 Ω per line or 160 Ω per pair are used.							
Coupling method	CWG Output voltage 1), 2), 3)	Voc at CDN EUT output ± 10 %	Voltage Front time T_r ± 30 %	Voltage Duration T_d ± 30 %	I_{sc} at CDN EUT output ± 20 %	Current Front Time T_r ± 30 %	Current Duration T_d ± 30 %
Common mode CD, 40 Ω path	2 kV	2 kV	1,2 μs	42 μs	48 A	1,5 μs	45 μs


Table 9: Calibration process

Table 10: Waveform specification

FLOW CHART FOR COUPLING METHOD


New in Ed.3

Selecting the coupling/decoupling network method

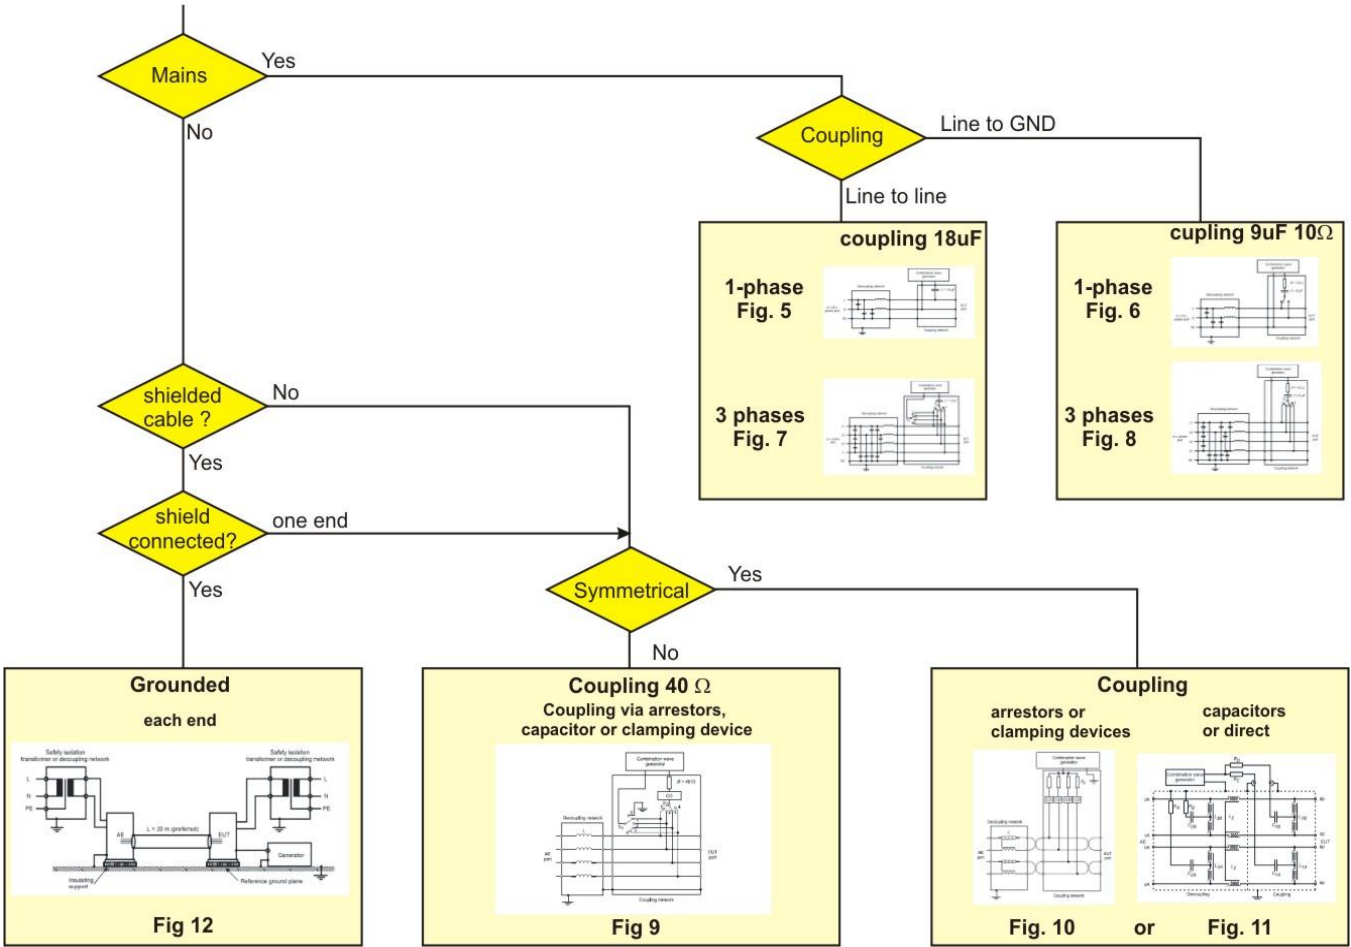

TEST SET-UP FOR SHIELDED LINES GROUNDED AT BOTH SIDES

For EUTs which do not have metallic enclosures, the surge is applied directly to the shielded cable at the EUT side.

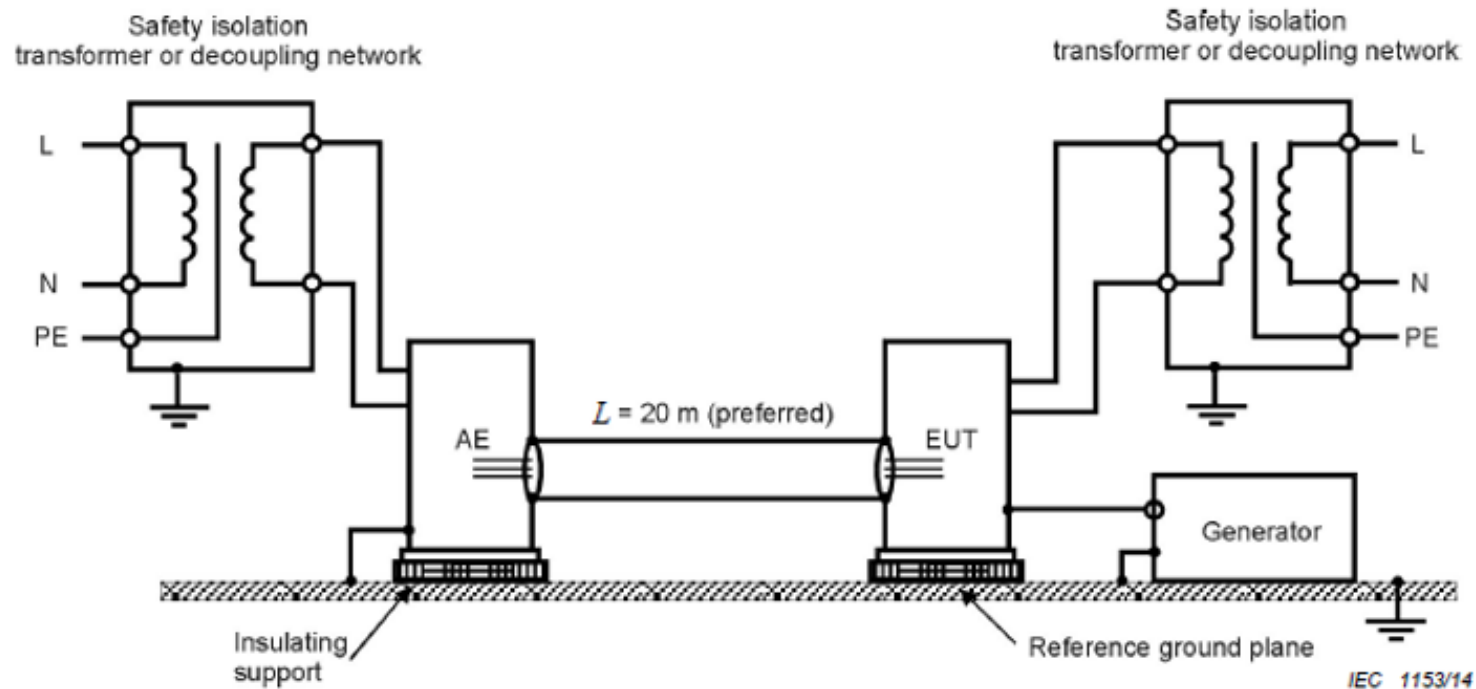

Generator impedance for tests on shielded lines:

IEC 61000-4-5 Ed. 2

➤ **2 Ohm**


new: IEC 61000-4-5 Ed. 3

➤ **2 Ohm + 18 μF**

TEST SET-UP FOR SHIELDED LINES GROUNDED ONLY AT ONE END

According to IEC 61000-4-5:2004:

The test is done with an open end at the AE side.

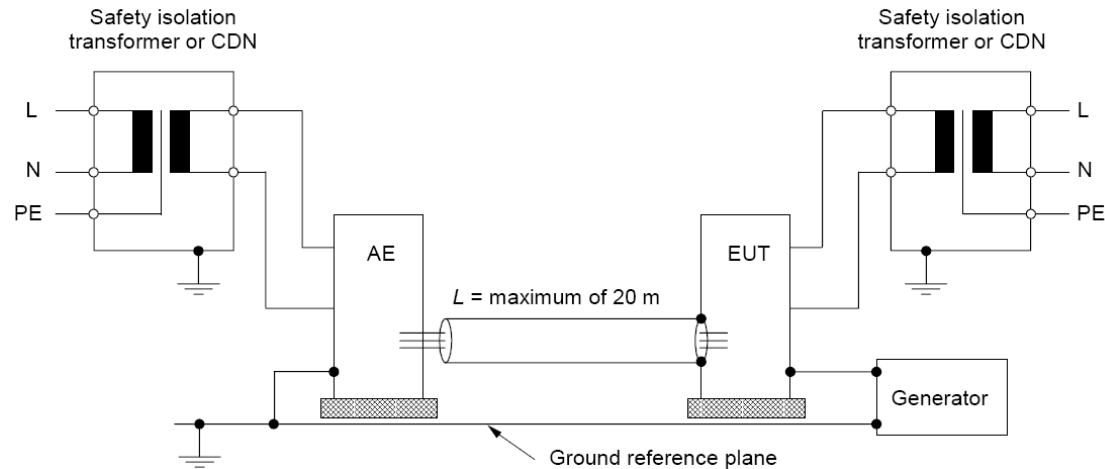

According to **IEC61000-4-5 Ed. 3:**

The test is done as for unshielded asymmetrically operated I/O lines

600 Rules for application of the surge to shielded lines:

601 a) *Shields grounded at both ends*

602 – the test shall be carried out according to Figure 12.

603 The test level is applied on shields with a 2Ω generator source impedance.

604 b) *Shields grounded at one end*

605 – the test shall be carried out according to 7.4 or 7.5 (see Figure 4) because the shield does not
606 provide any protection against surges induced by magnetic fields.

607 NOTE In this case, surge testing is not applied to the shield.

608 For EUTs which do not have metallic enclosures, the surge is applied directly to the shielded cable at the
609 EUT side.

COUPLING ON HIGH-SPEED I/O LINES

Figure 11 shows an example of a coupling and decoupling network for symmetrical interconnection lines allowing tests with interconnection speed up to 1 000 Mbit/s.



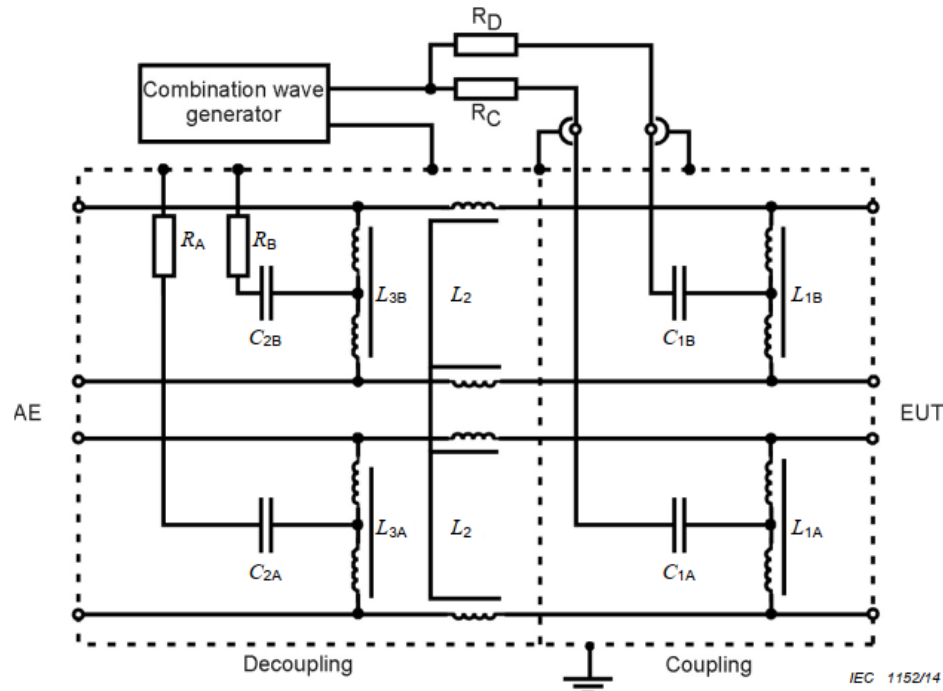


Figure 11 - Example of CDN for unshielded symmetrical interconnection lines

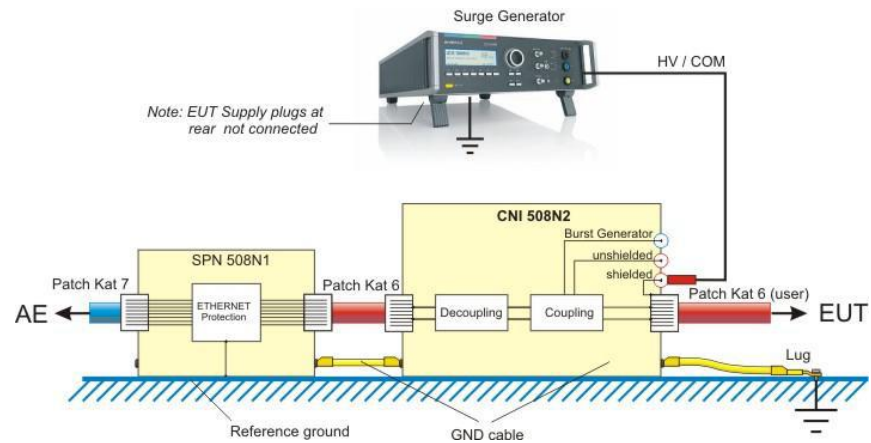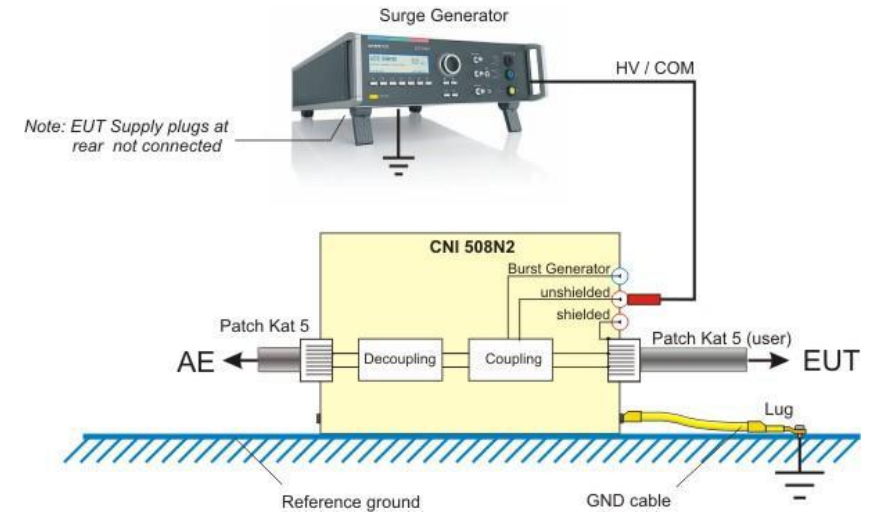

On behalf of **AMETEK**[®] and **Accelonix**

THANK YOU !

You can contact us via Accelonix B.V.

de Nederlandse EMC-ESD Vereniging
EMC-ESD Event 2021

Hotel Van der Valk Vianen
Dinsdag 23 november