



947



ADT 947 CO₂ In-line Injector

ADT Model 947- CO₂ In-line Injector is a system that decreases the resistivity of deionized (DI) water to a predefined level, preventing damages associated with static discharge and particle adhesion during the dicing and cleaning processes.

Low and Stable Resistivity

ADT Model 947 is especially designed to work with a dicing saw. The unit will compensate for water flow fluctuations; stopping the CO₂ supply once the supplied water is stopped. When the water flow is back, the CO₂ supply immediately returns, bringing the water resistivity back to the required value in just a-few seconds.

Process Control

Using a unique membrane technology for dissolving CO₂ gas into the supplied DI water, together with a PID base control system, the 947 In-line Injector compensates for changes in water parameters and ensures a stable level of water resistivity.

Efficient, Economic and Eco Friendly

The 947 unit is an inline injector which continuously monitors the water stream, injecting the exact required amount of CO₂ gas directly into the water stream for achieving the set resistivity level.

The minimal consumption of CO₂, together with the fact the system does not include a pump or reservoir, makes it super economic with very low CO₂ and power consumption.

Compact Design, Easy Installation

The 947 In-line Injector is ultra compact no bigger than a PC, and can easily be connected to the back of the dicing system, saving precious clean room space.

The unit includes fast facility connections located on its rear panel, providing a quick and simple plug and play installation, and the ability to support any type of dicing Saw.

System Highlights

- Compact and economic design
- Maintain low and stable resistivity value
- Easy to use and maintain
- Process monitoring through control system and alarms displays
- Eco friendly



Accelonix
keeping you ahead.

ADT = Dicing
Advanced Dicing Technologies



Increasing Yield Through Process Control

Specifications:

Resistivity range	0.5-1 MΩ/cm
Resistivity fluctuation range	Setting ±10%
Water consumption*	3-10 liter/min

Facility requirements

•Cutting water (Typically DI)

Pressure	3 to 4 bar
Temperature	20 to 25C°
Resistivity	10-18 MΩ/cm

•CO₂**

Pressure	2-4 bar
Purity	99.5% or higher

•Power

Voltage	100/230VAC, 50/60 Hz, single phase
Consumption	100 VA

•Dimensions (W x D x H)

	190 X 446 x 365mm
--	-------------------

•Weight


	10 Kg.
--	--------

*The unit supports one dicing saw


**Unit does not include CO₂ tank

Standard Features

- Two lines display
- Target and range setting
- Status and alarm indicators
- Auto temperature compensation

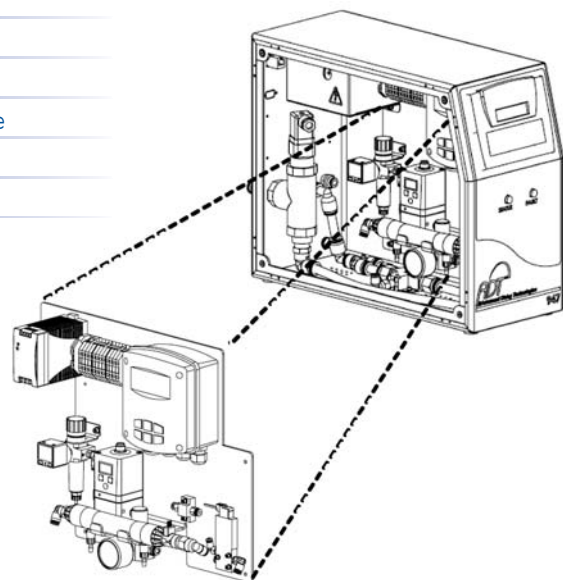

947's Internal Design

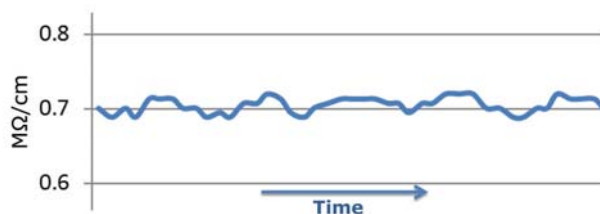

947's sample resistivity reading over time



Accelonix BV
 Luchthavenweg 18b • NL-5657 EB •
 Eindhoven • The Netherlands •
 T: +31 40 750 1650 • E: info@accelonix.nl

Headquarters

Advanced Dicing Technologies Ltd.
 Hi-Tech Park (South), P.O.Box 87
 Yokneam 206992, Israel
 Tel: 972-4-8545222
 Fax: 972-4-8550007
 Email: sales@adt-co.com
www.adt-dicing.com

USA Subsidiary

Advanced Dicing Technologies Inc.
 1155 Business Center Drive, Horsham,
 PA 19044 U.S.A
 Toll free: 800-604-4950
 Tel: 215-773-9155
 Fax: 215-773-9844
 Email: us-support@adt-co.com

China Office

1st. floor, Building 19, No. 600
 Minsheng Road, PuDong
 Shanghai 200135, China
 Tel: 86-21-5093-9293
 Fax: 86-21-5093-9890
 Email: china_support@adt-co.com