

PVF BKIT 1

LOAD RESISTORS FOR EFT/BURST VERIFICATION



FOR TESTS ACCORDING TO ...

- > EN 61000-4-4
- > IEC 61000-4-4
- > ISO 7637-1:1990
- > ISO 7637-2:1990
- > ISO 7637-2:2004
- > ISO 7637-2:2011
- > ISO 7637-3:1995
- > ISO 7637-3:2007

CALIBRATION SET FOR EFT/BURST GENERATORS







The pulse shape of EFT/burst generators designed as per IEC 61000-4-4 have to be verified both into a 50 ohm and a 1,000 ohm load at the 50ohm coaxial HV output as well into 50 ohm load at the output of the coupling network where the DUT is connected when testing mains supply lines.

The PVF BKIT 1 includes the load resistors and a set of adapter to connect the coaxial matching resistors appropriately to the DUT output port.

HIGHLIGHTS

- > Calibration kit as per IEC 61000-4-4
- > Also used as per ISO 7637, Annex D
- > 50 ohm load resistor included
- > 1,000 ohm load resistor included
- > Adapters provided to adapt the load resistors to the output of the coupling network for easy measurement

APPLICATION AREAS

-  AUTOMOTIVE
-  RESIDENTIAL
-  INDUSTRY
-  MEDICAL
-  BROADCAST
-  TELECOM

TECHNICAL DETAILS

PVF 50

MEASURING EXAMPLE USING THE PVF 50


Open circuit voltage setting at the EFT/burst generator (50 ohm output): 2,000 V

Resulting output voltage across the 50 ohm matching resistor: 1,000 V.

Measuring voltage V_m : 10 V

Measured voltage considering the 50 ohm input impedance of the oscilloscope: 5 V

Resulting attenuation (theoretical): 400:1

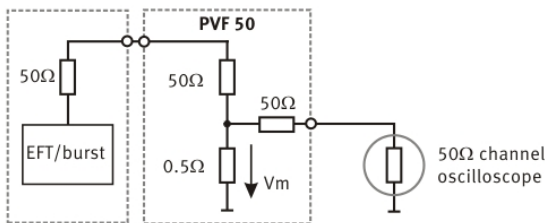

PVF 1000

MEASURING EXAMPLE USING THE PVF 1000


Open circuit voltage setting at the EFT generator (50ohm output): 2,000 V

Resulting output voltage across the 1,000 ohm matching resistor: 1,905 V

Measuring voltage V_m : 4 V

Measured voltage considering the 50 ohm input impedance of the oscilloscope: 2 V

Resulting attenuation (theoretical): 1,000:1

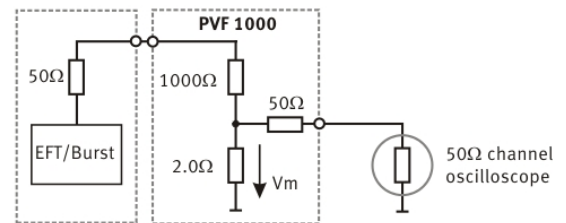

TECHNICAL DETAILS

PVF 50, 50 OHM LOAD RESISTOR

TECHNICAL DATA FOR PVF 50

Input Voltage	Max. 8,000 V
Input impedance	50 ohm +/-2%
Output impedance	50 ohm
Divider ratio	100:1
Dimension	155 mm x 26 mm x 26 mm
Weight	Approx. 150 g
	The divider ratio in a 50 ohm systems is n = 400

PVF 1000, 1 KOHM LOAD RESISTOR

TECHNICAL DATA FOR PVF 1000

Input Voltage	Max. 8,000 V
Input impedance	1,000 ohm +/-2%, <6 pF
Output impedance	50 ohm
Divider ratio	500:1
Dimension	155 mm x 26 mm x 26 mm
Weight	Approx. 150 g
	The divider ratio in a 50 ohm systems is n = 1,000

PVF AD 1 ADAPTER

TECHNICAL DATA FOR PVF AD 1

Function	Adapter 4 mm/6 mm to coaxial SHV connector, (to match the coupling network to the load resistor)
CDN connection	exchangeable banana plug, for 4 mm or 6 mm plug
Earth connection	4 mm banana, connection to earth plug on front panel
Dimension	78 mm x 45 mm x 26 mm
weight	approx. 65 g

GENERAL DATA

ENVIRONMENT

Temperature	10° C to 40° C
Rel. humidity	Max. 85 %, non condensing
Atmospheric pressure	86 kPa (860 mbar) to 106 kPa (1,060 mbar)

OPTIONS


CAPACITIVE COUPLING CLAMP

CCI	Capacitive coupling clamp, testing for signal- and datalines, IEC 61000-4-4, IEC 61000-4-18
-----	---

CCI PVKIT 1 (KIT FOR CCI CALIBRATION)

Transducer plate	Insulated copper poil with 4 mm connection plug, Insulation: 1,100 mm x 130 mm, Copper foil: 1,050 mm x 120 mm
Acrylblock (support)	Support for measuring adapter PVF 50 on 100 mm level for capacitive coupling clamp verification
PVF AD3	Adapter 4 mm to coaxial SHF connector, (connection Load resistor to transducer plate)

COMPETENCE WHEREVER YOU ARE

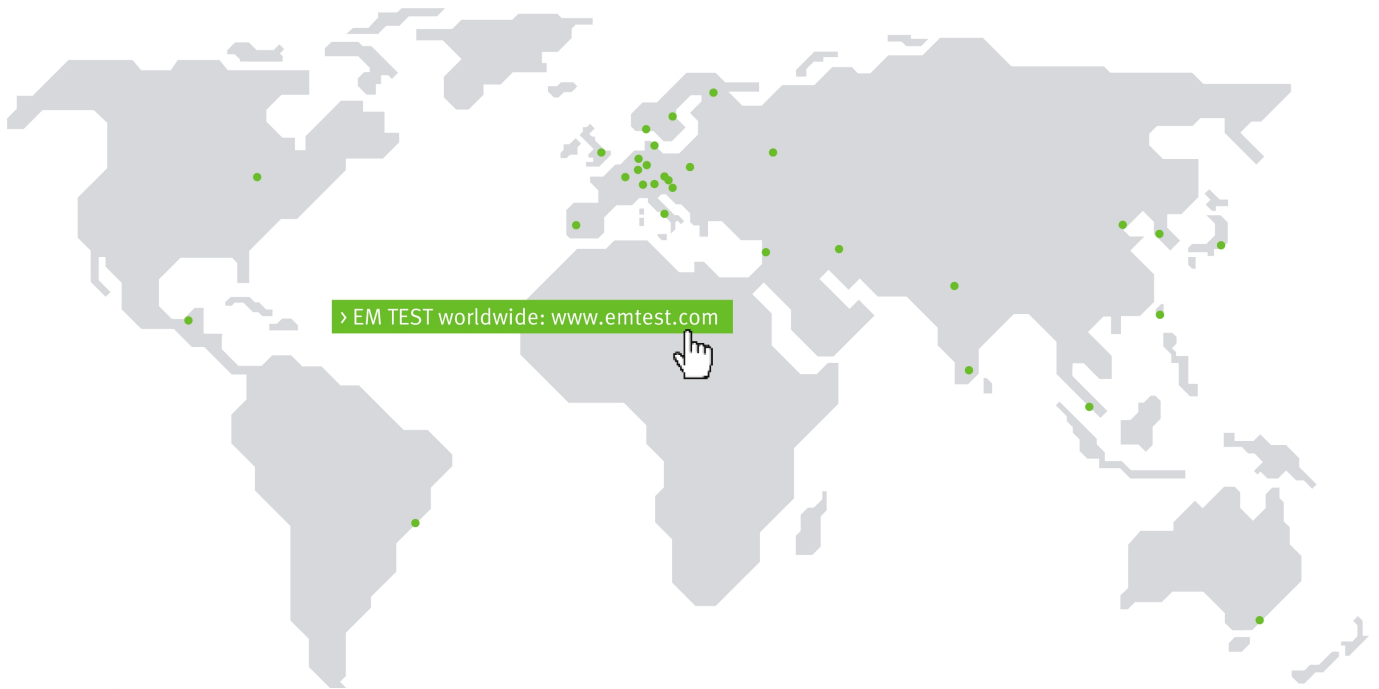

CONTACT EM TEST DIRECTLY

Switzerland

AMETEK CTS GmbH > Sternenhofstraße 15 > 4153 Reinach > Switzerland
Phone +41 (0)61 204 41 11 > Fax +41 (0)61 204 41 00
Internet: www.ametek-cts.com > E-mail: sales.conducted.cts@ametek.com

Germany

AMETEK CTS Europe GmbH > Customer Care Center EMEA > Lünener Straße 211
> 59174 Kamen > Germany
Phone +49 (0) 2307 26070-0 > Fax +49 (0) 2307 17050
Internet: www.ametek-cts.com > E-mail: info.cts.de@ametek.com

Poland

AMETEK CTS Europe GmbH > Biuro w Polsce > ul. Twarda 44 > 00-831 Warsaw > Poland
Phone +48 (0) 518 643 12
Internet: www.ametek-cts.com > E-mail: Infopolska.cts@ametek.com

USA / Canada

AMETEK CTS US > 52 Mayfield Ave > Edison > NJ 08837 > USA
Phone +1 732 417 0501
Internet: www.ametek-cts.com > E-mail: usasales.cts@ametek.com

P.R. China

AMETEK Commercial Enterprise (Shanghai) Co. Ltd.> Beijing Branch> Western Section, 2nd floor> Jing Dong Fang Building (B10)> Chaoyang District>Beijing, China, 100015
Phone +86 10 8526 2111 > Fax +86 (0)10 82 67 62 38
Internet: www.ametek-cts.com > E-mail: chinasales@ametek.com

Republic of Korea

EM TEST Korea Limited > #405 > WooYeon Plaza > #986-8 > YoungDeok-dong > Giheung-gu > Yongin-si > Gyeonggi-do > Korea
Phone +82 (31) 216 8616 > Fax +82 (31) 216 8616
Internet: www.emtest.co.kr > E-mail: sales@emtest.co.kr

Singapore

AMETEK Singapore Pte. Ltd > No. 43 Changi South Avenue 2 > 04-01 Singapore 48164
Internet: www.ametek-cts.com > E-mail: singaporesales.cts@ametek.com

Great Britain

AMETEK GB > 5 Ashville Way > Molly Millars Lane > Wokingham > Berkshire RG41 2 PL > Great Britain
Phone +44 845 074 0660
Internet: www.ametek-cts.com

Information about scope of delivery, visual design and technical data correspond with the state of development at time of release. Subject to change without further notice.