

N9048B PXE EMI Receiver

1 Hz to 44 GHz

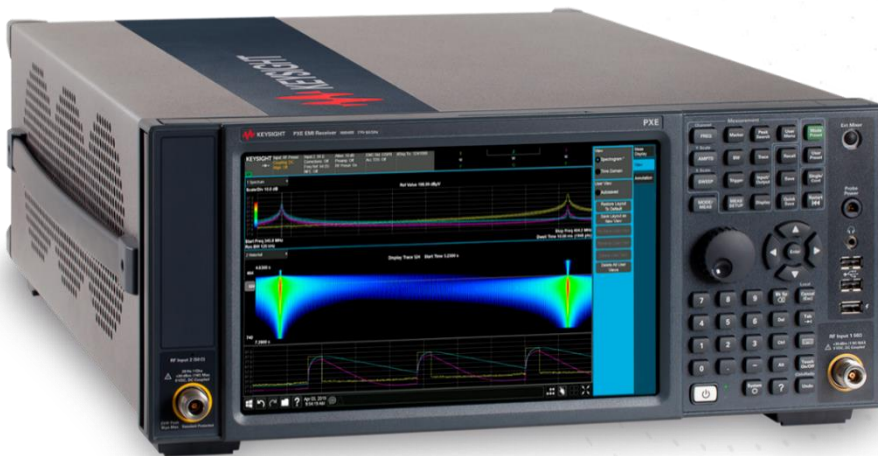


Table of Contents

| | |
|---|----|
| Definition and Terms | 3 |
| Frequency and Time Specifications | 4 |
| Amplitude Accuracy and Range Specifications | 7 |
| Dynamic Range Specifications | 16 |
| PowerSuite Measurement Specifications | 29 |
| General Specifications | 30 |
| Inputs and Outputs | 32 |
| IQ Analyzer | 34 |
| Time Domain Scan (TDS) | 36 |
| Related Literature | 37 |

Definition and Terms

Specifications describe the performance of parameters covered by the product warranty and apply to the full temperature range of 0 to 55 °C, unless otherwise noted.

95th percentile values indicate the breadth of the population (approx. 2σ) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

Typical values describe additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values indicate expected performance or describe product performance that is useful in the application of the product, but are not covered by the product warranty.

The receiver will meet its specifications when:

- It is within its calibration cycle
- Under auto couple control, except when Auto Sweep Time Rules = Accy.
- Signal frequencies < 10 MHz, with DC coupling applied
- The receiver has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on
- The receiver has been turned on at least 30 minutes with Auto Align set to normal, or, if Auto Align is set to off or partial, alignments must have been run recently enough to prevent an Alert message; if the Alert condition is changed from “Time and Temperature” to one of the disabled duration choices, the receiver may fail to meet specifications without informing the user

This data sheet is a summary of the specifications and conditions for the PXE EMI receiver. For the complete specifications guide, visit: www.keysight.com/find/PXE



Keep the test queue flowing

In EMC testing, success depends on tools that can help you do more in less time—today and tomorrow. That's why Keysight Technologies, Inc. created the PXE: it's a standards-compliant EMI receiver and diagnostic signal analyzer built on an upgradeable platform. In the lab and on the bench, it provides the accuracy, repeatability, and reliability you need to test with confidence. Equip your team with the PXE and keep the test queue flowing.



Frequency and Time Specifications

| Frequency range | | DC coupled | AC coupled |
|--|--|-------------------------------|--------------------|
| Input 1 | | | |
| Option 503 | | 1 Hz to 3.6 GHz | 10 MHz to 3.6 GHz |
| Option 508 | | 1 Hz to 8.4 GHz | 10 MHz to 8.4 GHz |
| Option 526 | | 1 Hz to 26.5 GHz | 10 MHz to 26.5 GHz |
| Option 544 | | 1 Hz to 44 GHz | 10 MHz to 44 GHz |
| Input 2 | | 1 Hz to 1 GHz | 10 MHz to 1 GHz |
| Band | LO Multiple (N) | | |
| 0 | 1 | 1 Hz to 3.6 GHz | |
| 1 | 1 | 3.5 to 8.4 GHz | |
| 2 | 2 | 8.3 to 13.6 GHz | |
| 3 | 2 | 13.5 to 17.1 GHz | |
| 4 | 4 | 17.0 to 26.5 GHz | |
| 5 | 4 | 26.4 to 34.5 GHz | |
| 6 | 8 | 34.4 to 44 GHz | |
| Frequency reference | Standard | With option PFR | |
| Accuracy | ± [(time since last adjustment × aging rate) + temperature stability + calibration accuracy] | | |
| Aging rate | ± 1 × 10 ⁻⁶ / year | ± 1 × 10 ⁻⁷ / year | |
| Temperature stability | | | |
| 20 to 30 °C | ± 2 × 10 ⁻⁶ | ± 1.5 × 10 ⁻⁸ | |
| Full temperature range | ± 2 × 10 ⁻⁶ | ± 5 × 10 ⁻⁸ | |
| Achievable initial calibration accuracy | ± 1.4 × 10 ⁻⁶ | ± 4 × 10 ⁻⁸ | |
| Residual FM | ≤ (0.25 Hz × N) _{p-p} in 20 ms (nominal). N is the LO multiplication factor | | |
| Frequency readout accuracy (start, stop, center, marker) | | | |
| ± (marker frequency × frequency reference accuracy + 0.25 % × span + 5 % × RBW + 2 Hz + 0.5 × horizontal resolution ¹) | | | |
| Marker frequency counter | | | |
| Accuracy | ± (marker frequency × frequency reference accuracy + 0.100 Hz) | | |
| Delta counter accuracy | ± (delta frequency × frequency reference accuracy + 0.141 Hz) | | |
| Counter resolution | 0.001 Hz | | |

1. Horizontal resolution is span/(sweep points - 1).

| Frequency span (FFT and swept mode) | | |
|--|---|-------------------------------|
| Range | 0 Hz (zero span), 10 Hz to maximum frequency of instrument | |
| Resolution | 2 Hz | |
| Accuracy | | |
| Stepped/Swept | $\pm (0.25 \% \times \text{span} + \text{horizontal resolution})$ | |
| FFT | $\pm (0.1\% \times \text{span} + \text{horizontal resolution})$ | |
| Sweep time and triggering | | |
| Range | Span = 0 Hz | 1 μ s to 6000 s |
| | Span \geq 10 Hz | 1 ms to 4000 s |
| Accuracy | Span \geq 10 Hz, swept | $\pm 0.01 \% \text{ nominal}$ |
| | Span \geq 10 Hz, FFT | $\pm 40 \% \text{ nominal}$ |
| | Span = 0 Hz | $\pm 0.01 \% \text{ nominal}$ |
| Trigger | Free run, Line, Video, External 1, External 2, RF Burst, Periodic timer | |
| Trigger delay | Span = 0 or FFT | -150 to +500 ms |
| | Span \geq 10 Hz, swept | 0 to 500 ms |
| | Resolution | 0.1 μ s |
| Gated Sweep | | |
| Gate methods | Gated LO; gated video; gated FFT | |
| Gate length range | 1 μ s to 5.0 s (Except method = FFT) | |
| Gate delay range | 0 to 100.0 s | |
| Gate delay jitter | 33.3 ns p-p, nominal | |
| Sweep/Step (trace) point range | | |
| Analyzer mode | 1 to 100,001 | |
| Receiver mode | 1 to 4,000,001 | |
| Resolution bandwidth (RBW) | | |
| EMI bandwidths (CISPR compliant) | 200 Hz, 9 kHz, 120 kHz, 1 MHz | |
| EMI bandwidths (Mil-STD-461 compliant) | 10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz | |
| Other bandwidths (-6 dB) | 1 Hz (requires Option WF1) | |
| | 30 Hz, 300 Hz, 3 kHz, 30 kHz, 300 kHz, 3 MHz, 10 MHz | |
| Range (-3 dB bandwidth) | 1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz | |

| | | |
|--|--|----------------------------------|
| Bandwidth accuracy (power) | | |
| 1 Hz to 750 kHz | | ± 1.0 % (± 0.044 dB) |
| 820 kHz to 1.2 MHz (< 3.6 GHz CF) | | ± 2.0 % (± 0.088 dB) |
| 1.3 to 2 MHz (< 3.6 GHz CF) | | ± 0.07 dB nominal |
| 2.2 to 3 MHz (< 3.6 GHz CF) | | ± 0.15 dB nominal |
| 4 to 8 MHz (< 3.6 GHz CF) | | ± 0.25 dB nominal |
| Bandwidth accuracy (−3 dB) | 1 Hz to 1.3 MHz | ± 2% nominal |
| Selectivity (−60 dB/−3 dB) | | 4.1: 1 nominal |
| Video bandwidth (VBW) | | |
| Range | 1 Hz to 3 MHz (10 % steps), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz) | |
| Accuracy | ± 6 % (nominal) | |
| Analysis bandwidth ¹ | | |
| Maximum bandwidth | Option B40 | 40 MHz |
| | Option B25 | 25 MHz |
| | Standard | 10 MHz |
| Real time scan bandwidth | | |
| Option N9048WT1B | 170 MHz | |
| Option N9048WT2B | 350 MHz | |
| RF preselector filters | | |
| Filter band | Filter type | 6 dB Bandwidth (nominal) |
| 150 kHz | Fixed lowpass | 289 kHz (−3 dB corner frequency) |
| 150 kHz to 30 MHz | Fixed bandpass | 36 MHz |
| 30 to 52 MHz | Fixed bandpass | 28 MHz |
| 52 to 75 MHz | Fixed bandpass | 39 MHz |
| 75 to 120 MHz | Fixed bandpass | 63 MHz |
| 120 to 165 MHz | Fixed bandpass | 71 MHz |
| 165 to 210 MHz | Fixed bandpass | 69 MHz |
| 210 to 255 MHz | Fixed bandpass | 71 MHz |
| 255 to 300 MHz | Fixed bandpass | 68 MHz |
| 300 to 475 MHz | Fixed bandpass | 284 MHz |

1. Analysis bandwidth is the instantaneous bandwidth available around a center frequency over which the input signal can be digitized for further analysis or processing in the time, frequency, or modulation domain.

| 475 to 650 MHz | Fixed bandpass | 305 MHz |
|--------------------|----------------|-----------------------------------|
| 650 to 825 MHz | Fixed bandpass | 302 MHz |
| 825 to 1000 MHz | Fixed bandpass | 314 MHz |
| 1 GHz | Fixed highpass | 912 MHz (-3 dB corner frequency) |
| 1.7 GHz | Fixed highpass | 1.56 GHz (-3 dB corner frequency) |
| 2.9 GHz | Fixed highpass | 2.29 GHz (-3 dB corner frequency) |
| Notch filters | | |
| Reject band | 2.4 to 2.5 GHz | |
| Reject attenuation | 20 dB nominal | |

Amplitude Accuracy and Range Specifications

| Amplitude range | | |
|--------------------------|---|-----------------|
| Measurement range | Displayed average noise level (DANL) to +30 dBm | |
| Input attenuator range | 0 to 70 dB in 2 dB steps | |
| Maximum safe input level | | |
| | RF input 1 | RF input 2 |
| Average total power | +30 dBm (1 W) | +30 dBm (1 W) |
| Peak pulse power | +50 dBm (100 W) | +50 dBm (100 W) |
| Surge power | +2 kW (10 μ s pulse width) | |
| DC volts | | |
| DC coupled | ± 0.2 Vdc | ± 0.2 Vdc |
| AC coupled | ± 100 Vdc | ± 100 Vdc |
| Display range | | |
| Log scale | 0.1 to 1 dB/division in 0.1 dB steps | |
| | 1 to 20 dB/division in 1 dB steps (10 display divisions) | |
| Linear scale | 10 divisions | |
| Scale units | dBm, dBmV, dB μ V, dBmA, dB μ A, V, W, A, dBuV/m, dBuA/m, dBpT, dBG, dBpW | |

| Frequency response | | | |
|---|-------------------|---------------|-----------------|
| Maximum error relative to reference condition (50 MHz), Mechanical attenuator only, Non-FFT operation only, 20 to 30 °C | | | |
| | | Specification | 95th percentile |
| RF/MW (Option 503/508/526) | | | |
| RF Preselector Off, Preamp Off (10 dB attenuation) | 1 Hz to 9 kHz | ± 0.45 dB | ± 0.16 dB |
| | 9 kHz to 10 MHz | ± 0.45 dB | ± 0.25 dB |
| | 10 MHz to 1.0 GHz | ± 0.40 dB | ± 0.25 dB |
| | 1.0 to 3.6 GHz | ± 0.60 dB | ± 0.25 dB |
| | 3.5 to 13.6 GHz | ± 1.00 dB | ± 0.50 dB |
| | 13.5 to 16 GHz | ± 1.10 dB | ± 0.90 dB |
| | 16 to 17.1 GHz | ± 1.40 dB | ± 1.03 dB |
| | 17.0 to 22.0 GHz | ± 1.20 dB | ± 0.55 dB |
| | 22.0 to 26.5 GHz | ± 1.40 dB | ± 0.60 dB |
| RF Preselector On, Preamp off (10 dB attenuation) | 1 Hz to 9 kHz | ± 0.50 dB | ± 0.20 dB |
| | 9 kHz to 10 MHz | ± 0.60 dB | ± 0.25 dB |
| | 10 MHz to 1.0 GHz | ± 0.50 dB | ± 0.23 dB |
| | 1.0 to 3.6 GHz | ± 0.60 dB | ± 0.25 dB |
| | 3.5 to 13.6 GHz | ± 1.00 dB | ± 0.50 dB |
| | 13.5 to 16 GHz | ± 1.10 dB | ± 0.90 dB |
| | 16 to 17.1 GHz | ± 1.40 dB | ± 1.03 dB |
| | 17.0 to 22.0 GHz | ± 1.20 dB | ± 0.55 dB |
| | 22.0 to 26.5 GHz | ± 1.40 dB | ± 0.60 dB |
| RF Preselector Off, Preamp On, LNA Off (0 dB attenuation) | 100 kHz to 10 MHz | ± 0.70 dB | ± 0.36 dB |
| | 10 MHz to 1.0 GHz | ± 0.60 dB | ± 0.25 dB |
| | 1.0 to 3.6 GHz | ± 0.70 dB | ± 0.30 dB |
| | 3.5 to 13.6 GHz | ± 1.50 dB | ± 0.75 dB |
| | 13.5 to 16 GHz | ± 1.50 dB | ± 1.02 dB |
| | 16 to 17.1 GHz | ± 1.50 dB | ± 1.21 dB |
| | 17.0 to 22.0 GHz | ± 1.80 dB | ± 0.95 dB |
| | 22.0 to 26.5 GHz | ± 2.00 dB | ± 0.95 dB |
| RF Preselector On, Preamp On, LNA Off (0 dB attenuation) | 1 to 9 kHz | ± 0.50 dB | ± 0.20 dB |
| | 9 kHz to 10 MHz | ± 0.80 dB | ± 0.31 dB |
| | 10 to 30 MHz | ± 0.80 dB | ± 0.32 dB |
| | 30 MHz to 1.0 GHz | ± 0.50 dB | ± 0.23 dB |
| | 1.0 to 3.6 GHz | ± 0.60 dB | ± 0.23 dB |
| | 3.5 to 13.6 GHz | ± 1.50 dB | ± 0.75 dB |
| | 13.5 to 16 GHz | ± 1.50 dB | ± 1.02 dB |
| | 16 to 17.1 GHz | ± 1.50 dB | ± 1.21 dB |
| | 17.0 to 22.0 GHz | ± 1.80 dB | ± 0.95 dB |
| | 22.0 to 26.5 GHz | ± 2.00 dB | ± 0.95 dB |

| Frequency response | | | |
|---|-------------------|-----------|-----------|
| RF Preselector Off, Preamp Off or On, LNA On (0 dB attenuation) | 30 MHz to 1.0 GHz | ± 0.50 dB | ± 0.25 dB |
| | 1.0 to 3.6 GHz | ± 0.60 dB | ± 0.30 dB |
| RF Preselector On, Preamp Off or On, LNA On (0 dB attenuation) | 10 to 30 MHz | | ± 0.35 dB |
| | 30 MHz to 1.0 GHz | ± 0.50 dB | ± 0.22 dB |
| | 1.0 to 3.6 GHz | ± 0.60 dB | ± 0.27 dB |
| RF Preselector On or Off, Preamp Off, LNA On (0 dB attenuation) | 3.5 to 8.4 GHz | ± 1.60 dB | ± 0.75 dB |
| | 8.3 to 13.6 GHz | ± 1.60 dB | ± 0.85 dB |
| | 13.5 to 16 GHz | ± 1.60 dB | ± 1.26 dB |
| | 16 to 17.1 GHz | ± 1.80 dB | ± 1.61 dB |
| | 17.0 to 26.5 GHz | ± 1.90 dB | ± 0.95 dB |
| RF Preselector On or Off, Preamp On, LNA On (0 dB attenuation) | 3.5 to 13.6 GHz | ± 1.60 dB | ± 0.75 dB |
| | 13.5 to 16 GHz | ± 1.60 dB | ± 1.02 dB |
| | 16 to 17.1 GHz | ± 1.60 dB | ± 1.28 dB |
| | 17.0 to 22.0 GHz | ± 1.80 dB | ± 0.95 dB |
| | 22.0 to 26.5 GHz | ± 2.00 dB | ± 0.95 dB |
| Millimeter-Wave (Option 544) | | | |
| RF Preselector Off, Preamp Off (10 dB attenuation) | 1 Hz to 9 kHz | ± 0.45 dB | ± 0.16 dB |
| | 9 kHz to 10 MHz | ± 0.45 dB | ± 0.25 dB |
| | 10 MHz to 1.0 GHz | ± 0.40 dB | ± 0.25 dB |
| | 1.0 to 3.6 GHz | ± 0.60 dB | ± 0.25 dB |
| | 3.5 to 5.2 GHz | ± 1.50 dB | ± 0.60 dB |
| | 5.2 to 17.1 GHz | ± 1.00 dB | ± 0.45 dB |
| | 17.0 to 26.5 GHz | ± 1.20 dB | ± 0.55 dB |
| | 26.4 to 34.5 GHz | ± 1.80 dB | ± 0.70 dB |
| | 34.4 to 40.0 GHz | ± 2.30 dB | ± 1.10 dB |
| 40.0 to 44.0 GHz | ± 2.60 dB | ± 1.30 dB | |
| RF Preselector On, Preamp Off (10 dB attenuation) | 1 Hz to 9 kHz | ± 0.50 dB | ± 0.20 dB |
| | 9 kHz to 10 MHz | ± 0.60 dB | ± 0.25 dB |
| | 10 MHz to 1.0 GHz | ± 0.50 dB | ± 0.23 dB |
| | 1.0 to 3.6 GHz | ± 0.60 dB | ± 0.25 dB |
| | 3.5 to 5.2 GHz | ± 1.50 dB | ± 0.60 dB |
| | 5.2 to 17.1 GHz | ± 1.00 dB | ± 0.45 dB |
| | 17.0 to 26.5 GHz | ± 1.20 dB | ± 0.55 dB |
| | 26.4 to 34.5 GHz | ± 1.80 dB | ± 0.70 dB |
| | 34.4 to 40.0 GHz | ± 2.30 dB | ± 1.10 dB |
| 40.0 to 44.0 GHz | ± 2.60 dB | ± 1.30 dB | |

| | | | |
|---|-------------------|-----------|-----------|
| RF Preselector Off, Preamp On, LNA Off (0 dB attenuation) | 100 kHz to 10 MHz | ± 0.70 dB | ± 0.36 dB |
| | 10 MHz to 1.0 GHz | ± 0.60 dB | ± 0.25 dB |
| | 1.0 to 3.6 GHz | ± 0.70 dB | ± 0.30 dB |
| | 3.5 to 5.2 GHz | ± 1.70 dB | ± 0.65 dB |
| | 5.2 to 17.1 GHz | ± 1.20 dB | ± 0.50 dB |
| | 17.0 to 26.5 GHz | ± 1.40 dB | ± 0.50 dB |
| | 26.4 to 34.5 GHz | ± 2.00 dB | ± 0.70 dB |
| | 34.4 to 40.0 GHz | ± 2.50 dB | ± 1.10 dB |
| | 40.0 to 44.0 GHz | ± 2.80 dB | ± 1.30 dB |
| RF Preselector On, Preamp On, LNA Off (0 dB attenuation) | 1 to 9 kHz | ± 0.50 dB | ± 0.20 dB |
| | 9 kHz to 10 MHz | ± 0.80 dB | ± 0.31 dB |
| | 10 to 30 MHz | ± 0.80 dB | ± 0.32 dB |
| | 30 MHz to 1.0 GHz | ± 0.50 dB | ± 0.23 dB |
| | 1.0 to 3.6 GHz | ± 0.60 dB | ± 0.23 dB |
| | 3.5 to 5.2 GHz | ± 1.70 dB | ± 0.65 dB |
| | 5.2 to 17.1 GHz | ± 1.20 dB | ± 0.50 dB |
| | 17.0 to 26.5 GHz | ± 1.40 dB | ± 0.50 dB |
| | 26.4 to 34.5 GHz | ± 2.00 dB | ± 0.70 dB |
| | 34.4 to 40.0 GHz | ± 2.50 dB | ± 1.10 dB |
| RF Preselector Off, Preamp Off or On, LNA On (0 dB attenuation) | 30 MHz to 1.0 GHz | ± 0.50 dB | ± 0.25 dB |
| | 1.0 to 3.6 GHz | ± 0.60 dB | ± 0.30 dB |
| RF Preselector On, Preamp Off or On, LNA On (0 dB attenuation) | 10 to 30 MHz | | ± 0.35 dB |
| | 30 MHz to 1.0 GHz | ± 0.50 dB | ± 0.22 dB |
| | 1.0 to 3.6 GHz | ± 0.60 dB | ± 0.27 dB |
| RF Preselector On or Off, Preamp Off, LNA On (0 dB attenuation) | 3.5 to 5.2 GHz | ± 1.70 dB | ± 0.65 dB |
| | 5.2 to 17.1 GHz | ± 1.30 dB | ± 0.50 dB |
| | 17.0 to 26.5 GHz | ± 1.50 dB | ± 0.55 dB |
| | 26.4 to 34.5 GHz | ± 2.00 dB | ± 0.70 dB |
| | 34.4 to 40.0 GHz | ± 2.50 dB | ± 1.10 dB |
| | 40.0 to 44.0 GHz | ± 2.90 dB | ± 1.30 dB |
| RF Preselector On or Off, Preamp On, LNA On (0 dB attenuation) | 3.5 to 5.2 GHz | ± 1.70 dB | ± 0.65 dB |
| | 5.2 to 17.1 GHz | ± 1.30 dB | ± 0.50 dB |
| | 17.0 to 26.5 GHz | ± 1.50 dB | ± 0.55 dB |
| | 26.4 to 34.5 GHz | ± 2.00 dB | ± 0.70 dB |
| | 34.4 to 40.0 GHz | ± 2.60 dB | ± 1.20 dB |
| | 40.0 to 44.0 GHz | ± 3.00 dB | ± 1.30 dB |

| Input attenuation switching uncertainty | | | |
|--|---------------------------------|----------------------------------|----------------------|
| | | Specification | 95th percentile |
| Attenuation > 2 dB, preamp off | 50 MHz (reference frequency) | ± 0.20 dB | ± 0.08 dB typical |
| Relative to 10 dB | | | |
| Absolute amplitude accuracy | | | |
| 10 dB attenuation, 20 to 30°C, 1 Hz ≤ RBW ≤ 1 MHz, input signal -10 to -50 dBm, RF Preselector Off, Preamp Off and On, all settings auto-coupled except Auto Swp Time = Accy, any reference level, any scale, σ = nominal standard deviation) | | | |
| | | Specification | 95th percentile |
| RF input 1 | At 50 MHz | ± 0.30 dB | ± 0.17 dB |
| | At all frequencies | ± (0.30 dB + frequency response) | |
| RF input 2 | At 50 MHz | ± 0.35 dB | ± 0.21 dB |
| | At all frequencies | ± (0.35 dB + frequency response) | |
| Input voltage standing wave ratio (VSWR) ¹ | | | |
| | | Input atten = 0 dB | Input atten ≥ 10 dB |
| RF Preselector Off, Preamp Off | | | |
| DC coupled | 1 to 18 GHz | 3.0:1 | 2.0:1, 1.8:1 typical |
| | 18 to 26.5 GHz | 3.0:1 | 2.0:1, 1.8:1 typical |
| | 26.5 to 40.0 GHz | 3.0:1 | 2.5:1, 1.8:1 typical |
| | 40.0 to 44.0 GHz | 2.0:1 typical | |
| AC coupled | 1 to 18 GHz | 3.0:1 | 2.0:1, 1.8:1 typical |
| | 18 to 26.5 GHz | 3.0:1 | 2.4:1, 2.0:1 typical |
| RF Preselector On, Preamp Off | | | |
| DC coupled | 9 kHz to 1 GHz | 2.0:1 | 1.2:1, 1.1:1 typical |
| | 1 to 3.6 GHz | 3.0:1 | 2.0:1, 1.5:1 typical |
| | 3.6 to 26.5 GHz | 3.0:1 | 2.0:1, 1.8:1 typical |
| | 26.5 to 40.0 GHz | 3.0:1 | 2.5:1, 1.8:1 typical |
| | 40.0 to 44.0 GHz | 2.0:1 typical | |
| AC coupled | 55 MHz to 1 GHz | 2.0:1 | 1.2:1 |
| | 1 to 18 GHz | 3.0:1 | 2.0:1, 1.8:1 typical |
| | 18 to 26.5 GHz | 3.0:1 | 2.4:1, 2.0:1 typical |

1. When the notch filter is selected, the specs between 2.3 – 2.6 GHz is not applicable.

| RF Preselector Off, Preamp On or Off, LNA On or Off | | | |
|---|----------------------------------|-------|----------------------|
| DC coupled | 1 to 18 GHz | 3.0:1 | 2.0:1, 1.8:1 typical |
| | 18 to 26.5 GHz | 3.0:1 | 2.0:1, 1.8:1 typical |
| | 26.5 to 40.0 GHz | 3.0:1 | 2.5:1, 1.8:1 typical |
| | 40.0 to 44.0 GHz | | 2.0:1 typical |
| AC coupled | 1 to 18 GHz | 3.0:1 | 2.0:1, 1.8:1 typical |
| | 18 to 26.5 GHz | 3.0:1 | 2.4:1, 2.0:1 typical |
| RF Preselector On, Preamp On or Off, LNA On or Off | | | |
| DC coupled | 50 MHz to 1 GHz | 2.0:1 | 1.2:1, 1.1:1 typical |
| | 1 to 3.6 GHz | 3.0:1 | 2.0:1, 1.5:1 typical |
| | 3.6 to 26.5 GHz | 3.0:1 | 2.0:1, 1.8:1 typical |
| | 26.5 to 40.0 GHz | 3.0:1 | 2.5:1, 1.8:1 typical |
| | 40.0 to 44.0 GHz | | 2.0:1 typical |
| AC coupled | 55 MHz to 1 GHz | 2.0:1 | 1.2:1 |
| | 1 to 18 GHz | 3.0:1 | 2.0:1, 1.8:1 typical |
| | 18 to 26.5 GHz | 3.0:1 | 2.4:1, 2.0:1 typical |
| RBW switching uncertainty (reference to 30 kHz RBW) | | | |
| 1 Hz to 1.5 MHz RBW | ± 0.05 dB | | |
| 1.6 to 3 MHz RBW | ± 0.10 dB | | |
| 4, 5, 6, 8 MHz RBW | ± 1.0 dB | | |
| Reference level | | | |
| Range | | | |
| Log scale | -170 to +30 dBm in 0.01 dB steps | | |
| Linear scale | Same as log (707 pV to 7.07 V) | | |
| Accuracy | 0 dB | | |
| Display scale switching uncertainty | | | |
| Switching between linear and log | 0 dB | | |
| Log scale/div switching | 0 dB | | |
| Display scale fidelity | | | |
| Between -10 dBm and -80 dBm input mixer level | ± 0.10 dB | | |

| Total measurement uncertainty | | | |
|---|-------------------|--|-------------------|
| Signal level 0 to 90 dB below reference point, RF attenuation 0 to 40 dB, RBW \leq 1 MHz, 20 to 30 °C | | | |
| | | Spectrum analyzer mode (95th percentile) | EMI receiver mode |
| RF/MW (Option 503/508/526) | | | |
| RF Preselector Off, Preamp Off | 9 kHz to 10 MHz | ± 0.35 dB | ± 0.40 dB |
| | 10 MHz to 3.6 GHz | ± 0.25 dB | ± 0.30 dB |
| | 3.6 to 18.0 GHz | ± 0.50 dB | ± 0.65 dB |
| | 18.0 to 26.5 GHz | ± 0.80 dB | ± 0.95 dB |
| RF Preselector On, Preamp Off | 9 kHz to 10 MHz | ± 0.31 dB | ± 0.44 dB |
| | 10 MHz to 3.6 GHz | ± 0.20 dB | ± 0.31 dB |
| | 3.6 to 18.0 GHz | ± 0.50 dB | ± 0.65 dB |
| | 18.0 to 26.5 GHz | ± 0.80 dB | ± 0.95 dB |
| RF Preselector Off, Preamp On, LNA Off | 100 kHz to 10 MHz | ± 0.40 dB | ± 0.45 dB |
| | 10 MHz to 3.6 GHz | ± 0.30 dB | ± 0.35 dB |
| | 3.6 to 18.0 GHz | ± 0.65 dB | ± 0.70 dB |
| | 18.0 to 26.5 GHz | ± 0.90 dB | ± 1.10 dB |
| RF Preselector On, Preamp On, LNA Off | 9 kHz to 10 MHz | ± 0.36 dB | ± 0.41 dB |
| | 10 MHz to 3.6 GHz | ± 0.20 dB | ± 0.34 dB |
| | 3.6 to 18.0 GHz | ± 0.65 dB | ± 0.70 dB |
| | 18.0 to 26.5 GHz | ± 0.90 dB | ± 1.10 dB |
| RF Preselector Off, Preamp On or Off, LNA On | 2 to 10 MHz | ± 0.45 dB | ± 0.50 dB |
| | 10 MHz to 3.6 GHz | ± 0.30 dB | ± 0.30 dB |
| RF Preselector On, Preamp On or Off, LNA On | 10 MHz to 3.6 GHz | ± 0.27 dB | ± 0.33 dB |
| RF Preselector Off or On, Preamp Off, LNA On | 3.6 to 18.0 GHz | ± 0.65 dB | ± 0.65 dB |
| | 18.0 to 26.5 GHz | ± 0.90 dB | ± 1.15 dB |
| RF Preselector Off or On, Preamp On, LNA On | 3.6 to 18.0 GHz | ± 0.65 dB | ± 0.70 dB |
| | 18.0 to 26.5 GHz | ± 0.90 dB | ± 1.20 dB |

| Millimeter-Wave (Option 544) | | | |
|--|-------------------|-----------|-----------|
| RF Preselector Off, Preamp Off | 9 kHz to 10 MHz | ± 0.35 dB | ± 0.40 dB |
| | 10 MHz to 1 GHz | ± 0.25 dB | ± 0.30 dB |
| | 1 to 3.6 GHz | ± 0.35 dB | ± 0.40 dB |
| | 3.6 to 18.0 GHz | ± 0.50 dB | ± 0.65 dB |
| | 18.0 to 26.5 GHz | ± 0.80 dB | ± 0.95 dB |
| | 26.5 to 44.0 GHz | ± 1.20 dB | ± 1.50 dB |
| RF Preselector On, Preamp Off | 9 kHz to 10 MHz | ± 0.31 dB | ± 0.44 dB |
| | 10 MHz to 3.6 GHz | ± 0.20 dB | ± 0.31 dB |
| | 3.6 to 18.0 GHz | ± 0.50 dB | ± 0.65 dB |
| | 18.0 to 26.5 GHz | ± 0.80 dB | ± 0.95 dB |
| | 26.5 to 44.0 GHz | ± 1.20 dB | ± 1.50 dB |
| RF Preselector Off, Preamp On, LNA Off | 100 kHz to 10 MHz | ± 0.40 dB | ± 0.45 dB |
| | 10 MHz to 1.0 GHz | ± 0.30 dB | ± 0.35 dB |
| | 1.0 to 3.6 GHz | ± 0.35 dB | ± 0.40 dB |
| | 3.6 to 18.0 GHz | ± 0.65 dB | ± 0.70 dB |
| | 18.0 to 26.5 GHz | ± 0.90 dB | ± 1.10 dB |
| | 26.5 to 44.0 GHz | ± 1.25 dB | ± 1.55 dB |
| RF Preselector On, Preamp On, LNA Off | 9 kHz to 10 MHz | ± 0.36 dB | ± 0.41 dB |
| | 10 MHz to 3.6 GHz | ± 0.25 dB | ± 0.34 dB |
| | 3.6 to 18.0 GHz | ± 0.65 dB | ± 0.70 dB |
| | 18.0 to 26.5 GHz | ± 0.90 dB | ± 1.10 dB |
| | 26.5 to 44.0 GHz | ± 1.25 dB | ± 1.55 dB |
| RF Preselector Off, Preamp On or Off, LNA On | 2 to 10 MHz | ± 0.45 dB | ± 0.50 dB |
| | 10 MHz to 1 GHz | ± 0.30 dB | ± 0.30 dB |
| | 1 to 3.6 GHz | ± 0.35 dB | ± 0.35 dB |
| RF Preselector On, Preamp On or Off, LNA On | 10 MHz to 3.6 GHz | ± 0.27 dB | ± 0.33 dB |
| RF Preselector Off or On, Preamp Off, LNA On | 3.6 to 18.0 GHz | ± 0.65 dB | ± 0.70 dB |
| | 18.0 to 26.5 GHz | ± 0.90 dB | ± 1.15 dB |
| | 26.5 to 44.0 GHz | ± 1.25 dB | ± 1.55 dB |
| RF Preselector Off or On, Preamp On, LNA On | 3.6 to 18.0 GHz | ± 0.65 dB | ± 0.70 dB |
| | 18.0 to 26.5 GHz | ± 0.90 dB | ± 1.20 dB |
| | 26.5 to 44.0 GHz | ± 1.25 dB | ± 1.55 dB |
| Trace detectors | | | |
| Normal, peak, sample, negative peak, log power average, RMS average, and voltage average | | | |
| CISPR detectors: quasi-peak, EMI-avg, RMS-avg | | | |

| Preamplifier Gain | | |
|---|---------------------|------------------|
| RF Preselector Off, Preamp On, LNA Off | 100 kHz to 3.6 GHz | +20 dB (nominal) |
| | 3.6 to 44 GHz | +28 dB (nominal) |
| RF Preselector On, Preamp On, LNA Off | 1 to 150 kHz | +20 dB (nominal) |
| | 150 kHz to 3.6 GHz | +15 dB (nominal) |
| RF Preselector On or Off, Preamp Off, LNA On | 150 kHz to 26.5 GHz | +20 dB (nominal) |
| | 26.5 to 44 GHz | +16 dB (nominal) |
| RF Preselector On or Off, Preamp On, LNA On | 150 kHz to 3.6 GHz | +20 dB (nominal) |
| | 3.6 to 26.5 GHz | +35 dB (nominal) |
| | 26.5 to 44 GHz | +36 dB (nominal) |
| Amplitude probability distribution | | |
| | Specifications | |
| Dynamic range | > 70 dB | |
| Amplitude accuracy | < ± 2.7 dB | |
| Maximum measurable time period | 2 minutes | |
| Minimum measurable probability | 10 ⁻⁷ | |
| Amplitude level assignment | 1000 levels | |
| Sampling rate (within a 1 MHz RBW) | ≥ 10 MSa/s | |
| Amplitude resolution | 0.1881 dB | |

Dynamic Range Specifications

| 1 dB gain compression (two-tone) | | |
|---|--------------------------------|-----------------|
| At 1 kHz RBW with 100 kHz tone spacing, Input 1, 20 to 30 °C RF Input 1 to 44 GHz (RF Input 2 to 1 GHz, performance = RF Input 1 performance + 9 dB) | | |
| RF Preselector Off or On, Preamp Off, LNA Off | 9 kHz to 40 MHz | +2 dBm nominal |
| | 40 MHz to 3.6 GHz | +5 dBm nominal |
| | 1 to 3.6 GHz | +5 dBm nominal |
| | 3.5 to 16 GHz | +7 dBm nominal |
| | 16 to 26.5 GHz | +6 dBm nominal |
| | 26.4 to 34.5 GHz | +4 dBm nominal |
| | 34.4 to 44 GHz | +0 dBm nominal |
| RF Preselector Off, Preamp On, LNA Off | 10 MHz to 3.6 GHz | -13 dBm nominal |
| | 3.5 to 26.5 GHz | |
| | Tone spacing 100 kHz to 20 MHz | -23 dBm nominal |
| | Tone spacing > 70 MHz | -16 dBm nominal |
| | 26.4 to 44 GHz | -30 dBm nominal |
| RF Preselector On, Preamp On, LNA Off | 9 to 150 kHz | -17 dBm nominal |
| | 150 kHz to 10 MHz | -11 dBm nominal |
| | 10 to 50 MHz | -13 dBm nominal |
| | 50 MHz to 3.6 GHz | -10 dBm nominal |
| | 3.5 to 26.5 GHz | |
| | Tone spacing 100 kHz to 20 MHz | -23 dBm nominal |
| | Tone spacing > 70 MHz | -16 dBm nominal |
| | 26.4 to 44 GHz | -30 dBm nominal |
| RF Preselector Off or On, Preamp Off, LNA On | 30 MHz to 3.6 GHz | -16 dBm nominal |
| | 3.5 to 26.5 GHz | |
| | Tone spacing 100 kHz to 20 MHz | -13 dBm nominal |
| | Tone spacing > 70 MHz | -7 dBm nominal |
| | 26.4 to 44 GHz | -18 dBm nominal |
| RF Preselector Off or On, Preamp On, LNA On | 30 MHz to 3.6 GHz | -16 dBm nominal |
| | 3.5 to 26.5 GHz | |
| | Tone spacing 100 kHz to 20 MHz | -30 dBm nominal |
| | Tone spacing > 70 MHz | -26 dBm nominal |
| | 26.4 to 44 GHz | -35 dBm nominal |

| Spurious response | | |
|--|---------------------------------------|-------------------------------------|
| RF Input 1; RF Preselector Off or On | | |
| Residual responses ¹ | 200 kHz to 8.4 GHz (swept) | -100 dBm |
| | Zero span or FFT or other frequencies | -100 dBm nominal |
| Images response | | |
| RF/MW (Option 503/508/526) | 10 MHz to 3.6 GHz | -80 dBc, -108 dBc typical |
| $f \pm 645$ MHz | 3.5 to 13.6 GHz | -81 dBc, -85 dBc typical |
| Mixer level -10 dBm | 13.5 to 17.1 GHz | -81 dBc, -86 dBc typical |
| | 17.0 to 22 GHz | -76 dBc, -81 dBc typical |
| | 22 to 26.5 GHz | -69 dBc, -76 dBc typical |
| Millimeter-Wave (Option 544) | 10 MHz to 3.6 GHz | -80 dBc, -108 dBc typical |
| $f \pm 645$ MHz | 3.5 to 13.6 GHz | -80 dBc, -102 dBc typical |
| Mixer level -10 dBm | 13.5 to 17.1 GHz | -80 dBc, -102 dBc typical |
| | 17.0 to 22 GHz | -80 dBc, -100 dBc typical |
| | 22 to 26.5 GHz | -70 dBc, -97 dBc typical |
| Mixer level -30 dBm | 26.5 to 34.5 GHz | -70 dBc, -94 dBc typical |
| | 34.4 to 44 GHz | -59 dBc, -79 dBc typical |
| LO related spurious ($f > 600$ MHz from carrier) | 10 MHz to 3.6 GHz | -90 dBc + $20\text{Log}N^2$ typical |
| Other spurious ($f \geq 10$ MHz from carrier) | Carrier frequency ≤ 26.5 GHz | -80 dBc + $20\text{Log}N^2$ typical |
| | Carrier frequency > 26.5 GHz | -90 dBc nominal |
| Second harmonic distortion (SHI) | | |
| RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +9 dB; see Specifications Guide for verification conditions | | |
| RF/MW (Option 503/508/526) | | |
| RF Preselector Off, Preamp Off | 10 to 500 MHz | +54 dBm, +61 dBm typical |
| | 500 MHz to 1.8 GHz | +45 dBm, +54 dBm typical |
| | 1.8 to 4 GHz | +60 dBm, +67 dBm typical |
| | 4 to 11 GHz | +65 dBm, +74 dBm typical |
| | 11 to 13.25 GHz | +65 dBm, +73 dBm typical |
| RF Preselector Off, Preamp Off | 10 to 30 MHz | +45 dBm, +50 dBm typical |
| | 30 to 500 MHz | +54 dBm, +58 dBm typical |
| | 500 MHz to 1 GHz | +70 dBm, +78 dBm typical |
| | 1 to 1.6 GHz | +62 dBm, +70 dBm typical |
| | 1.6 to 1.8 GHz | +70 dBm, +82 dBm typical |
| | 1.8 to 4 GHz | +60 dBm, +67 dBm typical |
| | 4 to 11 GHz | +65 dBm, +74 dBm typical |
| 11 to 13.25 GHz | +65 dBm, +73 dBm typical | |

1. Input terminated, 0 dB input attenuation.
2. N is the LO multiplication factor.

| Millimeter-Wave (Option 544) | | |
|---|--------------------------|--------------------------|
| RF Preselector Off, Preamp Off | 10 to 500 MHz | +53 dBm, +61 dBm typical |
| | 500 MHz to 1.8 GHz | +44 dBm, +54 dBm typical |
| | 1.8 to 4 GHz | +58 dBm, +67 dBm typical |
| | 4 to 11 GHz | +62 dBm, +69 dBm typical |
| | 11 to 13.25 GHz | +65 dBm, +73 dBm typical |
| | 13.2 to 17.25 GHz | +63 dBm, +71 dBm typical |
| | 17.2 GHz to 22 GHz | +54 dBm, +67 dBm typical |
| RF Preselector On, Preamp Off | 10 to 30 MHz | +45 dBm, +50 dBm typical |
| | 30 to 500 MHz | +54 dBm, +58 dBm typical |
| | 500 MHz to 1 GHz | +70 dBm, +78 dBm typical |
| | 1 to 1.6 GHz | +62 dBm, +70 dBm typical |
| | 1.6 to 1.8 GHz | +70 dBm, +82 dBm typical |
| | 1.8 to 4 GHz | +58 dBm, +67 dBm typical |
| | 4 to 11 GHz | +62 dBm, +69 dBm typical |
| | 11 to 13.25 GHz | +65 dBm, +73 dBm typical |
| | 13.2 to 17.25 GHz | +63 dBm, +71 dBm typical |
| 17.2 GHz to 22 GHz | +54 dBm, +67 dBm typical | |
| RF/MW/Millimeter-Wave (Option 503/508/526/544) | | |
| RF Preselector Off, Preamp On, LNA Off | 10 MHz to 1.8 GHz | +33 dBm nominal |
| | 1.8 to 2.5 GHz | +20 dBm nominal |
| | 2.5 to 4.0 GHz | +0 dBm nominal |
| | 4 to 4.5 GHz | +5 dBm nominal |
| | 4.5 to 13.25 GHz | +10 dBm nominal |
| | 13.2 to 22 GHz | +5 dBm nominal |
| RF Preselector On, Preamp On, LNA Off | 10 to 30 MHz | +43 dBm nominal |
| | 30 to 500 MHz | +56 dBm nominal |
| | 500 MHz to 1 GHz | +61 dBm nominal |
| | 1 to 1.6 GHz | +57 dBm nominal |
| | 1.6 to 1.8 GHz | +57 dBm nominal |
| | 1.8 to 2.5 GHz | +20 dBm nominal |
| | 2.5 to 4.0 GHz | +0 dBm nominal |
| | 4.0 to 4.5 GHz | +5 dBm nominal |
| | 4.5 to 13.25 GHz | +10 dBm nominal |
| 13.2 to 22 GHz | +5 dBm nominal | |
| RF Preselector Off, Preamp Off or On, LNA On | 30 MHz to 1.8 GHz | +15 dBm nominal |
| RF Preselector On, Preamp Off or On, LNA On | 30 MHz to 1 GHz | +17 dBm nominal |
| | 1 to 1.8 GHz | +15 dBm nominal |

| | | |
|--|--------------------|------------------------------|
| RF Preselector Off or On, Preamp Off, LNA On | 1.8 to 13.25 GHz | +15 dBm nominal |
| | 13.2 to 22 GHz | +12 dBm nominal |
| RF Preselector Off or On, Preamp On, LNA On | 1.8 to 4.0 GHz | -7 dBm nominal |
| | 4.0 to 13.25 GHz | -5 dBm nominal |
| | 13.2 to 22 GHz | -7 dBm nominal |
| Third-order intermodulation distortion (TOI) | | |
| RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance + 9 dB; Tone separation > 5 times IF prefilter bandwidth, 20 to 30 °C, see Specifications Guide for verification conditions | | |
| RF/MW (Option 503/508/526) | | |
| RF Preselector Off, Preamp Off | 10 to 100 MHz | +12 dBm, +17 dBm typical |
| | 100 to 400 MHz | +15 dBm, +18 dBm typical |
| | 400 MHz to 3.6 GHz | +17 dBm, +20 dBm typical |
| | 3.5 to 8.4 GHz | +15 dBm, +20 dBm typical |
| | 8.3 to 13.6 GHz | +16 dBm, +20 dBm typical |
| | 13.5 to 26.5 GHz | +12 dBm, +16 dBm typical |
| RF Preselector On, Preamp Off | 10 to 30 MHz | +16.5 dBm, +18 dBm typical |
| | 30 to 100 MHz | +13.5 dBm, +15.5 dBm typical |
| | 100 to 1GHz | +15 dBm, +17 dBm typical |
| | 1 to 1.5 GHz | +16 dBm, +17.5 dBm typical |
| | 1.5 to 3.6 GHz | +17 dBm, +19.5 dBm typical |
| | 3.5 to 8.4 GHz | +15 dBm, +20 dBm typical |
| | 8.3 to 13.6 GHz | +16 dBm, +20 dBm typical |
| | 13.5 to 26.5 GHz | +12 dBm, +16 dBm typical |
| RF Preselector Off, Preamp On, LNA Off | 10 to 500 MHz | +1 dBm nominal |
| | 500 MHz to 3.6 GHz | +3 dBm nominal |
| | 3.5 to 26.5 GHz | -10 dBm nominal |
| RF Preselector On, Preamp On, LNA Off | 10 to 30 MHz | +1 dBm, +3 dBm typical |
| | 30 MHz to 1 GHz | -3 dBm, -1 dBm typical |
| | 1 to 2 GHz | -1 dBm, +1 dBm typical |
| | 2 to 3.6 GHz | -1 dBm, +2 dBm typical |
| | 3.5 to 26.5 GHz | -10 dBm nominal |
| RF Preselector Off, Preamp Off or On, LNA On | 30 to 500 MHz | 0 dBm nominal |
| | 500 MHz to 3.6 GHz | +1 dBm nominal |
| RF Preselector On, Preamp Off or On, LNA On | 30 MHz to 1 GHz | -8 dBm, -6 dBm typical |
| | 1 to 2 GHz | -6 dBm, -4 dBm typical |
| | 2 to 3.6 GHz | -4 dBm, -2 dBm typical |

| | | |
|---|----------------------|------------------------------|
| RF Preselector Off or On, Preamp Off, LNA On | 3.5 to 13.6 GHz | +5 dBm nominal |
| | 13.5 to 26.5 GHz | +1 dBm nominal |
| RF Preselector Off or On, Preamp On, LNA On | 3.5 to 13.6 GHz | -14 dBm nominal |
| | 13.5 to 26.5 GHz | -20 dBm nominal |
| Millimeter-Wave (Option 544) | | |
| RF Preselector On, Preamp Off | 10 to 100 MHz | +12 dBm, +17 dBm typical |
| | 100 to 400 MHz | +12 dBm, +18 dBm typical |
| | 400 MHz to 3.6 GHz | +17 dBm, +20 dBm typical |
| | 3.5 to 8.4 GHz | +15 dBm, +20 dBm typical |
| | 8.3 to 13.6 GHz | +16 dBm, +20 dBm typical |
| | 13.5 to 26.5 GHz | +9 dBm, +13 dBm typical |
| | 26.4 GHz to 34.5 GHz | +11 dBm, +15.5 dBm typical |
| RF Preselector On, Preamp Off | 34.4 GHz to 44 GHz | +6 dBm, +10 dBm typical |
| | 10 to 30 MHz | +16.5 dBm, +18 dBm typical |
| | 30 to 100 MHz | +12.5 dBm, +14.5 dBm typical |
| | 100 MHz to 1 GHz | +14.5 dBm, +16.5 dBm typical |
| | 1 to 1.5 GHz | +16 dBm, +17.5 dBm typical |
| | 1.5 to 3.6 GHz | +17 dBm, +19.5 dBm typical |
| | 3.5 to 8.4 GHz | +15 dBm, +20 dBm typical |
| | 8.3 to 13.6 GHz | +16 dBm, +20 dBm typical |
| | 13.5 to 26.5 GHz | +9 dBm, +13 dBm typical |
| | 26.4 GHz to 34.5 GHz | +11 dBm, +15.5 dBm typical |
| RF Preselector Off, Preamp On, LNA Off | 34.4 GHz to 44 GHz | +6 dBm, +10 dBm typical |
| | 10 to 500 MHz | +1 dBm nominal |
| | 500 MHz to 3.6 GHz | +3 dBm nominal |
| | 3.5 to 13.6 GHz | -10 dBm nominal |
| | 13.5 to 34.5 GHz | -15 dBm nominal |
| RF Preselector On, Preamp On, LNA Off | 34.4 GHz to 44 GHz | -20 dBm nominal |
| | 10 to 30 MHz | +1 dBm, +3 dBm typical |
| | 30 MHz to 1 GHz | -5 dBm, -1 dBm typical |
| | 1 to 2 GHz | -1 dBm, +1 dBm typical |
| | 2 to 3.6 GHz | -1 dBm, +2 dBm typical |
| | 3.5 to 13.6 GHz | -10 dBm nominal |
| | 13.5 to 34.5 GHz | -15 dBm nominal |
| RF Preselector Off, Preamp Off or On, LNA On | 34.4 GHz to 44 GHz | -20 dBm nominal |
| | 30 to 500 MHz | +0 dBm nominal |
| | 500 MHz to 3.6 GHz | +1 dBm nominal |

| | | | |
|---|----------------------|------------------------|--------------------------------|
| RF Preselector On, Preamp Off or On, LNA On | 30 MHz to 1 GHz | -8 dBm, -6 dBm typical | |
| | 1 to 2 GHz | -6 dBm, -4 dBm typical | |
| | 2 to 3.6 GHz | -4 dBm, -2 dBm typical | |
| RF Preselector Off or On, Preamp Off, LNA On | 3.5 to 13.6 GHz | +0 dBm nominal | |
| | 13.5 to 26.5 GHz | -3 dBm nominal | |
| | 26.4 GHz to 34.5 GHz | +2 dBm nominal | |
| | 34.4 GHz to 44 GHz | -3 dBm nominal | |
| RF Preselector Off or On, Preamp On, LNA On | 3.5 to 13.6 GHz | -18 dBm nominal | |
| | 13.5 to 26.5 GHz | -20 dBm nominal | |
| | 26.4 GHz to 34.5 GHz | -18 dBm nominal | |
| | 34.4 GHz to 44 GHz | -27 dBm nominal | |
| Displayed average noise level (DANL) | | | |
| Input terminated, 1 Hz RBW, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 20 to 30°C. Input 1; Input 2 = Input 1 performance + 11 dB; NFE = Noise Floor Extension | | | |
| | | Specification | Typical including NFE |
| RF/MW (Option 503/508/526) | | | |
| RF Preselector Off, Preamp Off | 1 Hz | | -70 dBm, nominal ¹ |
| | 2 Hz to 10 Hz | | -110 dBm, nominal ¹ |
| | 20 Hz | -120 dBm | |
| | 100 Hz | -125 dBm | |
| | 1 kHz | -130 dBm | |
| | 9 to 150 kHz | -142 dBm | |
| | 150 kHz to 1 MHz | -153 dBm | |
| | 1 to 10 MHz | -154 dBm | |
| | 10 MHz to 1 GHz | -154 dBm | -164 dBm |
| | 1 to 2.5 GHz | -151 dBm | -161 dBm |
| | 2.5 to 3.6 GHz | -148 dBm | -158 dBm |
| | 3.5 to 8.4 GHz | -153 dBm | -163 dBm |
| | 8.3 to 13.6 GHz | -152 dBm | -162 dBm |
| | 13.5 to 18 GHz | -150 dBm | -160 dBm |
| | 18 to 25 GHz | -146 dBm | -155 dBm |
| 25 to 26.5 GHz | -143 dBm | -155 dBm | |

1. No NFE factor at this frequency.

| | | | |
|---|-------------------|----------|--------------------------------|
| RF Preselector On, Preamp Off | 1 Hz | | -70 dBm, nominal ¹ |
| | 2 Hz to 10 Hz | | -110 dBm, nominal ¹ |
| | 20 Hz | -120 dBm | |
| | 100 Hz | -125 dBm | |
| | 1 kHz | -130 dBm | |
| | 9 to 100 kHz | -141 dBm | -143 dBm |
| | 100 to 150 kHz | -142 dBm | -163 dBm |
| | 150 to 500 kHz | -149 dBm | -161 dBm |
| | 500 kHz to 30 MHz | -153 dBm | -163 dBm |
| | 30 MHz to 1 GHz | -154 dBm | -165 dBm |
| | 1 to 1.7 GHz | -156 dBm | -166 dBm |
| | 1.7 to 2.5 GHz | -153 dBm | -163 dBm |
| | 2.5 to 3.6 GHz | -151 dBm | -161 dBm |
| | 3.5 to 8.4 GHz | -153 dBm | -163 dBm |
| | 8.3 to 13.6 GHz | -152 dBm | -162 dBm |
| | 13.5 to 18 GHz | -150 dBm | -160 dBm |
| | 18 to 25 GHz | -146 dBm | -155 dBm |
| | 25 to 26.5 GHz | -143 dBm | -155 dBm |
| RF Preselector Off, Preamp On, LNA Off | 100 kHz to 1 MHz | -157 dBm | |
| | 1 to 10 MHz | -165 dBm | |
| | 10 MHz to 1 GHz | -165 dBm | -174 dBm |
| | 1 to 3.6 GHz | -161 dBm | -172 dBm |
| | 3.5 to 13.6 GHz | -164 dBm | -174 dBm |
| | 13.5 to 26.5 GHz | -160 dBm | -170 dBm |
| RF Preselector On, Preamp On, LNA Off | 1 kHz | -145 dBm | -150 dBm |
| | 9 to 100 kHz | -160 dBm | -161 dBm |
| | 100 to 1 MHz | -160 dBm | -171 dBm |
| | 1 to 30 MHz | -163 dBm | -173 dBm |
| | 30 MHz to 1 GHz | -164 dBm | -174 dBm |
| | 1 to 1.7 GHz | -165 dBm | -174 dBm |
| | 1.7 to 2.5 GHz | -164 dBm | -174 dBm |
| | 2.5 to 3.6 GHz | -161 dBm | -172 dBm |
| | 3.5 to 13.6 GHz | -164 dBm | -174 dBm |
| | 13.5 to 26.5 GHz | -160 dBm | -170 dBm |

1. No NFE factor at this frequency.

| | | | |
|--|------------------|----------|--------------------------------|
| RF Preselector Off, Preamp Off or On, LNA On | 150 kHz to 1 MHz | | -92 dBm |
| | 1 to 10 MHz | | -119 dBm |
| | 10 to 30 MHz | | -148 dBm |
| | 30 to 50 MHz | -161 dBm | -172 dBm |
| | 50 to 150 MHz | -165 dBm | -172 dBm |
| | 150 MHz to 2 GHz | -167 dBm | -172 dBm |
| | 2 to 3.6 GHz | -164 dBm | -172 dBm |
| RF Preselector On, Preamp Off or On, LNA On | 150 kHz to 1 MHz | | -100 dBm |
| | 1 to 10 MHz | | -125 dBm |
| | 10 to 30 MHz | | -165 dBm |
| | 30 to 50 MHz | -163 dBm | -174 dBm |
| | 50 to 100 MHz | -165 dBm | -174 dBm |
| | 100 to 150 MHz | -166 dBm | -174 dBm |
| | 150 MHz to 2 GHz | -166 dBm | -174 dBm |
| RF Preselector Off/On, Preamp Off, LNA On | 2 to 3.6 GHz | -165 dBm | -174 dBm |
| | 3.5 to 8.4 GHz | -165 dBm | -172 dBm |
| | 8.3 to 13.6 GHz | -164 dBm | -171 dBm |
| | 13.5 to 19 GHz | -163 dBm | -170 dBm |
| | 19 to 22GHz | -161 dBm | -170 dBm |
| RF Preselector Off/On, Preamp On, LNA On | 22 to 26.5 GHz | -157 dBm | -168 dBm |
| | 3.5 to 8 GHz | -167 dBm | -174 dBm |
| | 8 to 13.6 GHz | -166 dBm | -174 dBm |
| | 13.5 to 19 GHz | -165 dBm | -173 dBm |
| | 19 to 22 GHz | -164 dBm | -173 dBm |
| 22 to 26.5 GHz | -163 dBm | -172 dBm | |
| Millimeter-Wave (Option 544) | | | |
| RF Preselector Off, Preamp Off | 1 Hz | | -70 dBm, nominal ¹ |
| | 2 Hz to 10 Hz | | -105 dBm, nominal ¹ |
| | 20 Hz | -115 dBm | |
| | 100 Hz | -125 dBm | |
| | 1 kHz | -130 dBm | |
| | 9 to 150 kHz | -142 dBm | |
| | 150 kHz to 1 MHz | -153 dBm | |
| | 1 to 10 MHz | -154 dBm | |
| | 10 MHz to 1 GHz | -154 dBm | -164 dBm |
| | 1 to 2.5 GHz | -151 dBm | -161 dBm |
| | 2.5 to 3.6 GHz | -148 dBm | -158 dBm |
| | 3.5 to 8.4 GHz | -149 dBm | -161 dBm |
| | 8.3 to 13.6 GHz | -150 dBm | -162 dBm |
| | 13.5 to 18 GHz | -147 dBm | -158 dBm |
| | 18 to 25 GHz | -144 dBm | -155 dBm |
| | 25 to 26.5 GHz | -142 dBm | -154 dBm |

1. No NFE factor at this frequency.

| | | | |
|--|-------------------|----------|--------------------------------|
| RF Preselector Off, Preamp Off (Continued) | 26.4 to 34.5 GHz | -142 dBm | -156 dBm |
| | 34.4 to 40 GHz | -137 dBm | -151 dBm |
| | 40 to 42 GHz | -135 dBm | -150 dBm |
| | 42 to 44 GHz | -133 dBm | -147 dBm |
| RF Preselector On, Preamp Off | 1 Hz | | -70 dBm, nominal ¹ |
| | 2 Hz to 10 Hz | | -105 dBm, nominal ¹ |
| | 20 Hz | -115 dBm | |
| | 100 Hz | -125 dBm | |
| | 1 kHz | -130 dBm | |
| | 9 to 100 kHz | -141 dBm | -143 dBm |
| | 100 to 150 kHz | -142 dBm | -163 dBm |
| | 150 to 500 kHz | -149 dBm | -161 dBm |
| | 500 kHz to 30 MHz | -153 dBm | -163 dBm |
| | 30 MHz to 1 GHz | -154 dBm | -165 dBm |
| | 1 to 1.7 GHz | -156 dBm | -166 dBm |
| | 1.7 to 2.5 GHz | -153 dBm | -163 dBm |
| | 2.5 to 3.6 GHz | -151 dBm | -161 dBm |
| | 3.5 to 8.4 GHz | -149 dBm | -161 dBm |
| | 8.3 to 13.6 GHz | -150 dBm | -162 dBm |
| | 13.5 to 18 GHz | -147 dBm | -158 dBm |
| | 18 to 25 GHz | -144 dBm | -155 dBm |
| | 25 to 26.5 GHz | -142 dBm | -154 dBm |
| | 26.4 to 34.5 GHz | -142 dBm | -156 dBm |
| | 34.4 to 40 GHz | -137 dBm | -151 dBm |
| 40 to 42 GHz | -135 dBm | -150 dBm | |
| 42 to 44 GHz | -133 dBm | -147 dBm | |
| RF Preselector Off, Preamp On, LNA Off | 100 kHz to 1 MHz | -157 dBm | |
| | 1 to 10 MHz | -165 dBm | |
| | 10 MHz to 1 GHz | -165 dBm | -174 dBm |
| | 1 to 3.6 GHz | -161 dBm | -172 dBm |
| | 3.5 to 8.4 GHz | -162 dBm | -174 dBm |
| | 8.3 to 13.6 GHz | -164 dBm | -174 dBm |
| | 13.5 to 26.5 GHz | -160 dBm | -170 dBm |
| | 26.4 to 34.5 GHz | -158 dBm | -169 dBm |
| | 34.4 to 42 GHz | -155 dBm | -165 dBm |
| | 42 to 43 GHz | -151 dBm | -162 dBm |
| 43 to 44 GHz | -149 dBm | | |

1. No NFE factor at this frequency.

| | | | |
|--|------------------|----------|----------|
| RF Preselector On, Preamp On, LNA Off | 1 kHz | -145 dBm | -150 dBm |
| | 9 to 100 kHz | -160 dBm | -161 dBm |
| | 100 to 1 MHz | -160 dBm | -171 dBm |
| | 1 to 30 MHz | -163 dBm | -173 dBm |
| | 30 MHz to 1 GHz | -164 dBm | -174 dBm |
| | 1 to 1.7 GHz | -165 dBm | -174 dBm |
| | 1.7 to 2.5 GHz | -164 dBm | -174 dBm |
| | 2.5 to 3.6 GHz | -161 dBm | -172 dBm |
| | 3.5 to 8.4 GHz | -162 dBm | -174 dBm |
| | 8.3 to 13.6 GHz | -164 dBm | -174 dBm |
| | 13.5 to 26.5 GHz | -160 dBm | -170 dBm |
| | 26.4 to 34.5 GHz | -158 dBm | -169 dBm |
| | 34.4 to 42 GHz | -155 dBm | -165 dBm |
| | 42 to 43 GHz | -151 dBm | -162 dBm |
| | 43 to 44 GHz | -149 dBm | |
| RF Preselector Off, Preamp Off or On, LNA On | 150 kHz to 1 MHz | | -92 dBm |
| | 1 to 10 MHz | | -119 dBm |
| | 10 to 30 MHz | | -148 dBm |
| | 30 to 50 MHz | -161 dBm | -172 dBm |
| | 50 to 150 MHz | -165 dBm | -172 dBm |
| | 150 MHz to 2 GHz | -167 dBm | -172 dBm |
| | 2 to 3.6 GHz | -164 dBm | -172 dBm |
| RF Preselector On, Preamp Off or On, LNA On | 150 kHz to 1 MHz | | -100 dBm |
| | 1 to 10 MHz | | -125 dBm |
| | 10 to 30 MHz | | -165 dBm |
| | 30 to 50 MHz | -163 dBm | -174 dBm |
| | 50 to 100 MHz | -165 dBm | -174 dBm |
| | 100 to 150 MHz | -166 dBm | -174 dBm |
| | 150 MHz to 2 GHz | -166 dBm | -174 dBm |
| | 2 to 3.6 GHz | -165 dBm | -174 dBm |
| RF Preselector Off/On, Preamp Off, LNA On | 3.5 to 8.4 GHz | -163 dBm | -172 dBm |
| | 8.3 to 13.6 GHz | -164 dBm | -171 dBm |
| | 13.5 to 19 GHz | -162 dBm | -170 dBm |
| | 19 to 22 GHz | -160 dBm | -170 dBm |
| | 22 to 26.5 GHz | -157 dBm | -168 dBm |
| | 26.4 to 34.5 GHz | -155 dBm | -167 dBm |
| | 34.4 to 40 GHz | -149 dBm | -163 dBm |
| | 40 to 42 GHz | -149 dBm | -162 dBm |
| | 42 to 43 GHz | -146 dBm | -160 dBm |
| 43 to 44 GHz | -146 dBm | | |

| | | | |
|---|------------------|----------|----------|
| RF Preselector Off/On, Preamp On, LNA On | 3.5 to 8 GHz | -165 dBm | -174 dBm |
| | 8 to 13.6 GHz | -166 dBm | -174 dBm |
| | 13.5 to 19 GHz | -165 dBm | -173 dBm |
| | 19 to 22 GHz | -164 dBm | -173 dBm |
| | 22 to 26.5 GHz | -163 dBm | -172 dBm |
| | 26.4 to 34.5 GHz | -160 dBm | -170 dBm |
| | 34.4 to 40 GHz | -158 dBm | -169 dBm |
| | 40 to 42 GHz | -158 dBm | -168 dBm |
| | 42 to 43 GHz | -156 dBm | -167 dBm |
| | 43 to 44 GHz | -149 dBm | |

| Indicated noise in CISPR bandwidth | | |
|---|-------------------------------|--------------------------------------|
| Calculated from Input 1 DANL performance, 0 dB input attenuation, EMI receiver mode, without Option WF1; EMI-AVG detector; CISPR BW | | |
| | | Typical (including NFE) ¹ |
| RF/MW (Option 503/508/526) | | |
| RF Preselector On, Preamp Off | 1 Hz (1 Hz RBW) | 32 dB μ V, nominal |
| | 10 Hz (1 Hz RBW) | 2 dB μ V, nominal |
| | 20 Hz (1 Hz RBW) | -19 dB μ V |
| | 100 Hz (10 Hz RBW) | -11 dB μ V |
| | 1 kHz (100 Hz RBW) | -9 dB μ V |
| | 9 to 50 kHz (200Hz RBW) | -14 dB μ V |
| | 150 kHz to 1 MHz (9 kHz RBW) | -8 dB μ V |
| | 1 to 30 MHz (9 kHz RBW) | -12 dB μ V |
| | 30 MHz to 1 GHz (120 kHz RBW) | -3 dB μ V |
| | 1 to 2.5 GHz (1 MHz RBW) | 8 dB μ V |
| | 2.5 to 3.6 GHz (1 MHz RBW) | 11 dB μ V |
| | 3.6 to 8.4 GHz (1 MHz RBW) | 8 dB μ V |
| | 8.4 to 13.6 GHz (1 MHz RBW) | 11 dB μ V |
| | 13.6 to 17.1 GHz (1 MHz RBW) | 12 dB μ V |
| | 17.1 to 25 GHz (1 MHz RBW) | 14 dB μ V |
| 25 to 26.5 GHz (1 MHz RBW) | 18 dB μ V | |

1. Typical Indicated Noise including NFE = Typical DANL + RBW correction – DANL Improvement with NFE +107.

| | | |
|---|-------------------------------|------------------------|
| RF Preselector On, Preamp On, LNA Off | 1 kHz (100 Hz RBW) | -24 dB μ V |
| | 9 to 150 kHz (200 Hz RBW) | -31 dB μ V |
| | 150 kHz to 1 MHz (9 kHz RBW) | -17 dB μ V |
| | 1 to 30 MHz (9 kHz RBW) | -20 dB μ V |
| | 30 MHz to 1 GHz (120 kHz RBW) | -11 dB μ V |
| | 1 to 2.5 GHz (1 MHz RBW) | -2 dB μ V |
| | 2.5 to 3.6 GHz (1 MHz RBW) | 0 dB μ V |
| | 3.6 to 8.4 GHz (1 MHz RBW) | -2 dB μ V |
| | 8.4 to 13.6 GHz (1 MHz RBW) | -2 dB μ V |
| | 13.6 to 17.1 GHz (1 MHz RBW) | -3 dB μ V |
| | 17.1 to 25 GHz (1 MHz RBW) | 1 dB μ V |
| | 25 to 26.5 GHz (1 MHz RBW) | 2 dB μ V |
| RF Preselector On, Preamp Off, LNA On | 30 MHz to 1 GHz (120 kHz RBW) | -11 dB μ V |
| | 1 to 2.5 GHz (1 MHz RBW) | -5 dB μ V |
| | 2.5 to 3.6 GHz (1 MHz RBW) | -3 dB μ V |
| | 3.6 to 8.4 GHz (1 MHz RBW) | -4 dB μ V |
| | 8.4 to 13.6 GHz (1 MHz RBW) | -3 dB μ V |
| | 13.6 to 17.1 GHz (1 MHz RBW) | -2 dB μ V |
| | 17.1 to 25 GHz (1 MHz RBW) | 1 dB μ V |
| | 25 to 26.5 GHz (1 MHz RBW) | 3 dB μ V |
| RF Preselector Off/On, Preamp On, LNA On | 3.6 to 8.4 GHz (1 MHz RBW) | -5 dB μ V |
| | 8.4 to 13.6 GHz (1 MHz RBW) | -4 dB μ V |
| | 13.6 to 17.1 GHz (1 MHz RBW) | -4 dB μ V |
| | 17.1 to 25 GHz (1 MHz RBW) | 0 dB μ V |
| | 25 to 26.5 GHz (1 MHz RBW) | 0 dB μ V |
| Millimeter-Wave (Option 544) | | |
| RF Preselector On, Preamp Off | 1 Hz (1 Hz RBW) | 32 dB μ V, nominal |
| | 10 Hz (1 Hz RBW) | 2 dB μ V, nominal |
| | 20 Hz (1 Hz RBW) | -9 dB μ V |
| | 100 Hz (10 Hz RBW) | -11 dB μ V |
| | 1 kHz (100 Hz RBW) | -9 dB μ V |
| | 9 to 50 kHz (200Hz RBW) | -14 dB μ V |
| | 150 kHz to 1 MHz (9 kHz RBW) | -8 dB μ V |
| | 1 to 30 MHz (9 kHz RBW) | -12 dB μ V |
| | 30 MHz to 1 GHz (120 kHz RBW) | -3 dB μ V |
| | 1 to 2.5 GHz (1 MHz RBW) | 8 dB μ V |
| | 2.5 to 3.6 GHz (1 MHz RBW) | 11 dB μ V |
| | 3.6 to 13.6 GHz (1 MHz RBW) | 12 dB μ V |
| | 13.6 to 17.1 GHz (1 MHz RBW) | 14 dB μ V |
| | 17.1 to 25 GHz (1 MHz RBW) | 18 dB μ V |

| | | |
|---|-------------------------------|----------------|
| RF Preselector On, Preamp Off (Continued) | 25 to 26.5 GHz (1 MHz RBW) | 19 dB μ V |
| | 26.5 to 34.5 GHz (1 MHz RBW) | 18 dB μ V |
| | 34.5 to 40 GHz (1 MHz RBW) | 22 dB μ V |
| | 40 to 42 GHz (1 MHz RBW) | 24 dB μ V |
| | 42 to 44 GHz (1 MHz RBW) | 27 dB μ V |
| RF Preselector On, Preamp On, LNA Off | 1 kHz (100 Hz RBW) | -24 dB μ V |
| | 9 to 150 kHz (200 Hz RBW) | -31 dB μ V |
| | 150 kHz to 1 MHz (9 kHz RBW) | -17 dB μ V |
| | 1 to 30 MHz (9 kHz RBW) | -20 dB μ V |
| | 30 MHz to 1 GHz (120 kHz RBW) | -11 dB μ V |
| | 1 to 2.5 GHz (1 MHz RBW) | -2 dB μ V |
| | 2.5 to 3.6 GHz (1 MHz RBW) | 0 dB μ V |
| | 3.6 to 8.4 GHz (1 MHz RBW) | -2 dB μ V |
| | 8.4 to 13.6 GHz (1 MHz RBW) | -2 dB μ V |
| | 13.6 to 17.1 GHz (1 MHz RBW) | -3 dB μ V |
| | 17.1 to 25 GHz (1 MHz RBW) | 1 dB μ V |
| | 25 to 34.5 GHz (1 MHz RBW) | 2 dB μ V |
| | 34.5 to 40 GHz (1 MHz RBW) | 5 dB μ V |
| | 40 to 42 GHz (1 MHz RBW) | 6 dB μ V |
| 42 to 43 GHz (1 MHz RBW) | 8 dB μ V | |
| 43 to 44 GHz (1 MHz RBW) | 18 dB μ V | |
| RF Preselector On, Preamp Off, LNA On | 30 MHz to 1 GHz (120 kHz RBW) | -11 dB μ V |
| | 1 to 2.5 GHz (1 MHz RBW) | -5 dB μ V |
| | 2.5 to 3.6 GHz (1 MHz RBW) | -3 dB μ V |
| | 3.6 to 17.1 GHz (1 MHz RBW) | -2 dB μ V |
| | 17.1 to 25 GHz (1 MHz RBW) | 3 dB μ V |
| | 25 to 34.5 GHz (1 MHz RBW) | 5 dB μ V |
| | 34.5 to 40 GHz (1 MHz RBW) | 9 dB μ V |
| | 40 to 42 GHz (1 MHz RBW) | 10 dB μ V |
| | 42 to 43 GHz (1 MHz RBW) | 13 dB μ V |
| 43 to 44 GHz (1 MHz RBW) | 19 dB μ V | |
| RF Preselector Off/On, Preamp On, LNA On | 3.6 to 8.4 GHz (1 MHz RBW) | -5 dB μ V |
| | 8.4 to 17.1 GHz (1 MHz RBW) | -4 dB μ V |
| | 17.1 to 26.5 GHz (1 MHz RBW) | 0 dB μ V |
| | 26.5 to 34.5 GHz (1 MHz RBW) | 2 dB μ V |
| | 34.5 to 42 GHz (1 MHz RBW) | 4 dB μ V |
| | 42 to 43 GHz (1 MHz RBW) | 5 dB μ V |
| | 43 to 44 GHz (1 MHz RBW) | 18 dB μ V |

| Phase noise ¹ | Offset | Specification | Typical |
|--------------------------|---------|---------------|----------------------|
| 20 to 30 °C, CF = 1 GHz | 10 Hz | | -80 dBc/Hz, nominal |
| | 100 Hz | -91 dBc/Hz | -100 dBc/Hz, typical |
| | 1 kHz | -109 dBc/Hz | -112 dBc/Hz, typical |
| | 10 kHz | -113 dBc/Hz | -114 dBc/Hz, typical |
| | 100 kHz | -116 dBc/Hz | -117 dBc/Hz, typical |
| | 1 MHz | -134 dBc/Hz | -135 dBc/Hz, typical |
| | 10 MHz | | -148 dBc/Hz, nominal |

PowerSuite Measurement Specifications

| Channel Power | | |
|---|---|-----------------------------|
| Amplitude accuracy, W-CDMA or IS95 (20 to 30 °C, attenuation = 10 dB) | ± 0.82 dB | ± 0.23 dB (95th percentile) |
| Occupied bandwidth | | |
| Frequency accuracy | | ± [span/1000] nominal |
| Adjacent channel power | | |
| | Adjacent | Alternate |
| Accuracy, W-CDMA (ACLR) (at specific mixer levels and ACLR ranges) | | |
| MS | ± 0.14 dB | ± 0.21 dB |
| BTS | ± 0.49 dB | ± 0.44 dB |
| Dynamic range | | |
| Without noise correction | -73 dB typical | -79 dB typical |
| With noise correction | -78 dB typical | -82 dB typical |
| Offset channel pairs measured | 1 to 6 | |
| ACP measurement and transfer time (fast method) | 14 ms nominal ($\sigma = 0.2$ dB) | |
| Multiple number of carriers measured | Up to 12 | |
| Power statistics CCDF | | |
| Histogram resolution | 0.01 dB | |
| Harmonic distortion | | |
| Maximum harmonic number | 10th | |
| Result | Fundamental power (dBm), relative harmonics power (dBc), total harmonic distortion in % | |
| Intermod (TOI) | Measure the third-order products and intercepts from two tones | |

1. For nominal phase noise plot, please refer to Page 49, N9048B Specification Guide, Publish number N9048-90010.

| Burst power | | |
|--|---|------------------|
| Methods | Power above threshold, power within burst width | |
| Result | Single burst output power, average output power, maximum power, minimum power within burst, burst width | |
| Spurious emission | | |
| W-CDMA (1 to 3.6 GHz) table-driven spurious signals; search across regions | | |
| Dynamic range | 96.7 dB | 101.7 dB typical |
| Absolute sensitivity | -85.4 dBm | |
| Spectrum emission mask (SEM) | | |
| cdma2000® (750 kHz offset) | | |
| Relative dynamic range (30 kHz RBW) | 78.9 dB | 85 dB typical |
| Absolute sensitivity | -100.7 dBm | |
| Relative accuracy | ± 0.12 dB | |
| 3GPP W-CDMA (2.515 MHz offset) | | |
| Relative dynamic range (30 kHz RBW) | 81.9 dB | 88.2 dB typical |
| Absolute sensitivity | -100.7 dBm | |
| Relative accuracy | ± 0.12 dB | |

General Specifications

| Temperature range | |
|--|---|
| Operating | 0 to 55 °C |
| Storage | -40 to 70 °C |
| EMC | |
| Complies with the essential requirements of the European EMC Directive as well as current editions of the following standards (dates and editions are cited in the Declaration of Conformity): | |
| IEC/EN 61326-2-1 | |
| CISPR 11, Group 1, Class B | |
| AS/NZS CISPR 11 | |
| ICES/NMB-001 | |
| This ISM device complies with Canadian ICES-001 | |
| Cet appareil ISM est conforme à la norme NMB-001 du Canada | |
| Radio disturbance measuring apparatus | |
| CISPR 16-1-1 | The features in this instrument comply with the performance requirements of this basic standard |

| Safety | | |
|---|--|--|
| Complies with European Low Voltage Directive 2006/95/EC | | |
| IEC/EN 61010-1 | | |
| Canada: CSA C22.2 No. 61010-01 | | |
| USA: UL 61010-1 | | |
| Acoustic noise emission | Geraeuschemission | |
| LpA < 70 dB | LpA < 70 dB | |
| Operator position | Am Arbeitsplatz | |
| Normal position | Normaler Betrieb | |
| Per ISO 7779 | Nach DIN 45635 t.19 | |
| Environmental stress | | |
| Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of Storage, Transportation and End-use; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude and power line conditions. Test Methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3. | | |
| Power requirements | | |
| Voltage and frequency (nominal) | 100/120 V, 50/60/400 Hz | The instruments can operate with mains supply voltage fluctuations up to $\pm 10\%$ of the nominal voltage |
| | 220/240 V, 50/60 Hz | |
| Power consumption | | |
| On | 630 W maximum | |
| Standby | 20 W | |
| Typical instrument configuration | Power (nominal) | |
| Base PXE instrument | 300 W | |
| Adding Option WF1 to base instrument | +150 W | |
| Display | | |
| Resolution | 1280 x 800 | |
| Size | 269 mm (10.6 in.) diagonal (nominal) capacitive multi-touch screen | |
| Data storage | | |
| Internal | Removable solid state drive (≥ 160 GB standard) | |
| External | Supports USB 3.0/2.0 compatible memory devices | |
| Weight (without options) | | |
| Net | | |
| RF/MW (Option 503/508/526) | 24 kg (52 lbs.) (nominal) | |
| Millimeter-Wave (Option 544) | 27 kg (60 lbs.) (nominal) | |
| Shipping | | |
| RF/MW (Option 503/508/526) | 36 kg (79 lbs.) (nominal) | |
| Millimeter-Wave (Option 544) | 39 kg (86 lbs.) (nominal) | |

| Dimensions | |
|--|------------------|
| Height | 177 mm (7 in) |
| Width | 426 mm (16.8 in) |
| Length | 556 mm (21.9 in) |
| Calibration cycle | |
| The recommended calibration cycle is one year; calibration services are available through Keysight service centers | |

Inputs and Outputs

| Front panel | |
|-------------------------------------|---|
| RF input | |
| RF input 1 Connector | Type-N female, 50 Ω nominal (standard for Option 503, 508 and 526) |
| | 2.4 mm male, 50 Ω nominal (standard for Option 544) |
| | 3.5 mm male, 50 Ω (Option C35, with Option 526 only) |
| RF input 2 Connector | Type-N female, 50 Ω nominal (standard) |
| External Mixing (Option EXM) | |
| Connection port | |
| Connector | SMA, female |
| Impedance | 50 Ω , nominal |
| Functions | Triplexed for LO output, IF input, and mixer bias |
| Mixer bias range | \pm 10 mA in 10 μ A step |
| IF input center frequency | |
| \leq 25 MHz IF path | 322.5 MHz |
| 40 MHz BW IF path | 250.0 MHz |
| LO output frequency range | |
| | 3.75 to 14.0 GHz |
| Probe power | |
| Voltage/current | +15 Vdc, \pm 7% at 150 mA max (nominal) |
| | -12.6 Vdc, \pm 10% at 150 mA max (nominal) |
| USB ports | |
| Host (3 ports) | |
| Standard | One compatible with USB 3.0; Two compatible with USB 2.0 |
| Connector | USB Type-A female |
| Output current | |
| Port marked with Lightning Bolt | 1.2 A (nominal) |
| Port not marked with Lightning Bolt | 0.5 A |

| Headphone jack | |
|-----------------------------------|--|
| Connector | Miniature stereo audio jack 3.5 mm |
| Rear panel | |
| 10 MHz out | |
| Connector | BNC female, 50 Ω (nominal) |
| Output amplitude | ≥ 0 dBm (nominal) |
| Frequency | 10 MHz \times (1+ frequency reference accuracy) |
| Ext Ref In | |
| Connector | BNC female, 50 Ω (nominal) |
| Input amplitude range | -5 to 10 dBm (nominal) |
| Input frequency | 1 to 50 MHz (nominal) |
| Frequency lock range | $\pm 2 \times 10^{-6}$ of ideal external reference input frequency |
| Trigger 1 and 2 inputs | |
| Connector | BNC female |
| Impedance | > 10 k Ω (nominal) |
| Trigger level range | -5 to 5 V |
| Trigger 1 and 2 outputs | |
| Connector | BNC female |
| Impedance | > 10 k Ω (nominal) |
| Trigger level range | 0 to 5 V (CMOS) |
| Monitor output 1 | |
| Connector | VGA compatible, 15-pin mini D-SUB |
| Format | XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB |
| Resolution | 1024 x 768 |
| Monitor output 2 | |
| Connector | Mini DisplayPort |
| Resolution | 1024 x 768 |
| Noise source drive +28 V (pulsed) | |
| Connector | BNC female |
| SNS Series noise source | For use with Keysight Technologies' SNS series noise sources |
| Analog out | |
| Connector | BNC female (used by Option YAS) |

| USB ports | |
|--|--|
| Host, Super Speed (2 ports) | |
| Standard | Compatible with USB 3.0 |
| Connector | USB Type-A female |
| Output current | 0.9 A (nominal) |
| Host, stacked with LAN (1 port) | |
| Standard | Compatible with USB 3.0 |
| Connector | USB Type-A female |
| Output current | 0.5 A (nominal) |
| Device (1 port) | |
| Standard | Compatible with USB 3.0 |
| Connector | USB Type-B female |
| GPIB interface | |
| Connector | IEEE-488 bus connector |
| GPIB codes | SH1, AH1, T6, SR1, RL1, PP0, DC1, C1, C2, C3, C28, DT1, L4, C0 |
| GPIB mode | Controller or device |
| LAN TCP/IP interface | |
| Standard | 1000Base-T |
| Connector | RJ45 Ethertwist |
| Aux I/O connector | |
| Connector | 25-pin D-SUB |

IQ Analyzer

| Resolution bandwidth (spectrum measurement) | | |
|--|--|-------------------|
| Range | Overall | 100 mHz to 3 MHz |
| | Span = 1 MHz | 50 Hz to 1 MHz |
| | Span = 10 kHz | 1 Hz to 10 kHz |
| | Span = 100 Hz | 100 mHz to 100 Hz |
| Window shapes | | |
| Flat top, Uniform, Hanning, Gaussian, Blackman, Blackman-Harris, Kaiser Bessel (K-B 70 dB, K-B 90 dB and K-B 110 dB) | | |
| Analysis bandwidth | | |
| Standard | Optional | |
| 10 MHz | 25 MHz (Option B25), 40 MHz (Option B40) | |
| IF frequency response (standard 10 MHz IF path) | | |
| Demodulation and FFT response relative to the center frequency | | |

| Center frequency | Span | Preselector | Max. error | RMS (nominal) |
|--|---------------|---------------------------|-----------------|---------------|
| $f < 3.6$ GHz | ≤ 10 MHz | NA | ± 0.4 dB | 0.04 dB |
| 3.6 GHz $\leq f < 26.5$ GHz | ≤ 10 MHz | On | | 0.25 dB |
| 26.5 GHz $\leq f \leq 44$ GHz | ≤ 10 MHz | On | | 0.35 dB |
| IF phase linearity (deviation from mean phase linearity, nominal) | | | | |
| Center frequency | Span | Preselector | Peak-to-Peak | RMS |
| 20 MHz $\leq f < 3.6$ GHz | ≤ 10 MHz | NA | $\pm 0.5^\circ$ | 0.2° |
| 3.6 GHz $\leq f < 26.5$ GHz | ≤ 10 MHz | On | $\pm 1.5^\circ$ | 0.4° |
| 26.5 GHz $\leq f \leq 44$ GHz | ≤ 10 MHz | On | $\pm 1.5^\circ$ | 0.5° |
| Data acquisition | | | | |
| Time record length | (IQ analyzer) | 4,000,000 IQ sample pairs | | |
| Sample rate | | | | |
| IF path ≤ 25 MHz | | 100 Msa/s | | |
| IF path = 40 MHz | | 200 MSa/s | | |
| ADC resolution | | | | |
| IF path ≤ 25 MHz | | 16 bits | | |
| IF path = 40 MHz | | 12 bits | | |
| IF frequency response (25 MHz IF path, demodulation and FFT response relative to the center frequency) | | | | |
| Center frequency | Span | Preselector | Max. error | RMS (nominal) |
| $f < 3.6$ GHz | ≤ 25 MHz | NA | ± 0.45 dB | 0.05 dB |
| 3.6 GHz $\leq f < 26.5$ GHz | ≤ 25 MHz | On | | 0.45 dB |
| 26.5 GHz $\leq f \leq 44$ GHz | ≤ 25 MHz | On | | 0.55 dB |
| IF phase linearity (deviation from mean phase linearity, nominal) | | | | |
| Center frequency | Span | Preselector | Peak-to-Peak | RMS |
| 20 MHz $\leq f < 3.6$ GHz | ≤ 25 MHz | NA | $\pm 0.5^\circ$ | 0.2° |
| IF frequency response (40 MHz IF path, demodulation and FFT response relative to the center frequency) | | | | |
| Center frequency | Span | Preselector | Max. error | RMS (nominal) |
| 30 MHz $\leq f < 3.6$ GHz | ≤ 40 MHz | NA | ± 0.4 dB | 0.07 dB |
| IF phase linearity (deviation from mean phase linearity, nominal) | | | | |
| Center frequency | Span | Preselector | Peak-to-Peak | RMS |
| 20 MHz $\leq f < 3.6$ GHz | ≤ 40 MHz | NA | $\pm 0.5^\circ$ | 0.12° |

Time Domain Scan (TDS)

| Frequency range | | |
|---|--|----------------------|
| Standard time domain scan (Accelerated TDS = Off) Option N9048TDSB | 20 Hz to 44 GHz | |
| Accelerated time domain scan (Accelerated TDS = On) Option N9048WT1B or N9048WT2B | 30 MHz to 3.2 GHz | |
| Trace detectors | | |
| CISPR detectors: peak, quasi-peak, EMI average, RMS average, negative peak, voltage average | | |
| Maximum FFT bandwidth | | |
| Frequency range | Accelerated TDS = Off | Accelerated TDS = On |
| 20 Hz to 30 MHz | 30 MHz | |
| 30 MHz to 3.2 GHz | 59 MHz | 350 MHz |
| 3.2 to 3.6 GHz | 59 MHz | |
| 3.6 to 44 GHz | 12.5 MHz | |
| Real time scan bandwidth | | |
| Option N9048WT1B | 170 MHz | |
| Option N9048WT2B | 350 MHz | |
| FFT overlap | | |
| > 92% | | |
| Measurement time | | |
| 10 μ s to 30 s | | |
| Trace point range | | |
| 1 to 4,000,001 | | |
| Frequency step size | | |
| 0.25 \times resolution bandwidth | | |
| Resolution bandwidth (RBW) | | |
| EMI bandwidths (CISPR compliant) | 200 Hz, 9 kHz, 120 kHz, 1 MHz | |
| EMI bandwidths (Mil-STD-461 compliant) | 10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz | |
| Other bandwidths (-6 dB) | 1 Hz, 30 Hz, 300 Hz, 3 kHz, 30 kHz, 300 kHz, 3 MHz, 10 MHz | |
| Measurement speed | | |
| | Accelerated TDS = Off | Accelerated TDS = On |
| CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 100 ms, peak detector | 110 ms (nominal) | |
| CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 1 s, quasi-peak + EMI average detector | 2 s (nominal) | |
| CISPR band C/D, 30 MHz to 1 GHz, RBW = 120 kHz, measurement time = 10 ms, peak detector | 500 ms (nominal) | 100 ms (nominal) |
| CISPR band C/D, 30 MHz to 1 GHz, RBW = 120 kHz, measurement time = 1 s, quasi-peak + EMI average detector | 46.4 s (nominal) | 5.8 s (nominal) |

| RF preselector filters | | | | |
|------------------------|-----------------------|----------------------|----------------|-----------------------------------|
| Filter band | Accelerated TDS = Off | Accelerated TDS = On | Filter type | 6 dB bandwidth (nominal) |
| 150 kHz | x | | Fixed lowpass | 289 kHz (-3 dB corner frequency) |
| 150 kHz to 30 MHz | x | | Fixed bandpass | 36 MHz |
| 30 to 300 MHz | | x | Fixed bandpass | 320 MHz |
| 30 to 52 MHz | x | | Fixed bandpass | 28 MHz |
| 52 to 75 MHz | x | | Fixed bandpass | 39 MHz |
| 75 to 120 MHz | x | | Fixed bandpass | 63 MHz |
| 120 to 165 MHz | x | | Fixed bandpass | 71 MHz |
| 165 to 210 MHz | x | | Fixed bandpass | 69 MHz |
| 210 to 255 MHz | x | | Fixed bandpass | 71 MHz |
| 255 to 300 MHz | x | | Fixed bandpass | 68 MHz |
| 300 to 650 MHz | | x | Fixed bandpass | 515 MHz |
| 300 to 475 MHz | x | | Fixed bandpass | 284 MHz |
| 475 to 650 MHz | x | | Fixed bandpass | 305 MHz |
| 650 MHz to 1 GHz | | x | Fixed bandpass | 550 MHz |
| 650 to 825 MHz | x | | Fixed bandpass | 302 MHz |
| 825 MHz to 1 GHz | x | | Fixed bandpass | 314 MHz |
| 1 GHz | x | x | Fixed highpass | 912 MHz (-3 dB corner frequency) |
| 1.7 GHz | x | x | Fixed highpass | 1.56 GHz (-3 dB corner frequency) |
| 2.9 GHz | x | x | Fixed highpass | 2.29 GHz (-3 dB corner frequency) |

Related Literature

| Publication title | Publication number |
|---|--------------------|
| N9048B PXE EMI Receiver - Configuration Guide | 5992-3403EN |
| N9048B PXE EMI Receiver Specifications Guide | N9048-90010 |



Accelonix BV ■ Luchthavenweg 18-b ■ NL-5657 EB Eindhoven
www.accelonix.nl ■ info@accelonix.nl ■ Tel. +31-40-7501650

Learn more at: www.keysight.com

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

