



CBA 100M-400 10 KHZ TO 100 MHZ 400 WATT CLASS A BROADBAND AMPLIFIER




This low frequency amplifier can be used in conjunction with other amplifiers from the Teseq range to cover the entire frequency range from 10 kHz to 40 GHz with convenient frequency break points allowing you to optimise the power level in each range.

The Class A design ensures a high reliability, low distortion linear performance across the frequency range. This design also ensures that the amplifier will continue to operate at full power even when presented with an open or short circuit at its output.

The unit is powered from a switched mode power supply for high efficiency, high power factor and wide voltage range operation. The unit is air-cooled with integral fans, and is protected against faulty cooling by excess temperature sensing. A safety interlock connector is provided, which the user can short circuit to ground, to put the amplifier into standby mode. Front panel indicators are provided to indicate over-temperature and rf interlock operation.

- Class A linear and low distortion design
- Ideal for low frequency tests using various strip line devices
- Mismatch tolerant and unconditionally stable
- Rugged design for EMC testing
- Three year parts and labour warranty

CBA 100M-400 Performance Data

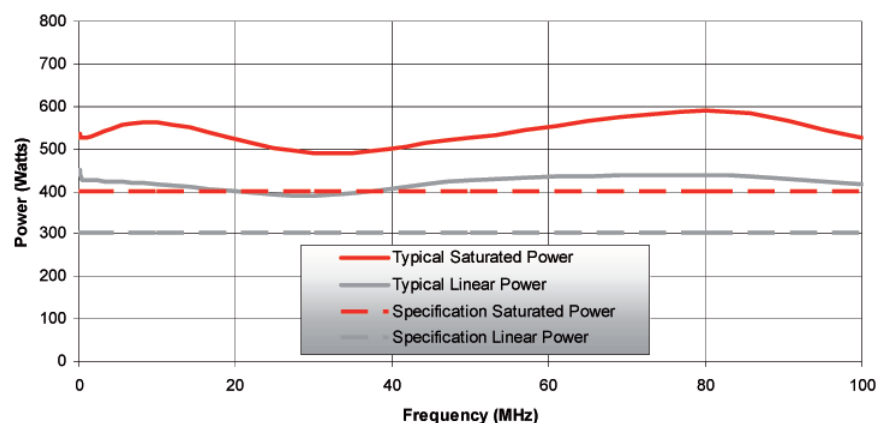



CBA 100M-400 10 KHZ TO 100 MHZ 400 WATT CLASS A BROADBAND AMPLIFIER

Key RF Parameters

Frequency range (instantaneous)	0.01 to 100 MHz
Rated output power	400 W minimum (500 W typical)
Output power at 1 dB gain compression	300 W minimum (400 W typical)
Harmonics at 250 W output power	Better than -20 dBc
Harmonics at 300 W output power	Better than -18 dBc
Gain	57 dB
Gain variation with frequency	±2 dB
Maximum input power (no damage)	+10 dBm

Impedance / VSWR

Output VSWR tolerance ¹	Infinity: 1
Stability	Unconditional
Output impedance	50 Ω
Input VSWR	2:1

Additional RF Data

Third order intercept point ²	67 dBm
RF connector style	Type N female

Electrical and Interfaces

USB interface	Optional
Safety interlock	BNC female, s / c to mute, 100 mA max.
Supply voltage (single phase)	184 to 264 Vac
Supply frequency range	47 to 63 Hz
Supply power	<2 kVA

Physical / Environmental

Case dimensions	19 inch, 9U rack, 570 mm dee
Weight	33 kg
Operating temperature range	0°C–40°C

Notes:

1. Output VSWR tolerance is specified for excitation within the permitted levels and frequency range.
2. The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.

CONTACT US!

We're there where you need us.
See details on the last page.



Advanced Test Solutions for EMC

OUR SALES & SERVICE CENTERS

China

AMETEK Commercial Enterprise (Shanghai) Co. Ltd.

Beijing Branch
Western Section, 2nd Floor
Jing Dong Fang Building (B10)
Chaoyang District
Beijing, China, 100015
T +86 10 8526 2111
chinasales@ametek.com

Shanghai Office:

Part A1, A4, 2nd floor, Building No. 1
No. 526 Fute 3rd Road East
Pilot Free Trade Zone, Shanghai 200131,
China
T +86 21 5868 5111

Guangzhou Office:

Room 1410-12, Yian Plaza
33 Jian She Liu Ma Road
Guangzhou, China
T +86 20 8363 4768

Germany

AMETEK CTS Europe GmbH

Lünener Straße 211
59174 Kamen, Deutschland
T +49 2307 26070-0
sales.cts.de@ametek.com

Great Britain

AMETEK (GB) Ltd. t/a Teseq

5 Ashville Way, Molly Millars Lane
Wokingham
Berkshire RG41 2PL
Great Britain
T +44 845 074 0660
ametekgb.service@ametek.com

Japan

AMETEK Co. Ltd.

Tokyo office

3rd floor, Shiba NBF Tower,
1-1-30 Shiba-Daimon, Minato-ku
Tokyo, 105-0012, Japan
T +81 3 6809 2401
cts-japan.sales@ametek.com

Nagoya Office

1-329 Kifune Meito-ku Nagoya-shi
Aichi-ken, 465-0058, Japan
T +81 52 709 5501

Poland

AMETEK CTS Europe GmbH

Biuro w Polsce
ul. Ogrodowa 31/35
00-893 Warszawa, Polen
T +48 518 643 512
infopolska.cts@ametek.com

Singapore

AMETEK Singapore Pte. Ltd.

No. 43 Changi South Avenue 2
#04-01 Singapore 486164
T +65 6484 2388
singaporesales.cts@ametek.com

Taiwan

AMETEK Taiwan Corp. Ltd.

10F-5, No. 120, Sec 2,
GongDaoWu Rd.,
Hsinchu City 30072, Taiwan
T +886 3 57 5099
taiwan.sales.cts@ametek.com

USA

AMETEK CTS US

52 Mayfield Avenue
Edison, New Jersey 08837, USA
T +1 732 417 0501
Toll free: +1 888 417 0501
usasales.cts@ametek.com

CARE TO LEARN MORE ABOUT AMETEK CTS.

With service and sales centers in Germany, Switzerland, China, Japan, Singapore, the USA and Great Britain, and accredited labs across the globe, we're where you need us. Like our multinational customers, AMETEK CTS is international. And we're as local as the three-man engineering office around the corner that needs help dealing with an EMC issue.



GET MORE INFO ABOUT US AT:
www.ametek-cts.com

The contacts of our global distribution partners could be found at www.teseq.com



Accelonix BV
Luchthavenweg 18b • NL-5657 EB •
Eindhoven • The Netherlands •
T: +31 40 750 1650 • E: info@accelonix.nl

AMETEK®
COMPLIANCE TEST SOLUTIONS