

CBA 400M-260 10 KHZ TO 400 MHZ 260 WATT CLASS A BROADBAND AMPLIFIER




- Class A linear and low distortion design
- High reliability gallium arsenide technology
- Mismatch tolerant and unconditionally stable
- Wide instantaneous bandwidth
- Remote control option
- Three year parts and labour warranty

Designed specifically for automotive, military and aerospace BCI and other susceptibility EMC testing, this mismatch tolerant Class A amplifier delivers power continuously into the varying match typically associated with this type of testing.

The GaAs Class A push pull design ensures a high reliability, low distortion linear performance across the frequency range. This design also ensures that the amplifier will continue to operate at full power even when presented with an open or short circuit at its output.

The unit is powered from a switched mode power supply for high efficiency, high power factor and wide voltage range operation. The unit is air-cooled with integral fans, and is protected against faulty cooling by excess temperature sensing. For added flexibility, two safety interlock BNC connectors are provided on the rear panel which allows either short circuit or open circuit to mute the output from the amplifier. Front panel indicators are provided to indicate over-temperature and rf interlock operation.

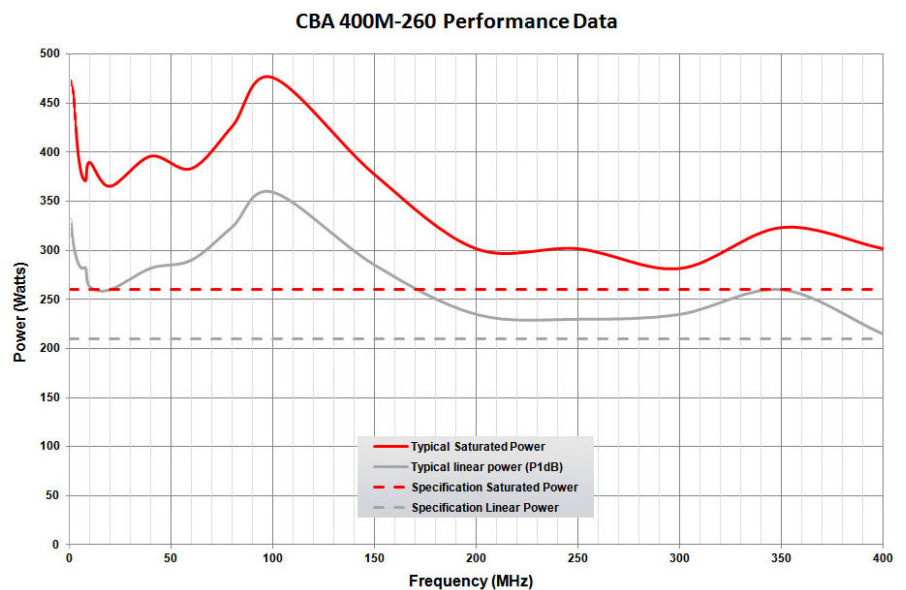



CBA 400M-260 10 KHZ TO 400 MHZ 260 WATT CLASS A BROADBAND AMPLIFIER

| Key RF Parameters | |
|---------------------------------------|--------------------------------|
| Frequency range (instantaneous) | 10 kHz to 400 MHz |
| Rated output power | 260 W minimum (>300 W typical) |
| Output power at 1 dB gain compression | 210 W minimum (>240 W typical) |
| Harmonics at 210 W output power | Better than -20 dBc |
| Gain (nominal) | 54 dB |
| Gain variation with frequency | ±3 dB |
| Maximum input power (no damage) | +10 dBm |

| Impedance / VSWR | |
|------------------------------------|---------------|
| Output VSWR tolerance ¹ | Infinity:1 |
| Stability | Unconditional |
| Output impedance | 50 Ω |
| Input VSWR | 2:1 |

| Additional RF Data | |
|--|---------------|
| Third order intercept point ² | 64 dBm |
| RF connector style | Type N female |

| Electrical and Interfaces | |
|---------------------------|---|
| USB interface | Optional |
| Dual safety interlock | Two BNC female connectors S / C to mute and O / C to mute |
| Supply voltage | 100 to 264 VAC |
| Supply frequency range | 45 to 63 Hz |
| Supply power | <2 kVA |

| Physical / Environmental | |
|-----------------------------|-------------------------------|
| Case dimensions | 19 inch, 6U case, 440 mm deep |
| Weight | 30 kg |
| Operating temperature range | 0°C–40°C |

Notes:

1. Output VSWR tolerance is specified for excitation within the permitted levels and frequency range.
2. The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.

CONTACT US!

We're there where you need us.
See details on the last page.



Advanced Test Solutions for EMC

CARE TO LEARN MORE ABOUT AMETEK CTS.

With service and sales centers in Germany, Switzerland, China, Japan, Singapore, the USA and Great Britain, and accredited labs across the globe, we're where you need us. Like our multinational customers, AMETEK CTS is international. And we're as local as the three-man engineering office around the corner that needs help dealing with an EMC issue.



GET MORE INFO ABOUT US AT:
www.ametek-cts.com

AMETEK®
COMPLIANCE TEST SOLUTIONS

OUR SALES & SERVICE CENTERS

China

AMETEK Commercial Enterprise (Shanghai) Co. Ltd.

Beijing Branch
Western Section, 2nd Floor
Jing Dong Fang Building (B10)
Chaoyang District
Beijing, China, 100015
T +86 10 8526 2111
chinasales@ametek.com

Shanghai Office:

Part A1, A4, 2nd floor, Building No. 1
No. 526 Fute 3rd Road East
Pilot Free Trade Zone, Shanghai 200131,
China
T +86 21 5868 5111

Guangzhou Office:

Room 1410-12, Yian Plaza
33 Jian She Liu Ma Road
Guangzhou, China
T +86 20 8363 4768

Germany

AMETEK CTS Europe GmbH

Lünener Straße 211
59174 Kamen, Deutschland
T +49 2307 26070-0
sales.cts.de@ametek.com

Great Britain

AMETEK (GB) Ltd. t/a Teseq

5 Ashville Way, Molly Millars Lane
Wokingham
Berkshire RG41 2PL
Great Britain
T +44 845 074 0660
ametekgb.service@ametek.com

Japan

AMETEK Co. Ltd.

Tokyo office

3rd floor, Shiba NBF Tower,
1-1-30 Shiba-Daimon, Minato-ku
Tokyo, 105-0012, Japan
T +81 3 6809 2401
cts-japan.sales@ametek.com

Nagoya Office

1-329 Kifune Meito-ku Nagoya-shi
Aichi-ken, 465-0058, Japan
T +81 52 709 5501

Poland

AMETEK CTS Europe GmbH

Biuro w Polsce
ul. Ogrodowa 31/35
00-893 Warszawa, Polen
T +48 518 643 512
infopolska.cts@ametek.com

Singapore

AMETEK Singapore Pte. Ltd.

No. 43 Changi South Avenue 2
#04-01 Singapore 486164
T +65 6484 2388
singapore.sales.cts@ametek.com

Taiwan

AMETEK Taiwan Corp. Ltd.

10F-5, No. 120, Sec 2,
GongDaoWu Rd.,
Hsinchu City 30072, Taiwan
T +886 3 57 5099
taiwan.sales.cts@ametek.com

USA

AMETEK CTS US

52 Mayfield Avenue
Edison, New Jersey 08837, USA
T +1 732 417 0501
Toll free: +1 888 417 0501
usasales.cts@ametek.com

The contacts of our global
distribution partners could be
found at www.teseq.com



Accelonix BV
Luchthavenweg 18b • NL-5657 EB •
Eindhoven • The Netherlands •
T: +31 40 750 1650 • E: info@accelonix.nl