

VSS 500N12-SERIES

VOLTAGE SURGE SIMULATOR



FOR TESTS ACCORDING TO ...

- › EN 60335-1
- › IEC 384-14
- › IEC 60060
- › IEC 60335-1
- › IEC 60950-1
- › IEC 61180-1
- › IEC 61180-2
- › IEC 60664

VOLTAGE SURGE SIMULATION

The voltage surge simulator VSS 500N12-series generates high voltage transients as required by several IEC standards. The voltage surge pulses are used to test the isolation (voltage withstand) capability of components, sockets, connectors, cables and many other items.

Spark over detection and voltage/current measuring functions are included in the generator.

HIGHLIGHTS

- › Surge voltage up to 12kV
- › Wave form 1.2/50us
- › Built-in source impedance
- › Interlock
- › Warning lamp control
- › Voltage/current measurement
- › Spark-over detection
- › Manual operation
- › USB (optical link) and GPIB interface

APPLICATION AREAS



COMPONENTS



RESIDENTIAL

TECHNICAL DETAILS

MODEL OVERVIEW

VSS 500N12 MODELS	
VSS500N12	12kV Pulse generator, 1.2/50us, as per IEC 60060, 500ohm impedance and low energy
VSS 500N12.1	12kV Pulse generator, 1.2/50us, as per IEC 60335, 40ohm impedance and low energy
VSS 500N12.6	12kV Pulse generator, 1.2/50us, as per IEC 61180-1, 50ohm impedance
VSS 500N12.7	12kV Pulse generator, 1.2/50us, as per IEC 60950, 13 ohm + 25 ohm impedance, special pulse circuit, see datasheet VSS500N12.7

TECHNICAL DATA

VOLTAGE SURGE SIMULATOR, PULSE 1.2/50US	
Voltage (o.c.)	500V - 12,000V ± 10%
Pulse front time	1.2us ± 30%
Pulse time to half value	50us ± 20%
Current (s.c.)	max. 24A ± 10%
Int. resistor	500ohm ± 10% (VSS 500N12) 40ohm ± 10% (VSS 500N12.1) 50ohm ± 10% (VSS 500N12.6)
Polarity	Positive/negative/alternating
Event counter	1 - 30,000 or endless

TRIGGER	
Automatic	Automatic pulse release
Manual	Single pulse release
External	External pulse release
CRO trigger	5V trigger signal for oscilloscope
Synchronisation	0° - 360°, resolution 1°
Repetition rate	max. 1Hz (1s - 999s)

TECHNICAL DATA

OUTPUT	
Direct	Via HV connector; Zi = 500ohm or as per selected model(40ohm or 50ohm)

MEASUREMENTS	
CRO Ũ-monitor	10Vp at 12,000V
CRO Î-monitor	10Vp at 24A
Peak voltage	12,000V in the LCD display
Peak current	24A in the LCD display
Current limiter	Resolution 0.1A for Ri = 500ohm Resolution 1.0A for Ri = 40ohm


TEST ROUTINES	
Quick Start	Immediate start; easy-to-use and fast
User Test routines	Change Polarity after n pulses Change voltage after n pulses
Service	Service, setup, self test

INTERFACE	
Optical interface	Opto link, 3 m cable USB A connector
Parallel interface	IEEE 488, addresses 1 - 30

GENERAL DATA	
Dimensions, weight	19"/3HU, approx. 15kg
Supply voltage	115/230V +10/-15%
Fuses	2 x 2AT (230V) or 2 x 4AT (115V)

OPTIONS	
HV Contacts	Pair of gun-type HV contacts for safe application of the HV pulses to the DUT
iec.control	Remote control and documentation software, including standard test routines and reporting capabilities.

COMPETENCE WHEREVER YOU ARE

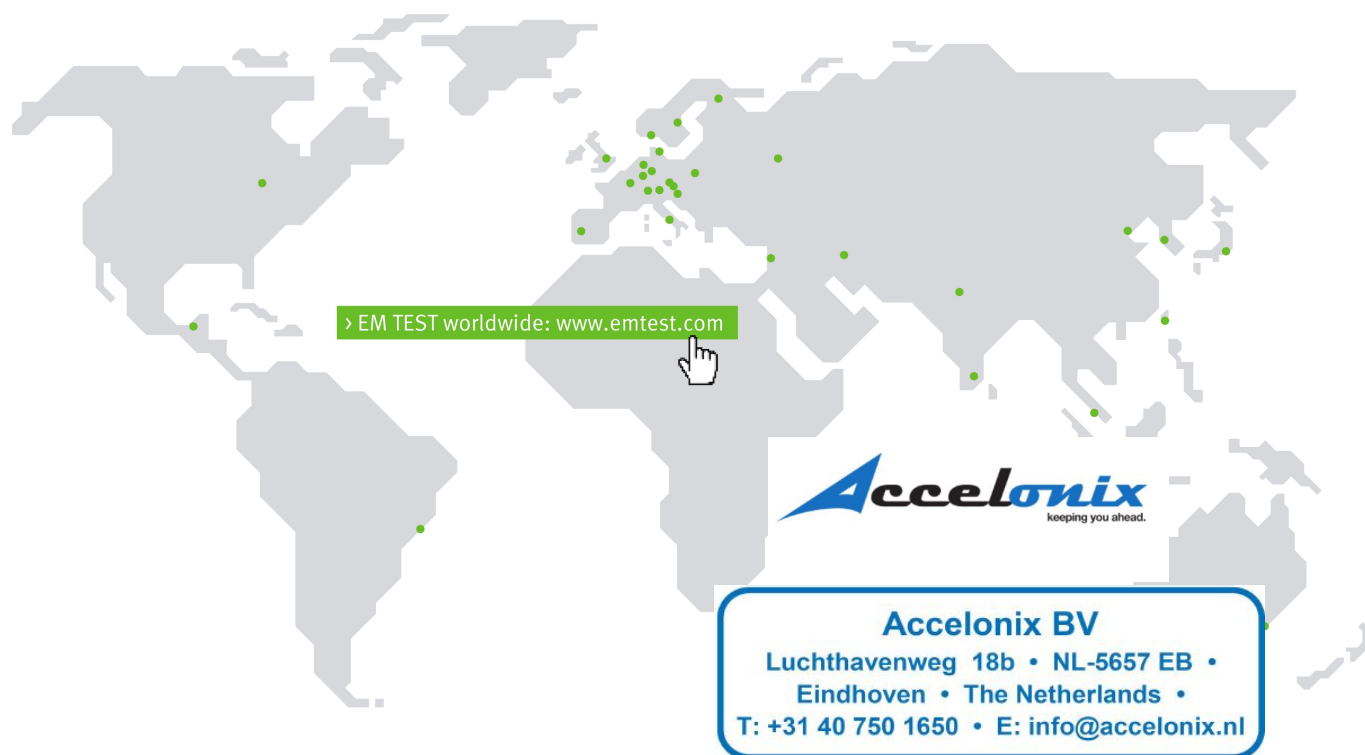

Accelonix BV
 Luchthavenweg 18b • NL-5657 EB •
 Eindhoven • The Netherlands •
 T: +31 40 750 1650 • E: info@accelonix.nl

CONTACT EM TEST DIRECTLY

Switzerland

EM TEST (Switzerland) GmbH › Sternenhofstraße 15 › 4153 Reinach › Switzerland
 Phone +41 (0)61/7179191 › Fax +41 (0)61/7179199
 Internet: www.emtest.ch › E-mail: sales.emtest@ametek.com

Germany

AMETEK CTS Germany GmbH › Lünener Straße 211 › 59174 Kamen › Deutschland
 Phone +49 (0)2307/26070-0 › Fax +49 (0)2307/17050
 Internet: www.emtest.com › E-mail: info.cts@ametek.de

France

EM TEST FRANCE › Le Trident - Parc des Collines › Immeuble B1 - Etage 3 › 36, rue Paul Cézanne › 68200 Mulhouse › France
 Phone +33 (0)389 31 23 50 › Fax +33 (0)389 31 23 55
 Internet: www.emtest.fr › E-mail: info@emtest.fr

Poland

EM TEST Polska › ul. Ogrodowa 31/35, 00-893 Warszawa › Polska
 Phone +48 (0)518 64 35 12
 Internet: www.emtest.com/pl › E-mail: infopolska.emtest@ametek.com

USA / Canada

AMETEK Compliance Test Solutions › 52 Mayfield Ave. › Edison › NJ 08837
 Phone +1 (732) 417-0501
 Internet: www.emtest.com › E-mail: sales.emtest@ametek.com

P.R. China

E & S Test Technology Limited › Rm 913, Leftbank › No. 68 Bei Si Huan Xi Lu › Haidian District › Beijing 100080 › P.R. China
 Phone +86 (0)10 82 67 60 27 › Fax +86 (0)10 82 67 62 38
 Internet: www.emtest.com › E-mail: info@emtest.com.cn

Republic of Korea

EM TEST Korea Limited › #405 › WooYeon Plaza › #986-8 › YoungDeok-dong › Giheung-gu › Yongin-si › Gyeonggi-do › Korea
 Phone +82 (31) 216 8616 › Fax +82 (31) 216 8616
 Internet: www.emtest.co.kr › E-mail: sales@emtest.co.kr

Information about scope of delivery, visual design and technical data correspond with the state of development at time of release. Subject to change without further notice.