

THE NEW GLOBAL POWER FOR ELECTROMAGNETIC COMPATIBILITY.

THE WORLD'S SPEED IS OUR BEAT



RF/Microwave Amplifiers

The MILMEGA '80RF' Series Solid State Amplifier Range

Model: 80RF1000-300 **Broadband Amplifier**




- Colour led bar graph displays on the front panel giving an indication of incident and reflected power.
- > GPIB, RS232, USB and Ethernet remote fitted as standard.
- > The unique 5 year parts and labour warranty on all MILMEGA amplifiers.

The 80RF series of solid state power amplifiers follows the MILMEGA tradition for compact, upgradeable microwave power amplifier solutions with field proven reliability. Developed to cover the frequency band 80 -1000 MHz in a single band.

Designed specifically for EMC testing this mismatch tolerant amplifier delivers continuous power into a poor and variable match typically associated with EMC antenna.

The amplifier is designed with upgradability in mind. If more power is required this amplifier can be integrated with further additional units to achieve power levels of 600W or 1200W P1dB.

The added benefit is that this unit can still be used individually if required as they can be easily disconnected and used as stand-alone units.

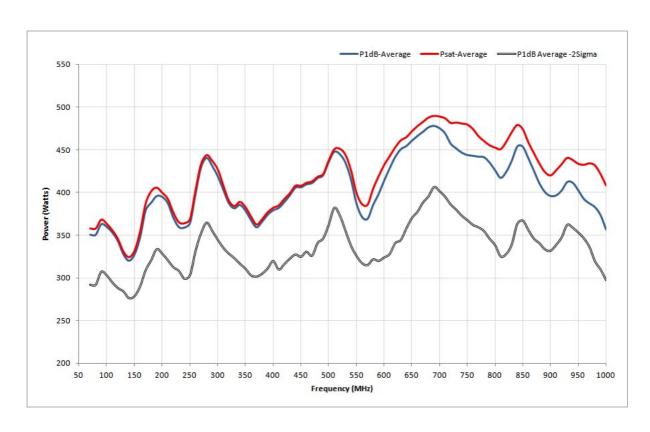

DS80RF1000-300-Issue-1.3 1

Amplifier Specification

| 80 to 1000 MHz | Minimum Psat | Minimum P1dB |
|----------------|--------------|--------------|
| Power | 300 W | 275 W |

| System Parameters | Nominal | Minimum | Maximum |
|---------------------------------|--------------------------------|---------|------------|
| Harmonics at P1dB | -20 dBc | | -15dBc |
| Gain | 62 dB | 58dB | 70dB |
| Gain variation with frequency | | | +/- 3.5 dB |
| Noise figure | 10.0 dB | | |
| Input Power (no damage) | | | +10 dBm |
| Output VSWR tolerance | Infinite any phase | | |
| Stability | Unconditional | | |
| Output impedance | 50 Ohm | | |
| Output VSWR | 2:1 | | |
| Input VSWR | 2:1 | | |
| Third order intercept point IP3 | 8dB > P1dB | | |
| Spurious | -80 dBc | | |
| Safety interlock | Via rear panel D-sub connector | | |
| Supply Voltage | 100 to 240 VAC | | |
| Supply Frequency | 47 to 63 Hz | | |
| Supply Power | 1.8 kVA (typical full power) | | |
| RF Input | Type N female | | |
| RF Output | Type N female | | |
| Dimension | 19 inch, 3U case, 582mm De | ер | |
| Weight | 30 kg | | |
| | | | |

Amplifiers that meet today's and tomorrow's needs through upgradability. Amplifiers in this family include the 80RF1000-175,80RF1000-300,80RF1000-500 and 80RF1000-1200 with the MILMEGA Modularity, Upgrade path and 5 Year Warranty.

Note: Upgrade is only possible up to the highest power model currently available



Specifications subject to change without notice. MILMEGA is an ISO accredited Company. Products are designed and manufactured under strict quality and environmental requirements of ISO 9001.



Accelonix BV

Luchthavenweg 18b • NL-5657 EB •
Eindhoven • The Netherlands •
T: +31 40 750 1650 • E: info@accelonix.nl



MILMEGA Limited Park Road, Ryde, Isle of Wight PO33 2BE United Kingdom Tel. +44 (0) 1983 618004 Fax. +44 (0) 1983 811521 sales@milmega.co.uk www.milmega.co.uk