

LT 600

LT Range: 20 MHz - 1000 MHz / 600 W CW



Prana LT 600

- Class A solid state
- Broadband (instantaneous single band): 20 MHz – 1000 MHz
- Typical output power : 600 W CW
- Linear output power (1 dB compression) guaranteed with harmonics <-20 dBc:
 - P1dB > 350 W and H < -20 dBc up to 80 MHz
 - P1dB > 600 W and H < -20 dBc from 80 to 450 MHz
 - P1dB > 450 W and H < -20 dBc from 450 MHz to 1000 MHz
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Reliable, efficient and robust
- 19" Cabinet on wheels
- 3 years standard warranty

Maintenance

- Amplifier designed for minimal maintenance
 - Easy access to all parts
 - Modular design
 - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

Versions

- LT 600 DC amplifier with:
 - Multicolor LCD display with touch panel
 - Digital control
 - IEEE 488 GPIB, Ethernet, USB, RS232 Communications
 - Temperature controlled fans
 - Safety interlock
 - Integrated dual directional coupler
 - Display of instantaneous incident and reflected power

LT Range


- LT 90 => 90 W CW
- LT 160 => 160 W CW
- LT 320 => 320 W CW
- LT 600 => 600 W CW

Extra

- External coupler
- RF Power cable
- Switching unit

LT 600

LT Range: 20 MHz - 1000 MHz / 600 W CW

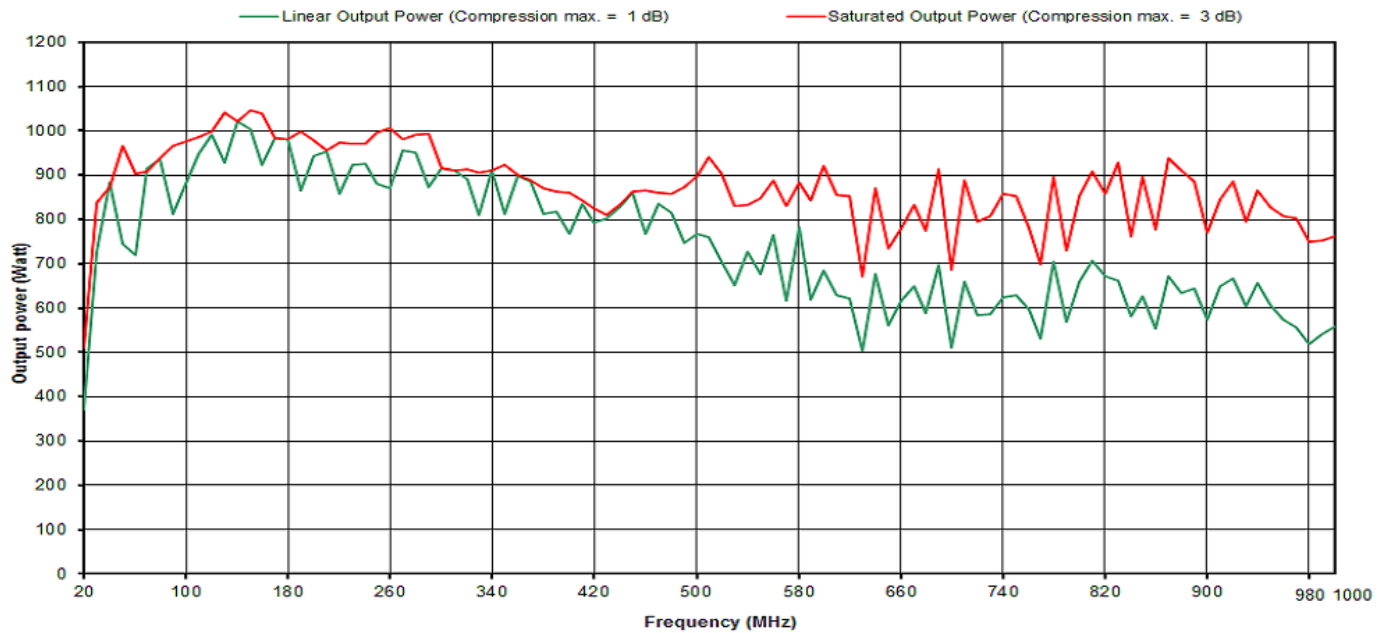

Specifications

Frequency bandwidth	20 MHz - 1000 MHz
Typical output power	600 W
Power at 3 dB compression	450Wmin up to 80MHz/700Wmin from 80 to 450MHz/600Wmin from 450MHz to 1GHz
Power at 1 dB compression	350Wmin up to 80MHz/600Wmin from 80 to 450MHz/450Wmin from 450MHz to 1GHz
Harmonics distortion	H2,H3 < -20 dBc for the output power at 1 dB compression limit
Class type	Class A
Gain	56 dB
Linear power gain flatness	± 4 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1max
Output impedance	50 ohms / VSWR: 2:1max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type 7/16 fem. (front or rear panel) – other connector type on request
Integrated bidirectional power coupler	Coupling factor 62 dB typ.
Power coupling connector	Type N fem. (front or rear panel)
Safety interlock	Connector type BNC
Digital control	Transistors, power supplies, internal temperatures and fans
Mismatch protection	Self limitation for reflected power > 350 W
Communication interface	Ethernet, USB, GPIB, RS232
Color LCD display with touch screen	Status, faults, direct and reverse instantaneous power
Ambient operating temperature	0 °C / + 45 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air with fan speed control: 240 l/sec max (self contained fans)
Mains voltage	47-63 Hz, 3 phases (star or delta)
Rated current	5 kVA
Dimensions	600 x 840 x 1320 mm (24U) / 23.6 x 33.1 x 51.9 in (24U)
Weight	199 kg / 438 lb



Accelonix BV
Luchthavenweg 18b • NL-5657 EB •
Eindhoven • The Netherlands •
T: +31 40 750 1650 • E: info@accelonix.nl

LT60004SEP2017 - Electrical and Mechanical Specifications subject to change without notice.

PRANA R&D - 52 Avenue de la Libération CS 10161 - 19361 MALEMORT Cedex - France
Tel : 33(0)5 55 86 49 40 - Fax : 33(0)5 55 86 49 45



www.prana-rd.com
Made in France