



Prana GN 7000

- Class A solid state
- Broadband (instantaneous single band): 100 kHz – 200 MHz
- Frequency extension between 80 kHz to 250 MHz upon request (with limited specifications)
- Typical output power : 7000 W CW
- Linear output power (1 dB compression) guaranteed with harmonics <-20 dBc:
 - P1dB > 5000 W and H<-20 dBc up to 100 MHz and
 - P1dB > 2000 W and H<-20 dBc from 100 MHz to 200 MHz
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Reliable, efficient and robust
- 2 x 19" Cabinet on wheels
- 3 years standard warranty

Maintenance

- Amplifier designed for minimal maintenance
 - Easy access to all parts
 - Modular design
 - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

Versions

- GN 7000 DC amplifier with:
 - Display
 - Digital control
 - IEEE 488 GPIB Communication
 - Integrated bidirectional coupler
 - display of instantaneous power


GN Range

- GN 500 => 500 W CW
- GN 1000 => 1000 W CW
- GN 2000 => 2000 W CW
- GN 3500 => 3500 W CW
- GN 7000 => 7000 W CW
- GN 12000 => 12000 W CW

Extra

- External coupler
- Bulk Current Injection + Calibration JIG
- RF Power cable
- Switching unit

GN7000 POWER AMPLIFIER 7000W / 100 KHz - 200MHz

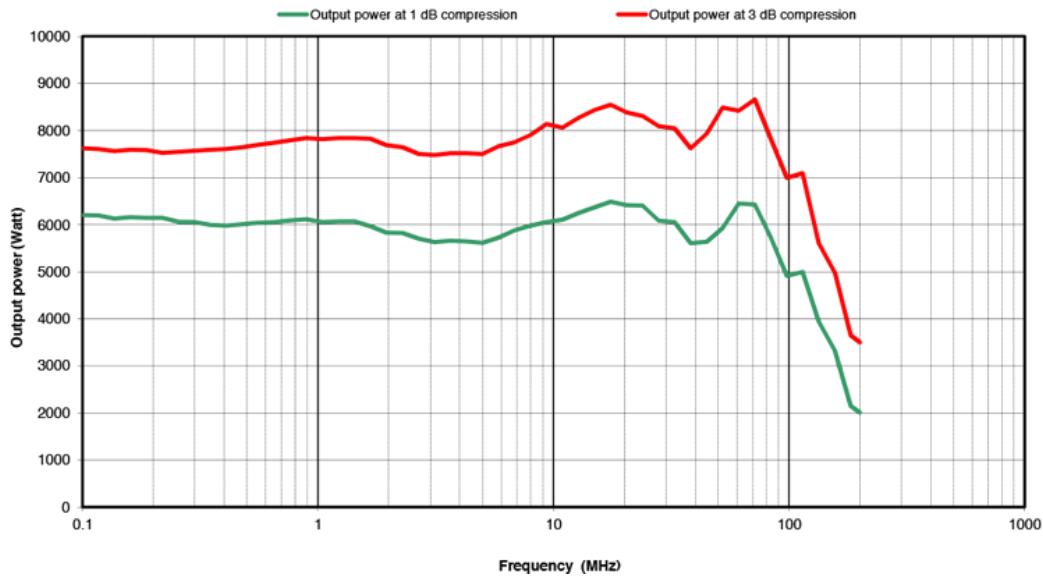

Specifications

Frequency bandwidth	100 kHz - 200 MHz (Frequency extension between 80 kHz to 250 MHz upon request)
Typical output power	7000 W
Power at 3 dB compression	6500 W min. up to 100 MHz / 3500 W min. from 100 MHz to 200 MHz
Power at 1 dB compression	5000 W min. up to 100 MHz / 2000 W min. from 100 MHz to 200 MHz
Harmonics distortion	H2,H3 < -20 dBc for the output power at 1 dB compression limit
Class type	Class A
Gain	65 dB
Linear power gain flatness	± 3.5 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1 max
Output impedance	50 ohms / VSWR: 2:1 max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type EIA 1-5/8 (rear panel)
Integrated bidirectional power coupler	Coupling factor 69 dB typ.
Power coupling connector	Type N fem. (front or rear panel)
Safety interlock	Connector type BNC
Digital control	Transistors, power supplies and internal temperature
Mismatch protection	Self limitation for reflected power > 4000 W
Communication interface	IEEE 488
4 lines digital display	Status, faults, (direct and reverse instantaneous power for DC version)
Ambient operating temperature	0 °C / + 35 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air: 2 x 480 l/sec max. (self contained fans)
Mains voltage	47-63 Hz, 3 phases (star or delta)
Rated current	29 kVA
Dimensions	2 x (600 x 840 x 1860 mm) (36U) / 2 x (23.6 x 33.1 x 73.2 in)
Weight	400 + 340 kg / 882 + 749 lb



Accelonix BV
 Luchthavenweg 18b • NL-5657 EB •
 Eindhoven • The Netherlands •
 T: +31 40 750 1650 • E: info@accelonix.nl